
## • Ball screw specifications

	-		,			
Shaft diameter (mm) - Lead (mm)	15 - 5			+ T	יייל יו	Т
Number of circuits /	2.5 turns 1 circuit /			<u>ه</u>	+ 👯	
Thread direction	Right-hand		)5	1	2	 M6×1
Ball diameter (mm)	3.175		Ö.Ö			(Oil hole)
Root diameter (mm)	12.5		17±0.05	6	; 	
Series	GW	GY				less
Basic dynamic load rating C (N)	5100		1	1 🕂	<b>₽</b>	5
Basic static load rating C0 (N)	10500					53 A
Accuracy grade /	C7 / Y	C10 / Y	34		S	F (
Axial clearance symbol	0771	01071			$\mathbf{F}$	r
Axial clearance (mm)	0.030 or less	0.100 or less		F=		18
Preload torque (N·cm)			13±0.	05		or less
Recirculation system	Tube method			A		-1
Wiper	Lip seal				A	
Lubricant	Alvania Grease S2					
Phosphate coating	Nut alone	Screw shaft, nut				

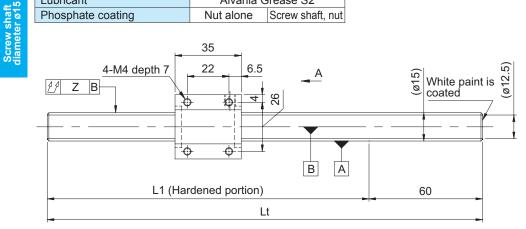

Model No. (Unfinished shaft ends)	L1	Lt	Maximum stroke (L1 - nut length)
GW1505DS-NKLR-0600A	540	600	505
GW1505DS-NKLR-1200A	1140	1200	1105
GY1505DS-NKLR-0600A	540	600	505
GY1505DS-NKLR-1200A	1140	1200	1105


• At the time of delivery, grease is inserted inside of the nut, with rust-preventive oil also applied. Before and during use, apply lubricant where appropriate.

## • Shaft end finish type

Standard rolled ball screws are available with KURODA's recommended shaft end finish types for each size.

Other than KURODA's recommended shaft end finish types described below, additional machining including keyways, tapped holes, and D-cut processing are also available if requested. Please contact KURODA with your orders. Model examples for finished shaft ends are described below. **Model example:** Unfinished shaft ends (See left figure)  $\rightarrow$  Finished shaft ends

GY1505DS-NKLR-1200A → GY1505DS-NKLR-<u>1195X1128</u>-CAY →Thread length →Overall screw shaft length

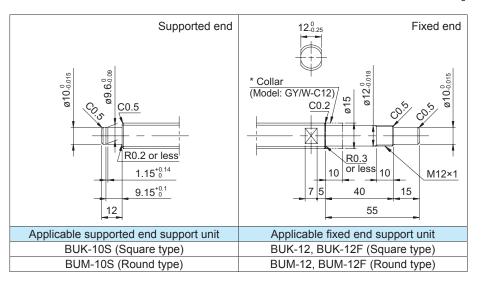

## • Optional specifications

 $\bullet$  Anticorrosive black coating (coating thickness: 1 to 2  $\mu m)$  is available.

Lead accuracy	Accuracy of each part		Mass
Cumulative lead error	W	Z	(kg)
0.05/300	0.017	0.070	1.05
		0.170	1.88
0.21/300		0.140	1.05
		0.400	1.88

D-38