
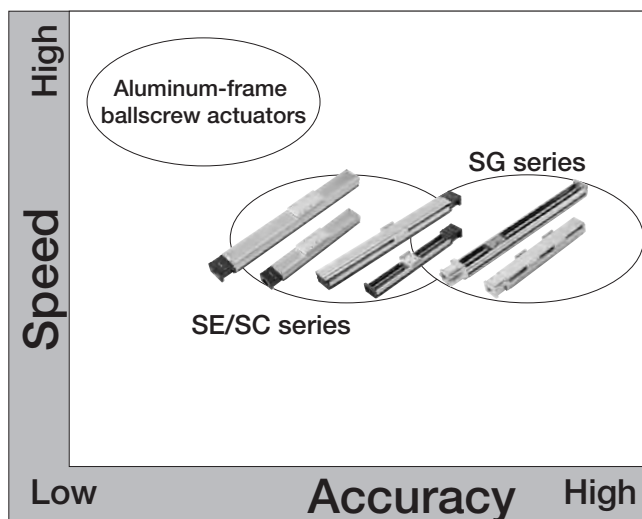


BALLSCREW ACTUATORS

A ballscrew actuator of KURODA is a compact single-axis unit consisting of a ball screw and a slide guide. With its slide block set in U-guide rail, the actuator has achieved low-profile design and compact shape, making it possible to considerably reduce necessary space as compared with the usual table type structure. Despite of its compact structure, the actuator with U-guide rail shows high rigidity against bending moment and deflection, and it can be applied to a structure supported by one end. The linear motion unit, which is gothic arched and in 4 points-contact structure, makes it possible to deliver high precision and high rigidity.

POSITIONS OF BALLSCREW ACTUATORS

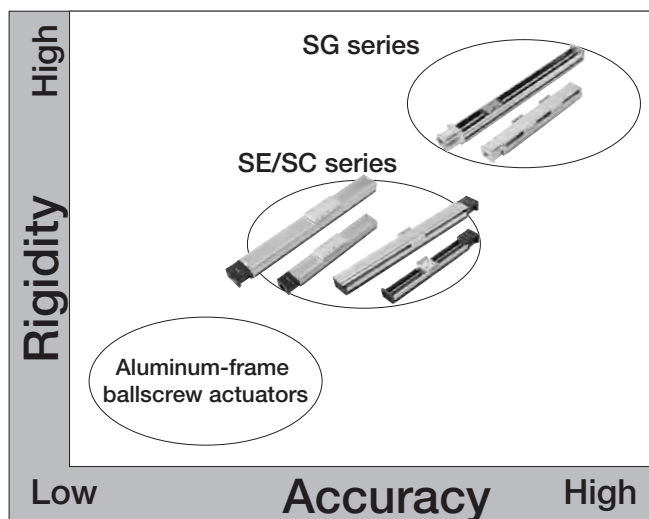

WIDE VARIATIONS

Model No.	SG series						SE series				SC series (Note 2)			
	SG20	SG26	SG33	SG3320	SG46	SG55	SE15	SE23	SE30	SE45	SC23	SC30	SC45	
Performance grade (Note 1)	P: Repeated positioning accuracy $\pm 1 \mu\text{m}$ H: Repeated positioning accuracy $\pm 3 \mu\text{m}$						H: Repeated positioning accuracy $\pm 3 \mu\text{m}$ (Note 3) U: Repeated positioning accuracy $\pm 5 \mu\text{m}$ W: Repeated positioning accuracy $\pm 10 \mu\text{m}$							
Screw shaft dia. (mm)	6	8	10	12	15	20	6	8	10	15	8	10	15	
Lead (mm)	1	○					○							
	2		○	●			○	○	●		○	●		
	4							●	○		●	○		
	5	○	○	○		●	●		○	○	○	○	○	
	8								●			●		
	10			○		○	●			○	○		○	○
	20				○	○	○			●	○		●	○

○ : In-stock items ● : Manufactured by order

(Note 1) The above table shows precision information on repeated positioning accuracy in particular, as an example. Performance of actuators may be different from the values shown above, depending on applied options and usage. For other precision information, refer to description pages for each series.


(Note 2) SC series is a full-cover version of SE series ballscrew actuators. For more information, refer to front matter 5, pages 6 and 89 to 105.

(Note 3) Performance grade H is manufactured by order.

FEATURES OF SG/SE SERIES

■ No necessity for adjustment

Ball screw and slide guide are integrated in ballscrew actuator, eliminating the need for complicated fine adjustment and reducing the number of working processes to a great extent.

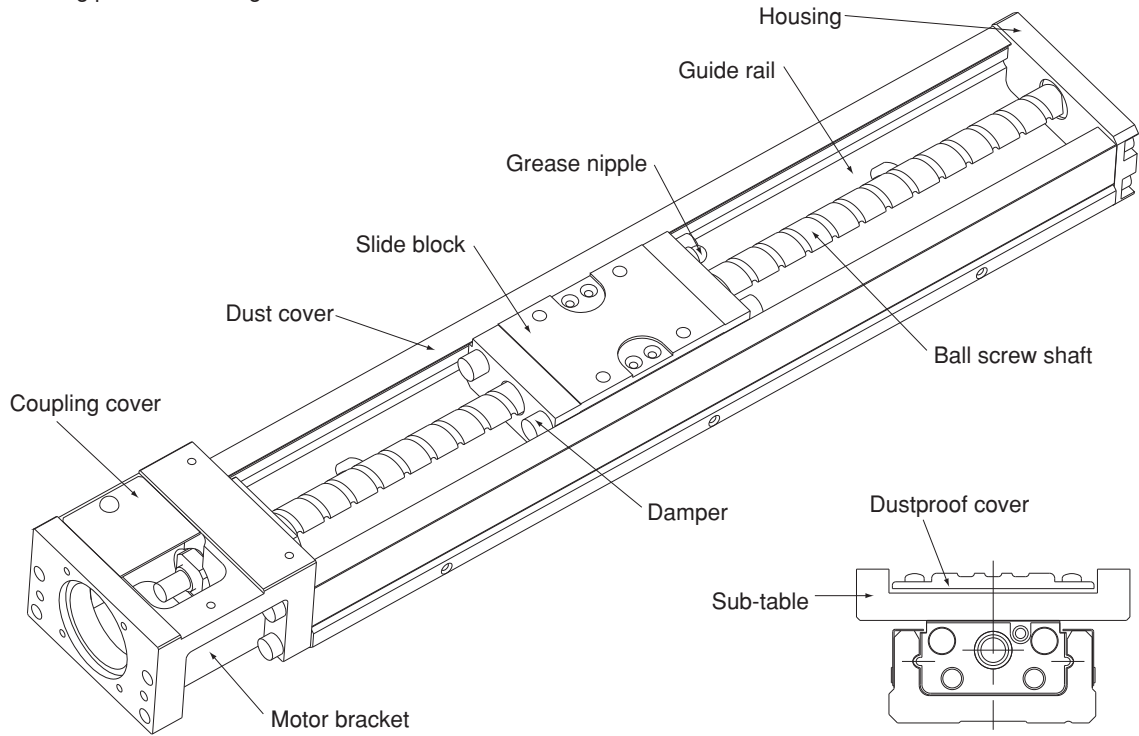


■ High rigidity

With U-guide rail, rigidity of ballscrew actuator has remarkably improved despite of its compact structure, making it possible to be applied even to a structure supported at only one end.


■ High accuracy

Linear motion unit uses "4 or 2 Ballway of 4 points-contact" structure to assure high rigidity. Guide rail, slide block and ball screw shaft are precisely worked, making accurate positioning possible.

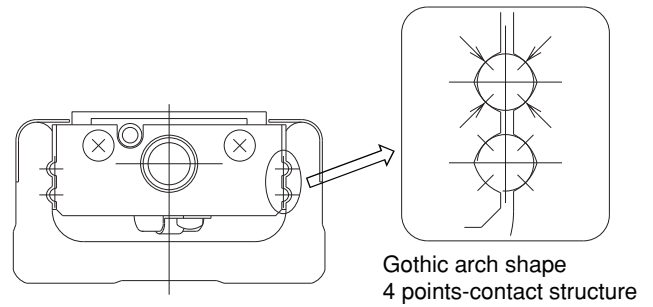


■ Space-saving

With its slide block set in U-guide rail, the actuator has achieved low-profile design and compact shape, making it possible to considerably reduce necessary space as compared with usual table type structure.

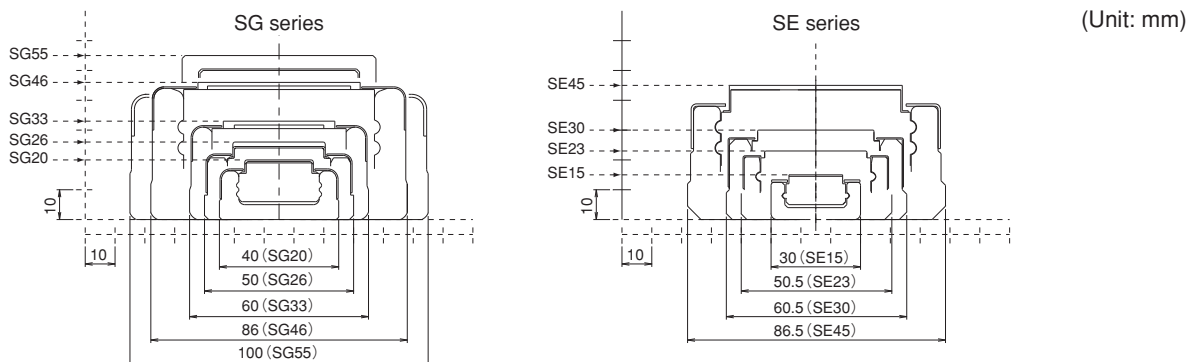

KEY COMPONENTS AND MATERIALS OF SG AND SE SERIES

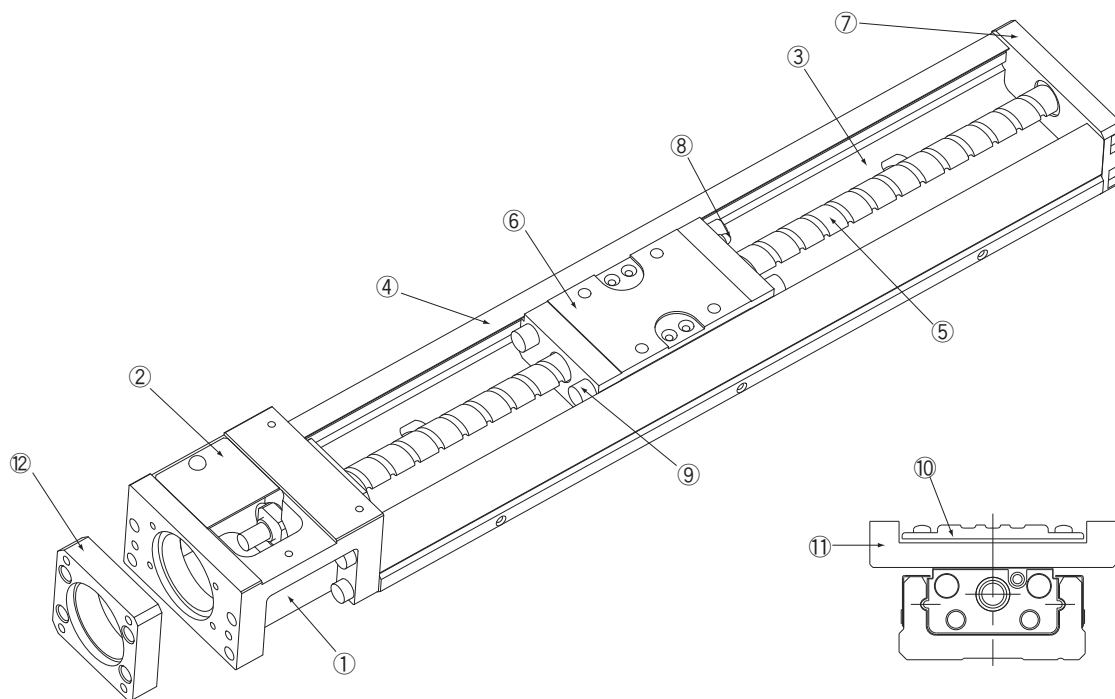


No.	Part name	Material	Remarks
①	Motor bracket	Aluminum alloy	Anodized treatment or baking finish
②	Coupling cover	Aluminum alloy	Anodized treatment
③	Guide rail	Stainless steel (SG20, SG26) Carbon steel (SG33, SG46, SG55, SE15, SE23, SE30, SE45)	Black coating (Note 1)
④	Dust cover	Aluminum alloy	Anodized treatment
⑤	Ball screw shaft	Chromium-molybdenum steel (SG series) Carbon steel (SE series)	
⑥	Slide block	Chromium-molybdenum steel	
⑦	Housing	Aluminum alloy	Anodized treatment or baking finish
⑧	Grease nipple	Stainless steel	
⑨	Damper (Note 2)	Synthetic rubber	
⑩	Dustproof cover	Aluminum alloy	Anodized treatment
⑪	Sub-table	Aluminum alloy	Anodized treatment
⑫	Intermediate flange	Aluminum alloy (SG20, SG26, SE15, SE23, SE30, SE45) Carbon steel (SG33, SG46, SG55)	Anodized treatment Black coating

(Note 1) Guide rails made from stainless steel are not surface-treated.

(Note 2) Damper position of SG series is different from SE series. For more information, refer to dimensions of each series.

(Note 3) Stainless steel is used for bolts and machine screws to joint components of actuator.

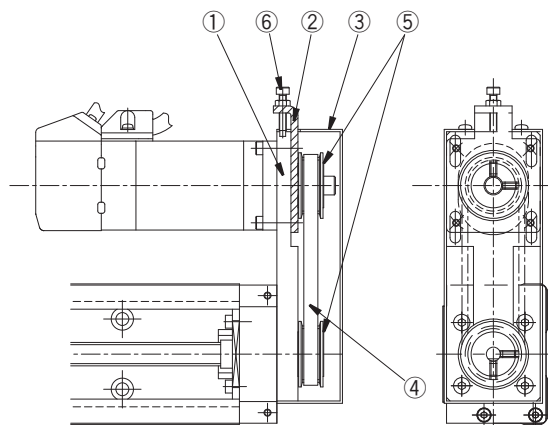


No.	Part name	Material	Remarks
①	Motor mounting plate	Rolled steel	Black coating
②	Tension plate	Stainless steel	
③	Pulley cover	Stainless steel (SG series) Cold-rolled steel plate (SE/SC series)	Anti corrosive black coating (Note 4)
④	Timing belt	Resin	
⑤	Timing pulley	Aluminum alloy	
⑥	Tension bolt	Stainless steel	

(Note 4) Anti corrosive black coating of pulley cover applies to SE and SC series.

FEATURES OF SC SERIES (FULL-COVER TYPE)


Full-cover type SC series, built on KURODA SE series, has remarkably improved its dust-preventive performance.

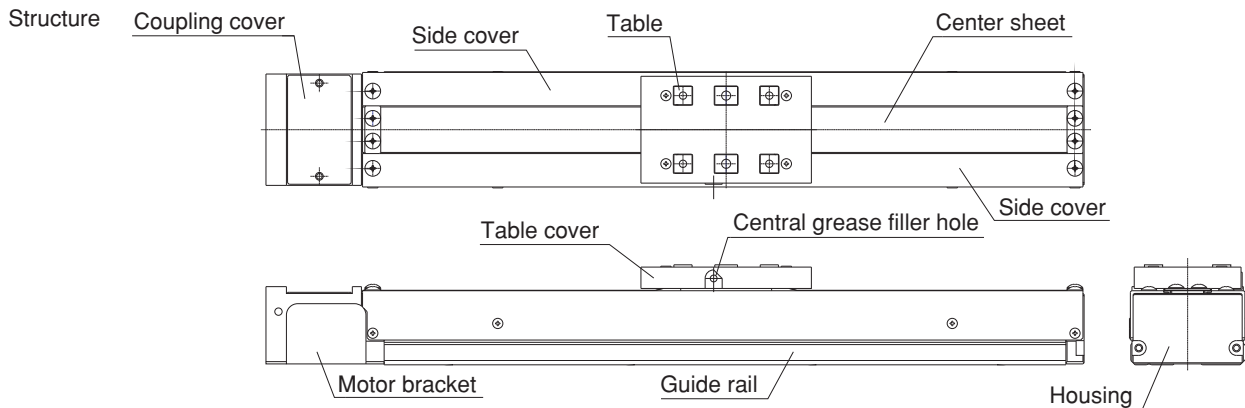


Remarkably improved dust prevention!

Compared to SE series with dustproof cover, dust prevention has been remarkably improved through making clearance on side face of actuator as narrow as it can be and effectively applying new center sheet designed to straddle the tables, so as to prevent entry of dust.

Center sheet is a flexible stainless sheet having a structure to keep its position and to prevent it from being lifted.

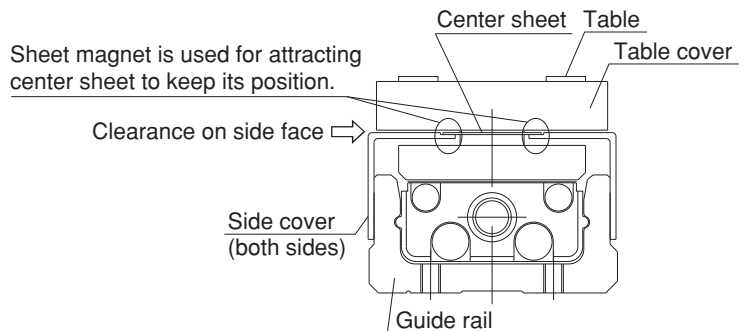

For further improved dust prevention, a wiper can be optionally equipped so that a gap between bottom of table cover and side cover/center sheet is filled.

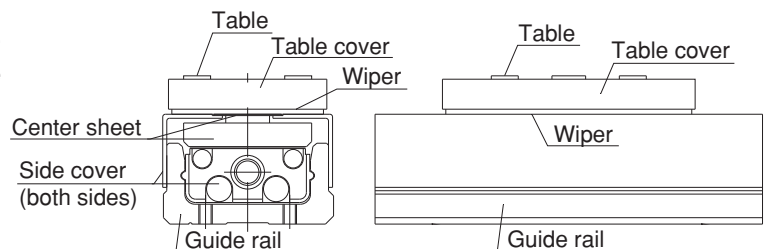

Down-sized body meeting space-saving needs!

SC series has full-cover type body with the same width and dimensions as SE series' guide rail.

Replacing SE series with the full-cover type SC series requires just the same mounting space (width) as SE series (Note that mounting height is different).

Easy maintenance!

In order for more efficient grease-up work, which is usually found cumbersome, a central grease filler hole is provided on the side face of the table, as standard equipment of SC series.

Supplying grease to ball screws and guide parts can be completed at a time through the central grease filler hole. (A plug is equipped with standard spec. model).


Grease nipple to be attached to grease filler hole is available as an option. (For more information, refer to pages 96, 100, and 104.)

Guide with remarkable rigidity!

Having steel U-guide rails similar to SG/SE series, SC series shows high rigidity despite of its compact structure, and it can be applied to a structure supported by one end. (For more information, refer to front matter 11.)

KEY COMPONENTS AND MATERIALS OF SC SERIES

Front matter

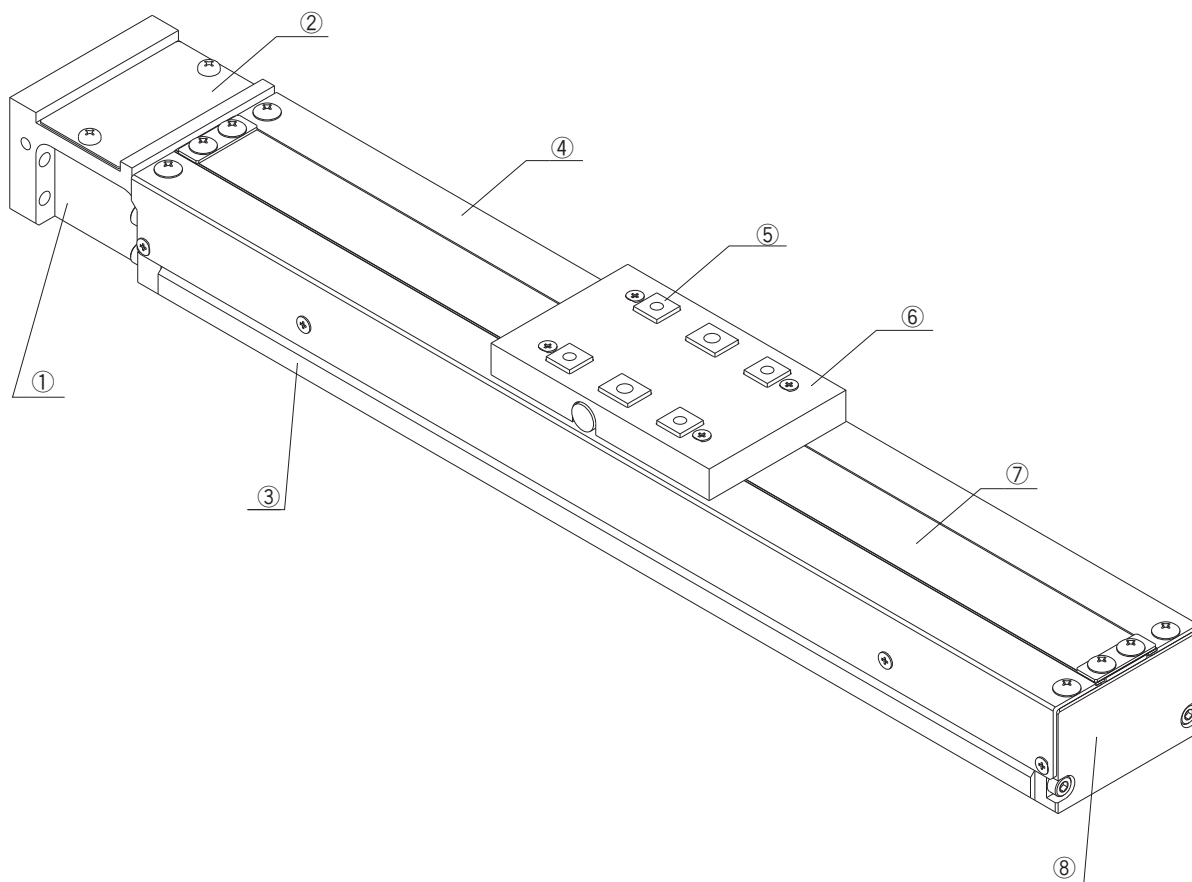

No.	Part name	Material	Remarks
①	Motor bracket	Aluminum alloy	Anodized treatment
②	Coupling cover	Aluminum alloy	Anodized treatment
③	Guide rail	Carbon steel	Black coating
④	Side cover	Aluminum alloy	Anodized treatment
⑤	Table	Aluminum alloy	Anodized treatment
⑥	Table cover	Synthetic resin	
⑦	Center sheet	Stainless steel	
⑧	Housing	Aluminum alloy	Anodized treatment

(Note 1) Ball screws used for SC series have the same specifications as SE series.


(Note 2) Stainless steel is used for bolts and screws to joint components of actuator.

VARIATIONS OF SLIDE BLOCK

Two types of actuator with long block and short block are available. Additional types with either 2 long blocks or 2 short blocks are also available. Appropriate type can be selected from the variations according to your purpose of use.

● With 1 long block: A

Applied to SG, SE, and SC series.

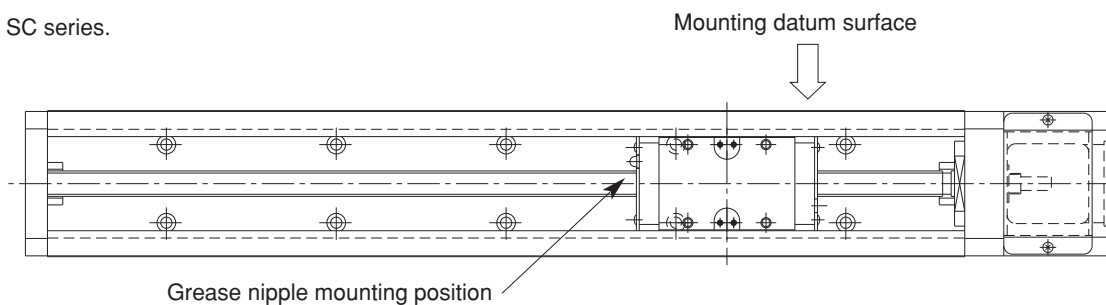


● With 2 long blocks: B

Applied to SG and SE series. (Not available for SC series.)

This configuration may not be applicable depending on guide rail length.

For more information, refer to dimensions of each series.

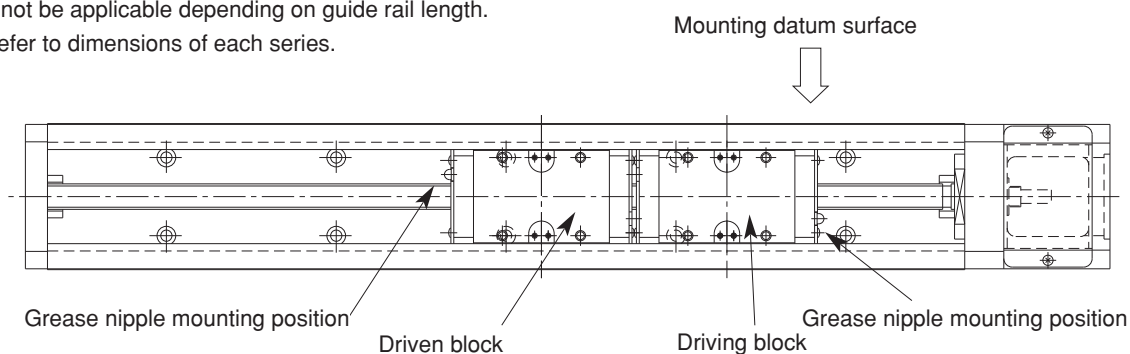


● With 1 short block: C

Applicable size in SE series: SE45

Applicable size in SG series: SG33, SG46

(Not available in SC series.)

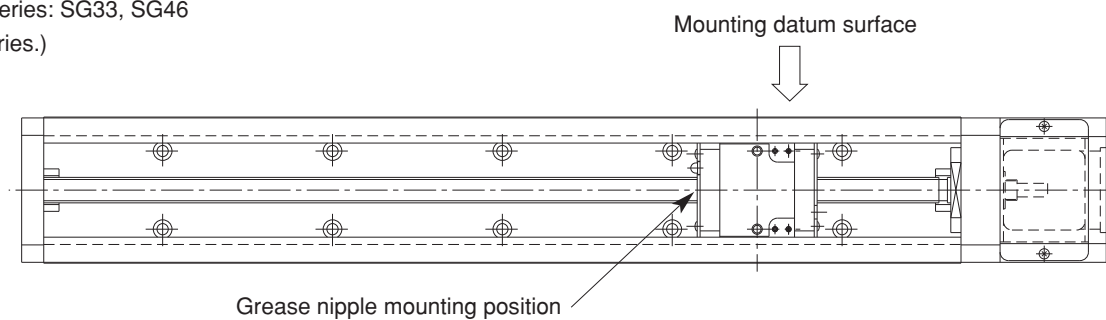


● With 2 short blocks: D

Applicable size in SE series: SE45

Applicable size in SG series: SG33, SG46

(Not available in SC series.)

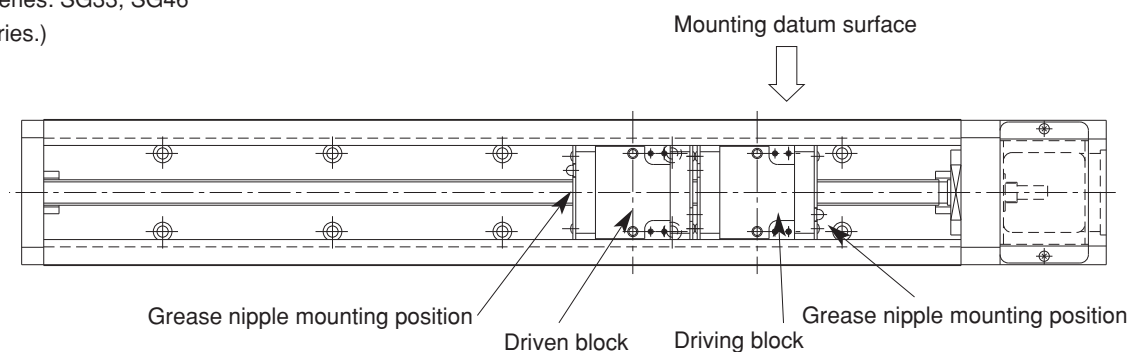

SUMMARY OF ACCURACY INDICATORS

Performance of ballscrew actuators are shown using various accuracy indicators described below.


For details in tolerance of the accuracy indicators, refer to table of performance (accuracy) information for each series.

● Repeated positioning accuracy

Repeat positioning of slide block in the same direction 7 times, measure stop position of slide block and halve maximum difference between obtained readings. Perform this measurement at the center and both ends of travel distance. Maximum value among obtained value is used as measured value.

Repeated positioning accuracy


$$= \pm 1/2 ((\text{maximum value of } \varrho_n) - (\text{minimum value of } \varrho_n))$$

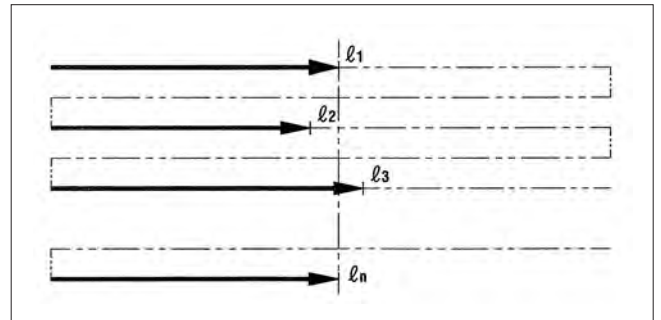

● Positioning accuracy


Position slide block properly in a fixed direction and use the obtained position as datum point. Perform positioning of slide block in the same direction and measure difference between actual travelling distance of slide block from datum point and distance ordered to be traveled from datum point. Perform this measurement throughout stroke range and use maximum value.

$$\text{Positioning accuracy} = (\Delta \varrho_n)_{\text{max}}$$

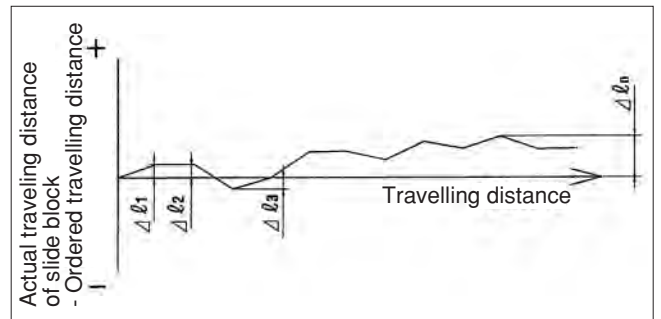

● Traveling parallelism B


Fix indicator at the center of slide block and apply it to surface plate equipped with guide rail. Move slide block throughout traveling distance and use maximum distance among readings of test indicator as measured value.

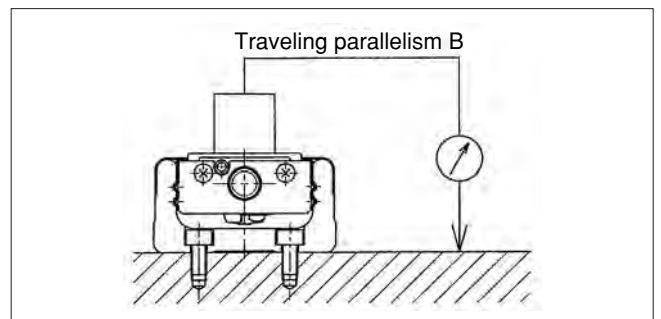

● Backlash

Move slide block by rotating ball screw shaft and read test indicator when slide block is slightly moved and use its reading as reference value. Move slide block from this state in the same direction by pressuring prescribed load and measure difference between reading of test indicator with load removed and reference value. Perform this measurement at the center and both ends of traveling distance and use maximum value as a measured value.

$$\text{Backlash} = \Delta \varrho$$

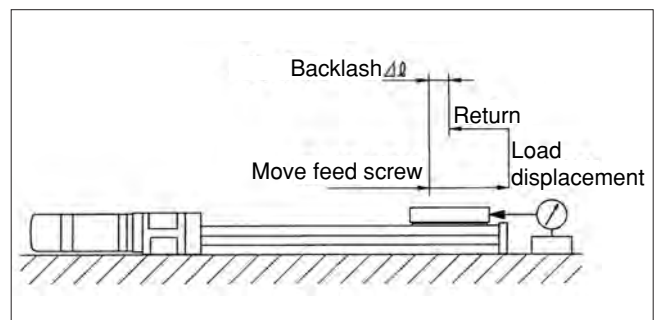

- Firmly tighten the fixed part and connection of the ballscrew actuator.


Improper mounting of the body may adversely affect safety and accuracy depends on the circumstances.

REFERENCE DATA ON ACCURACY

ACCURACY OF UNIT PRODUCT

● Lost Motion


Perform positioning in a positive (or negative) direction and measure the position (Q_1). Move the slide block in the same direction and perform positioning in a negative (or positive) direction and measure the position (Q_1'). Move it further in the same direction and thereafter repeat the procedure in the positive and negative directions seven times each. Obtain the differences of the average values of the stop positions. Conduct this measurement for the entire moving range and use the obtained maximum value as a measured value.

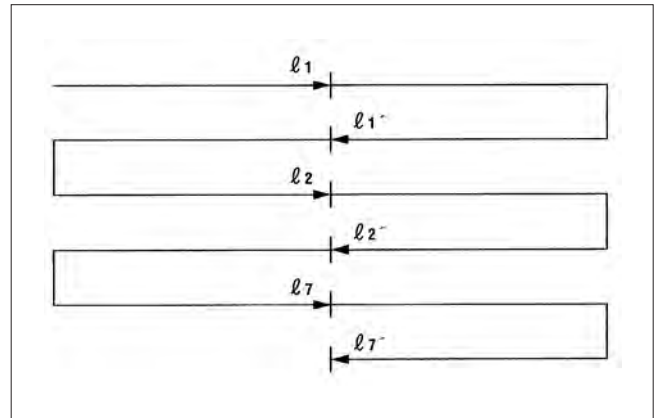

● Traveling Parallelism A


In the case of ballscrew actuators:

Set dial gauge on surface plate, fix indicator on top of slide block, obtain the maximum difference of dial gauge readings in measurable moving range in longitudinal direction of slide block. And use it as a measured value. Since the measurable range is small for ballscrew actuators, Traveling Parallelism B is used as the measurement method for all of the cases except for a few exceptions.

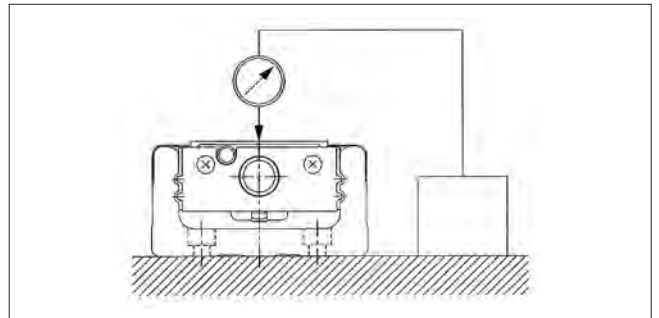

In the case of X-Y stages:

Set dial gauge on surface plate, fix indicator at the center of table, obtain the maximum difference of dial gauge readings in entire moving range in X-Y direction. The maximum difference is used as a measured value.

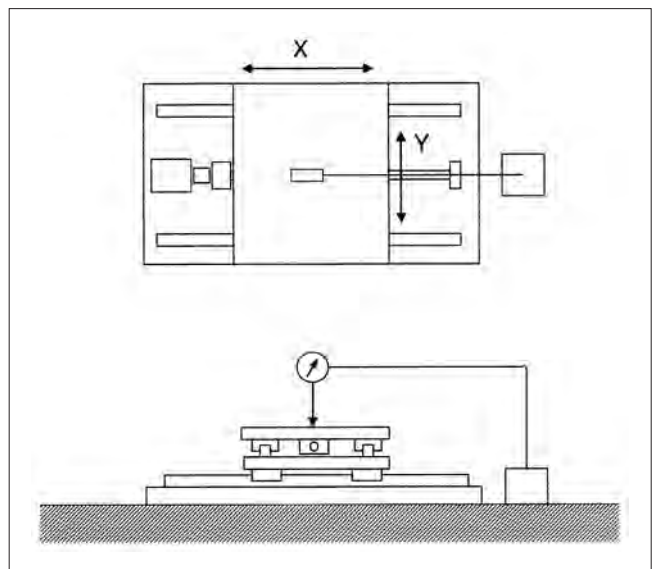

REFERENCE DATA ON ACCURACY


ACCURACY OF UNIT PRODUCT

● Squareness

In case squareness cannot be measured on the table top:

Set a dial gauge on the table top. On surface plate close to the table travel range, fix a square gauge in parallel to X (or Y) travel direction.


Place a fix indicator against the side of square gauge parallel to Y (or X) travel direction. The maximum reading value of the dial gauge in the entire travel range is a measured value of squareness.

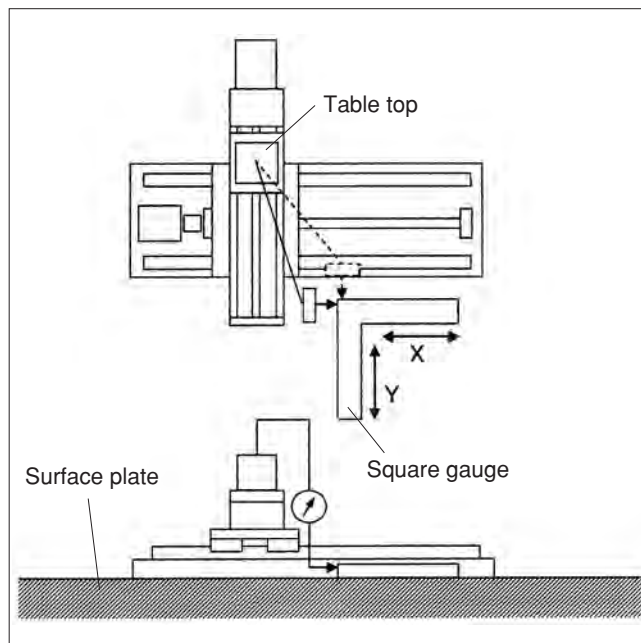

In case squareness can be measured on the table top:


Set a dial gauge on surface plate. On the table top, fix a square gauge in parallel to X (or Y) travel direction.

Place a fix indicator against the side of square gauge parallel to Y (or X) travel direction. The maximum reading value of the dial gauge in the entire travel range is a measured value of squareness.

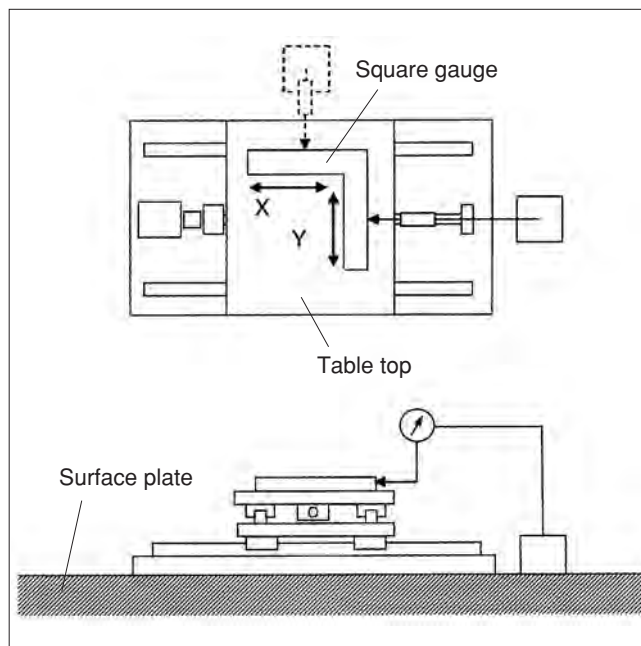


RIGIDITY

Linear motion units of SG, SE, and SC series, having gothic-arched grooves and 4 points-contact structure on guide rails and slide blocks, have attained high rigidity. Displacement by each radial load in each size with long block configuration is shown below as a reference.

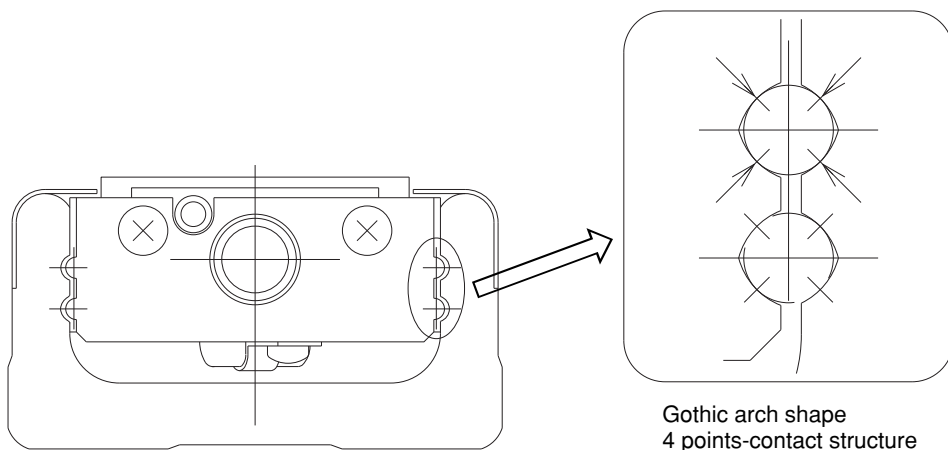


● Displacement of Slide block by Radial Load

SG series

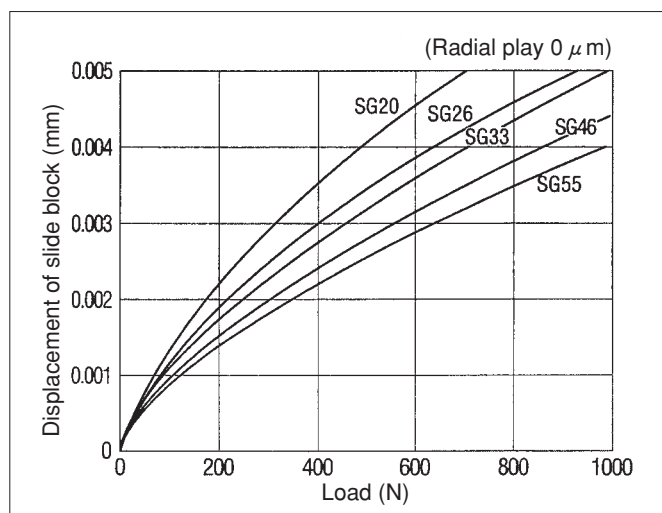


SE/SC series

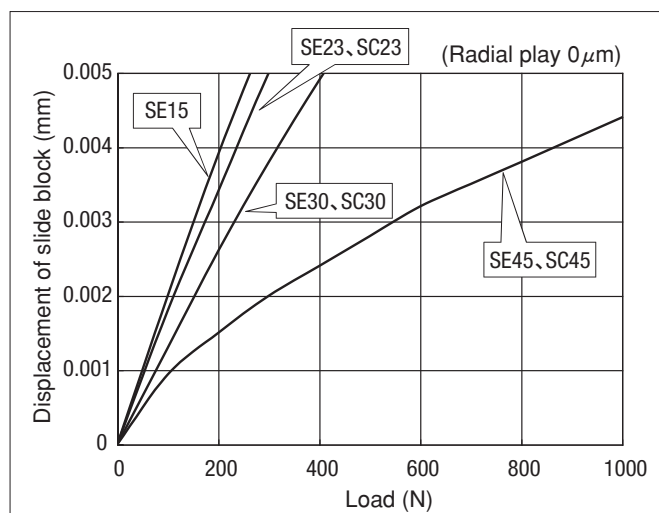

● Sectional Secondary Moment of Guide Rail

The following table shows sectional secondary moments of guide rails in each size.

Model No.	Sectional secondary moments (mm ⁴)		Mass (kg/100mm)
	I _x (X axis)	I _y (Y axis)	
SG20	6.50×10 ³	6.00×10 ⁴	0.250
SG26	1.69×10 ⁴	1.47×10 ⁵	0.380
SG33	5.11×10 ⁴	3.42×10 ⁵	0.600
SG46	2.42×10 ⁵	1.49×10 ⁶	1.240
SG55	2.29×10 ⁵	2.28×10 ⁶	1.500
SE15	2.71×10 ³	2.36×10 ⁴	0.147
SE23, SC23	1.44×10 ⁴	1.37×10 ⁵	0.410
SE30, SC30	3.88×10 ⁴	3.14×10 ⁵	0.560
SE45, SC45	1.45×10 ⁵	1.26×10 ⁶	1.110

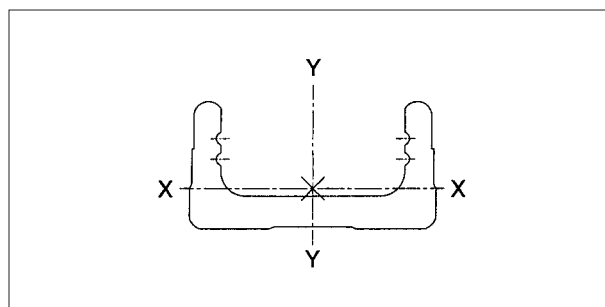

OPTION AND MANUFACTURING BY ORDER

Category	Item		SG series					SE series				SC series		
			SG20	SG26	SG33	SG46	SG55	SE15	SE23	SE30	SE45	SC23	SC30	SC45
Option	Motor bracket configuration	Intermediate flange	○	○	○	○	○	○	○	○	○	○	○	○
		R0/RN type bracket (Note 1)	○	○	○	○	○	—	—	○	○	—	○	○
		Parallel motor mounting unit	—	—	○	○	—	—	—	○	○	—	○	○
	Type of cover	Dustproof cover	○	○	○	○	○	○	○	○	○	—	—	—
		Standard full-cover (Note 2)	—	—	—	—	—	—	—	—	—	○	○	○
		Full-cover with grease nipple (Note 2)	—	—	—	—	—	—	—	—	—	○	○	○
		Full-cover with wiper (Note 2)	—	—	—	—	—	—	—	—	—	○	○	○
	Sensor	Photo-microsensor Ass'y	○	○	○	○	○	—	○	○	○	○	○	○
		Proximity sensor Ass'y	○	○	○	○	○	○	○	○	○	○	○	○
		Sensor rail Ass'y	○	○	○	○	○	○	○	○	○	○	○	○
		Surface treatment (Note 3)	○	○	○	○	○	○	○	○	○	○	○	○
		Dust preventive grease	○	○	○	○	○	○	○	○	○	○	○	○
		Dowel pin hole (slide block)	○	○	○	○	○	—	○	○	○	—	—	—
		Dowel pin hole (guide rail)	○	○	○	○	○	—	○	○	○	○	○	○
	Manufactured by order (Note 8)	Intermediate stroke	●	●	●	●	●	●	●	●	●	●	●	●
Oil hole (Note 4)		●	●	●	●	●	—	●	●	●	—	—	—	
XY bracket		●	●	●	●	●	●	●	●	●	●	●	●	
Motor assembling		●	●	●	●	●	●	●	●	●	●	●	●	
Long rail configuration		●	●	●	●	—	●	●	●	●	●	●	●	
Grease options (Note 5)		●	●	●	●	●	●	●	●	●	●	●	●	
Motor bracket configuration (Note 6)		●	●	●	●	●	●	●	●	●	●	●	●	
Sensor options (Note 7)		●	●	●	●	●	●	●	●	●	●	●	●	

○: Option —: Not available ●: Manufactured by order

- (Note 1) R0 type bracket is applied to SG series and RN type is applied to SE and SC series.
- (Note 2) Full-cover type with wiper and with grease nipple is applied only to SC series.
- (Note 3) Anti corrosive black coating (film thickness 1-2 μm) is provided as surface treatment.
- (Note 4) Oil hole for SG and SE series is applied to the configuration with sub-table.
- (Note 5) Any grease application other than standard or option grease applications will be provided on a manufactured by order basis.
- (Note 6) Ballscrew actuator with motor bracket or intermediate flange configuration other than standard or option configuration will be provided on a manufactured by order basis.
- (Note 7) Ballscrew actuator requiring a sensor other than option configuration or two sensors attached on both ends will be provided on a manufactured by order basis.
- (Note 8) For ballscrew actuators to be provided on a manufactured by order basis, specifications will be determined after consultation with customers. Please consult KURODA after completing the Specification Data Sheet attached at the end of this catalog.

HOW TO INTERPRET MODEL NO.

Model No.	Lead	Slide block	Guide rail length	Performance grade	Motor bracket configuration	Type of cover	Sensor	Surface treatment	Grease	Dowel pin hole
SG33	10	A	500	P	A1	C	C	N	N	PS
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪
Model No. of Main Body					Model No. of Option					

① Model of ballscrew actuator

The 2-digits number represents height of mounting surface, from the bottom face of guide rail to top face of slide block. (For SG/SE series with dustproof cover and SC series, Model No. of the unit used as base of the body is shown.)

SG series	SG20	SG26	SG33	SG46	SG55
SE/SC series	SE15	SE/SC23	SE/SC30	SE/SC45	

② Lead of ball screw

Permissible speed varies depending on the lead. For more information, refer to dimensions of each series.

Lead	SG series					SE/SC series			
	SG20	SG26	SG33	SG46	SG55	SE15	SE/SC23	SE/SC30	SE/SC45
1mm	○					○			
2mm		○				○	○		
4mm								○	
5mm	○	○	○				○	○	○
10mm			○	○				○	○
20mm			○	○	○				○

③ Variation of slide blocks and number of blocks to be mounted

For configuration with 2 slide blocks, a driving block and driven block in combination is mounted. For more information, refer to dimensions of each series.

④ Guide rail length

For more information, refer to dimensions of each series. Please note that the guide rail length is different from overall length or maximum stroke length of actuator.

Model No.	Standard guide rail length										
SE15	100	150	200								
SE23	150	200	250	300							
SE30	150	200	300	400	500	600	700	750			
SE45	340	440	540	640	740	840	940				
SC23	150	200	250	300							
SC30	150	200	300	400	500	600	700	750			
SC45	540	640	740	840	940						
SG20	100	150	200								
SG26	150	200	250	300							
SG33	150	200	300	400	500	600*					
SG46	340	440	540	640	740	840*	940*	1040*	1140*	1240*	
SG55	980	1080	1180	1280*	1380*						

• Asterisk (*) item in the above table applies only to performance grade H.

• For long rail configurations, please consult KURODA.

⑤ Performance of ballscrew actuators, including various positioning accuracy indicators and traveling parallelism

For more information on accuracy, refer to a table of accuracy information for each series.

⑥ Motor bracket configuration

Intermediate flange may be used in combination with basic configuration. For more information, refer to a table of motor bracket configurations and motor option for each series.

⑦ Type of cover

For more information, refer to dimensions of each series.

⑧ With or without sensor / type of sensor

For more information, refer to dimensions of each series.

⑨ With or without surface treatment applied on guide rails and ball screws

With standard specifications (Symbol N), only guide rails are treated with black coating (except for guide rails made from stainless steel).

⑩ Type of grease applied on slide blocks and ball screws of ballscrew actuators

With standard specifications, Multemp PS No.2 Grease (KYODO YUSHI CO., LTD.) is contained.

⑪ Dowel pin holes on guide rails and slide blocks




The column will be left blank (no symbol) if actuator is without dowel pin holes. For more information, refer to configuration drawings for each series.




FOR SAFETY USE

Be sure to read the following instructions before use.
For common instructions, refer to the text of this catalog.

The following safety precautions recommend the correct usage of our products to prevent an injury and a damage. These precautions are classified into 3 categories : "DANGER", "WARNING" and "CAUTION" according to the degree of possible injury or damage and the degree of impendence of such injury or damage.
Be sure to follow all these precautions, as they include important contents regarding safety.

 DANGER	 WARNING	 CAUTION
Indicates an impending hazardous situation that may arise due to improper handling or operation and could result in a serious injury or death.	Indicates a potentially hazardous situation that may arise due to improper handling or operation and could result in a serious injury or death.	Indicates a potentially hazardous situation that may arise due to improper handling or operation and could result in an injury or property damage only.

Be sure to obey "Labor Safety and Sanitation Law" and other safety rules and regulations in addition to these precautions. There is some situation that may lead to a serious result according to circumstances, even if it is mentioned in the category of "CAUTION". Be sure to follow these precautions, as they contain important matters.

 WARNING
<ul style="list-style-type: none"> • Select a ballscrew actuator properly. As operating conditions for products mentioned in this catalog are diversified, the applicability of ballscrew actuator to the intended system should be determined by the total system designer or the person who determined specifications for such system after conducting an analysis and testing as necessary. The person who determined the applicability of the system shall be responsible for assuring the intended system performance and safety. When configuring a system, the system designer should thoroughly examine all specifications for such a system by referring to the latest product catalog and data, and also take into consideration the possibility of equipment troubles. • The ballscrew actuator should be handled by persons who have sufficient knowledge and rich experience. Thoroughly read this catalog and operation manual before use. <ul style="list-style-type: none"> · Never disassemble the ballscrew actuator. Dust can enter the inside, degrading the accuracy of the module and causing an accident. When the ballscrew actuator has been disassembled from necessity, return it to our company for repair and reassembling. (In this case, repairing charges are required.) · When mounting a ballscrew actuator to a machine and dismantling it from machine, check that a fall prevention means has been taken and the moving part of the machine has been fixed beforehand. • When using the ballscrew actuator in the following conditions or environments, take the proper safety measures and consult KURODA beforehand. <ul style="list-style-type: none"> · Conditions and environments other than specified and outdoor use. · Applications to nuclear power equipment, railroads aircraft, vehicles, medical equipment, equipment connected with food and drink, and the likes. · Applications which require extreme safety and will also greatly affect men and property. • During operation, make sure to keep your hands away from either of stroke ends, where slide block moves, to prevent your finger from being caught. • During operation, make sure to keep your hands away from screws and axis terminals of ball screw shaft, which are rotating parts, to prevent your hands from being caught. • Pay adequate attention not to allow the actuators to be used for military purpose including for arms and weapons.



BALLSCREW ACTUATOR/COMMON INSTRUCTIONS

Be sure to read the following instructions before use.
Also refer to "FOR SAFETY USE".

DESIGN

WARNING

- Especially when there is the possibility that the ballscrew actuator is dangerous to the human body, provide it with a protective cover.

When there is the possibility that the load and the moving part of the ballscrew actuator are dangerous to the human body, design the structure to prevent the human body from touching such load and moving part directly.

- Firmly tighten the fixed part and connection of the ballscrew actuator. Improper mounting of the body may adversely affect safety and accuracy according to circumstances.
- Take into consideration the behavior of the ballscrew actuator in an emergency.

When the machine is immediately stopped in an emergency by a person or by a safety device in case of power failure or system trouble, the motion of the module can injure the human body and can damage the machine. So design the machine to prevent an injury to the human body and a damage to the machine.

SELECTION

WARNING

- Check specifications.
Be sure to use the ballscrew actuator within the given specifications.
- When selecting a rigid type as coupling for connecting a motor, consult KURODA.

MOUNTING

CAUTION

- Be careful not to dent and flow the body and the mounting surface of the table, side cover, and center sheet.

Such dent or flaw will degrade parallelism of mounting surface, resulting in rattling of the guide and increased slide resistance. Note that, since the center sheet of SC series are very thin, such dent or flaw may ruin its dust preventive capability or lead to damage of the sheet function.

- When connecting the ballscrew actuator to a load with an external support or guide, do so in accordance with a proper connecting method and perform centering satisfactorily.
- When mounting a load, do not apply an excessive shock or moment.

If the ballscrew actuator receives external force exceeding the permissible moment, the guide will loosen and sliding resistance will increase.

- Do not start the system until it is confirmed that the ballscrew actuator works properly.

After mounting the ballscrew actuator, perform an appropriate functional test and make sure that it is correctly mounted and works safely without fail before starting the system.

- Although corners of components, such as motor bracket, housing, side cover, and center sheet, are beveled, pay enough attention not to hurt yourself when handling them.

OPERATING ENVIRONMENT

DANGER

- Do not use the ballscrew actuator in a place where an explosive atmosphere exists.

WARNING

- Do not use the ballscrew actuator in an atmosphere containing corrosive gases, chemicals, seawater, water and vapor and in a place where it can be stained with such matters.
- When using the ballscrew actuator in a place where it is exposed to dust, cuttings, spatters, etc., fit a protective cover or other protector.
- Do not use the ballscrew actuator in a vibratory or shockable place ; otherwise causing a bad condition or breakdown.

When using the ballscrew actuator in such an environment, consult KURODA.

CAUTION

- Since the SC series is equipped with sheet magnet on side covers for attracting center sheet to keep its position, be careful not to have the magnet contaminated with iron power or metallic fragments.

LUBRICANTS

CAUTION

- Unless otherwise specified, the nut contains Multemp PS No.2 Grease (KYODO YUSHI CO., LTD.) as a lubricant.

- Checking and supplying lubricant

Check the lubricant 2 to 3 months after the ball screw is used for the first time. If it is extremely dirty, wipe off old grease and apply new grease. Then, check and supply the lubricant once every year as a general rule. However, as the service life of lubricants varies according to operating conditions and environment, adjust the intervals properly.

When feeding additional grease (lubricant), use the same brand of grease as initially contained.

With SC series, a central grease filler hole (M3) is provided on side surface of table, making it possible for the grease to be supplied to ball screw and guide through the filler hole.

Supply additional grease as necessary, preferably with the interval indicated above. When adding grease, 2 dispenses by grease gun (approx. 1 to 2 cc) should be supplied.

After supplying additional grease, operate the table to the extent of full stroke to apply the grease over the component. Wipe off excess grease attached around the central grease filler hole.

- Do not use at high temperature over 60 celsius degree.

As resin is used in ballscrew actuator, use at lower temperature than 60 celsius degree. For ballscrew actuator with sensor, use at lower temperature than 55 celsius degree.

VARIATIONS

Model No.	SC23	SC30	SC45
Performance grade	U: Repeated positioning accuracy $\pm 5\mu\text{m}^*$ W: Repeated positioning accuracy $\pm 10\mu\text{m}^*$		
Screw shaft dia. (mm)	8	10	15
Lead (mm)	2	●	
	4	●	○
	5	○	○
	8	●	
	10		○
	20		●



○: In-stock items ●: Manufactured by order

(Note 1) Asterisked (*) items may be different from the values shown above, depending on applied options and usage.

HOW TO INTERPRET MODEL NO.

SE30	05	A	-	150	U	-	A1	N	N	-	N	N	-	PR
①	②	③		④	⑤		⑥	⑦	⑧		⑨	⑩		⑪

① Model ② Lead

① Model	② Lead
SC23	2, 5
SC30	4, 5, 10
SC45	5, 10, 20

③ Slide block

Model	Slide block
SC23	
SC30	A: With 1 long block
SC45	

④ Guide rail length (Note 1)

Model	Guide rail length (mm)
SC23	150, 200, 250, 300
SC30	150, 200, 300, 400, 500, 600, 700, 750
SC45	540, 640, 740, 840, 940

⑤ Performance grade

U	Repeated positioning accuracy $\pm 5\mu\text{m}$
W	Repeated positioning accuracy $\pm 10\mu\text{m}$

⑥ Motor bracket configuration

Model	Motor bracket configuration
SC23	A0, A1, A2, A3, A5, A6, A7
SC30	A0, A1, A2, A3, A4, A5, A7, B1, RN, E□, F□
SC45	A0, A1, A2, A3, A4, A5, A6, RN, E□, F□, G□

⑦ Type of cover

N	Standard cover
G	With grease nipple
S	With wiper
D	With grease nipple and wiper

⑧ Sensor

Model	Sensor
SC23	N: Without sensor
	S: Photo-microsensor
	K, E: Proximity sensor
	1: For sensor rails only
SC30	N: Without sensor
	M, Y, C, P: Photo-microsensor
	K, E: Proximity sensor
SC45	K, E: Proximity sensor
	1: For sensor rails only

⑨ Surface treatment (Note 2)

N	Standard treatment
L	Anti corrosive black coating

⑩ Grease (Note 3)

Model	Grease
SC23	N: Standard grease
SC30	S: Dust preventive
SC45	KURODA S grease

⑪ Dowel pin hole

Blank	No dowel pin hole
PR	For guide rail only

(Note 1) For specifications of guide rail with long rails or intermediate stroke with non-standard length, consult KURODA.

(Note 2) With standard specifications of surface treatment (Symbol: N), only guide rails are treated with black coating.

(Note 3) With standard grease (Symbol: N), Multemp PS No.2 Grease (KYODO YUSHI CO., LTD.) is contained in slide block and ball screw components.


(Note 4) With Lubrication unit LUBSEAL specifications refer page from 118 to 119.

SPECIFICATIONS

Model no.			SC2302		SC2305		SC3004		SC3005		SC3010		SC4505		SC4510		SC4520	
Performance grade			W	U	W	U	W	U	W	U	W	U	W	U	W	U	W	U
Guide	Radial clearance		μm	-3~0				-3~0				-5~0						
	Long block	Basic dynamic load rating	C	4.3				7				27						
		Basic static load rating	C ₀	7.0				11.8				45.0						
		Static permissible moment	M _P	N·m	29				43				68					
			M _Y		51				107				194					
M _R	61				84				250									
Ball screw	Shaft diameter		mm	8				10				15						
	Lead		mm	2	5	4	5	10	5	10	20							
	Basic dynamic load rating	C _a	kN	1.8	1.9	3.0	3.0	2.0	5.1	5.1	3.1							
	Basic static load rating	C _{0a}	kN	3.2	3.1	5.3	5.3	3.2	10.5	10.5	6.6							
Fixed side bearing	Model No. of bearing			AC6-16DF or equivalent				708DFP5 or equivalent				5201A or equivalent						
	Basic dynamic load rating	C _b	kN	1.79				4.40				5.90						
	Basic static load rating	C _{0b}	kN	1.76				4.36				3.20						

(Note 1) Static permissible moment shows rigidity value based on dimensions and material of table.

DIRECTION OF MOMENT

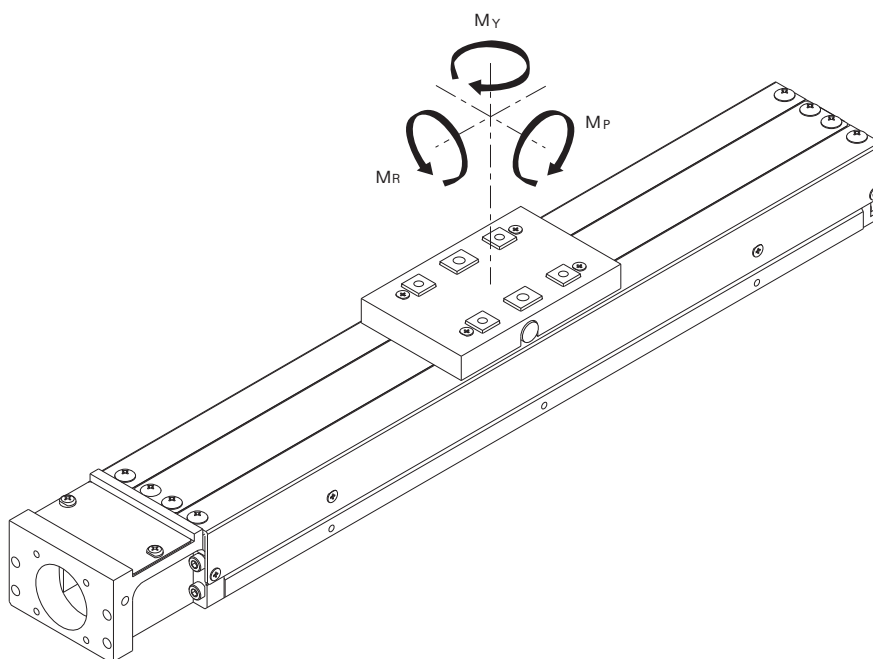

ACCURACY

Model No.	Guide rail length (mm)	Repeated positioning accuracy (μm)		Positioning accuracy (μm)		Travelling parallelism B (μm)		Backlash (μm)		Starting torque ($\text{N}\cdot\text{m}$)	
		W	U	W	U	W	U	W	U	W	U
SC23	150	± 10	± 5	70		15		20	5	0.03	0.06
	200			75							
	250			85							
	300			90							
SC30	150	± 10	± 5	70		15		20	5	0.07	0.15
	200			80							
	300			90							
	400			95							
	500			100		25		20	5	0.07	0.15
	600			110							
	700			120							
	750			130							
SC45	540	± 10	± 5	110		40		20	5	0.1	0.2
	640			120							
	740			130							
	840			150		50		20	5	0.1	0.2
	940			170							

(Note 1) Measurement is to be performed with KURODA's specified motor mounted.

(Note 2) Above starting torque value is applied when the standard grease is used. The value may change depending on the properties of the grease.

INERTIA

Inertia for slide block and ball screw of ballscrew actuator is shown in the following table.


(Unit: $\times 10^{-5} \text{kg} \cdot \text{m}^2$)

Model No.	Guide rail length (mm)	Full-cover type
		Long block A: 1 block
SC2302	150	0.0616
	200	0.0773
	250	0.0930
	300	0.1090
SC2305	150	0.0756
	200	0.0913
	250	0.1070
	300	0.1230
SC3004	150	0.165
	200	0.204
	300	0.280
	400	0.357
	500	0.434
	600	0.510
	700	0.587
SC3005	150	0.176
	200	0.214
	300	0.291
	400	0.367
	500	0.444
	600	0.521
	700	0.597
SC3010	150	0.261
	200	0.299
	300	0.376
	400	0.453
	500	0.529
	600	0.606
	700	0.683
	750	0.721
SC4505	540	2.43
	640	2.81
	740	3.20
	840	3.59
	940	3.98
SC4510	540	2.68
	640	3.07
	740	3.46
	840	3.84
	940	4.23
SC4520	540	3.69
	640	4.08
	740	4.47
	840	4.86
	940	5.24

Model No.

Model No.	Lead	Slide block	Guide rail length	Performance grade
SC23	**	*	***	*
	02: 2mm 05: 5mm	A: With 1 long block	150, 200, 250, 300	W, U

● FULL-COVER TYPE LONG BLOCK CONFIGURATIONS

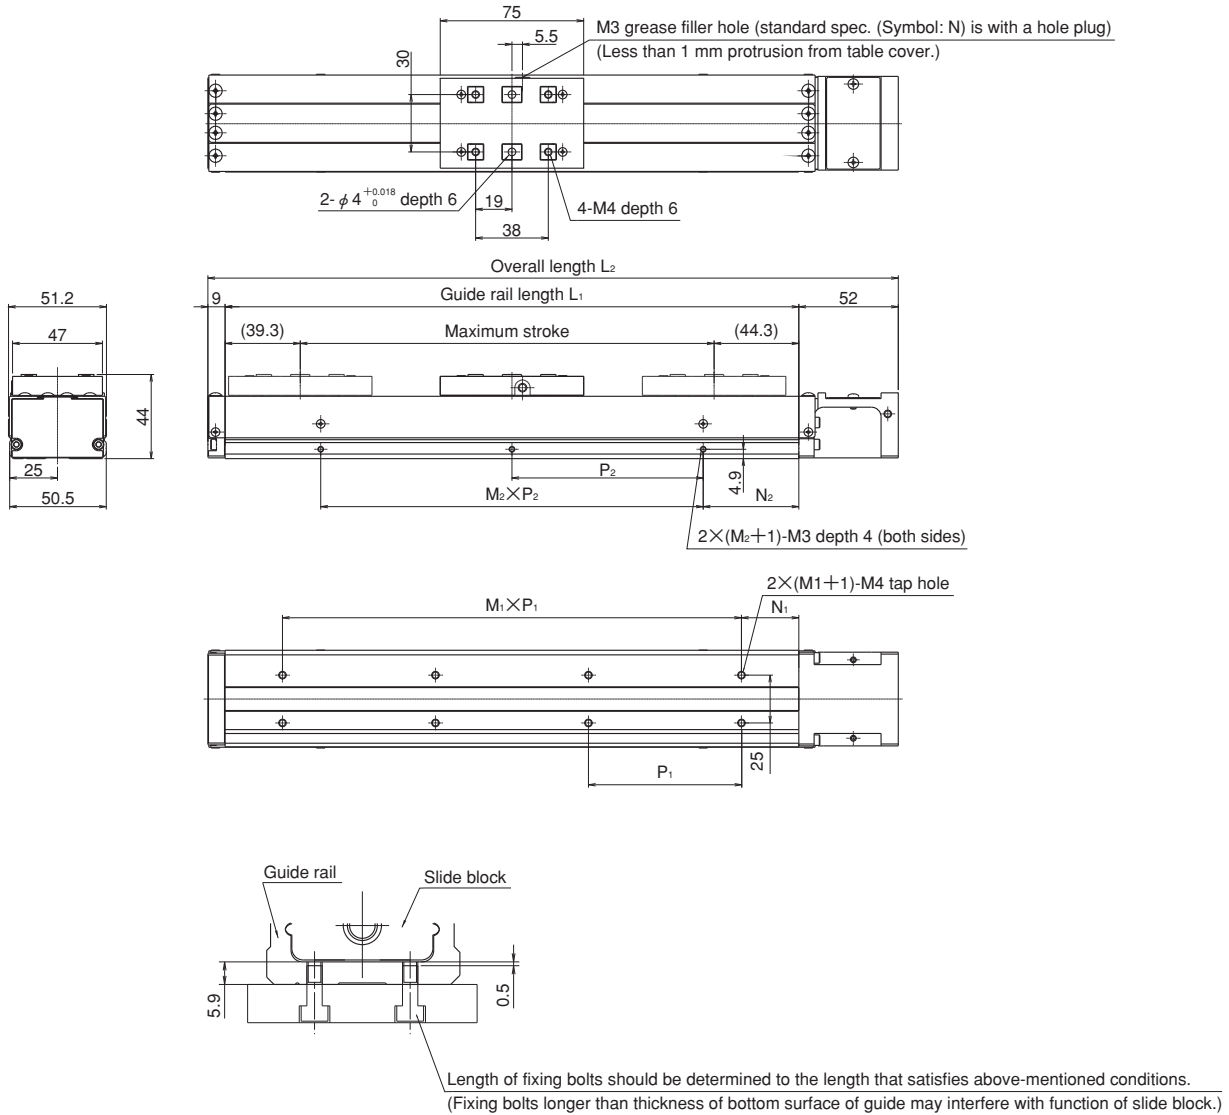

Motor bracket configuration	Type of cover	Sensor
**	*	*
A0, A1, A2, A3, A5, A6, A7	N: Standard cover G: With grease nipple S: With wiper D: With grease nipple and wiper	N: Without sensor S: Photo-microsensor K, E: Proximity sensor 1: For sensor rails only

Surface treatment	Grease
*	*
N: Standard treatment L: Anti corrosive black coating	N: Standard grease S: Dust preventive grease

Dowel pin hole
**
No symbol: No dowel pin hole PR: For guide rail only

● FULL-COVER TYPE LONG BLOCK DIMENSIONS

(Unit: mm)

Guide rail length L_1	Overall length L_2	N_1	$M_1 \times P_1$	N_2	$M_2 \times P_2$	Maximum stroke
						Long block
						A: 1 block
150	211	35	1×80	25	1×100	66
200	261	20	2×80	50		116
250	311	45		3×80	25	2×100
300	361	30	50		216	

● PERMISSIBLE SPEED / MASS

Guide rail length L_1 (mm)	Permissible speed (mm/s)		Mass (kg)	
	Lead		Full-cover type	Mass of table (slide block + table + table cover parts)
	2mm	5mm	A: With 1 long block	
150	200	490	1.20	0.25
200			1.41	
250			1.63	
300			1.84	

(Note 1) Mass of full-cover type actuators in the above table includes mass of table.

(Note 2) For long rail configurations, please consult KURODA.

● DOWEL PIN HOLE (Guide rail only)

Please refer to P69 of SE23 series regarding to guide rail positioning hole.


Model No.

Model No.	Lead	Slide block	Guide rail length	Performance grade
SC23	**	*	***	*
	02: 2mm 05: 5mm	A: With 1 long block	150, 200, 250, 300	W, U


● COVER CONFIGURATION

The below-mentioned configurations with grease nipple and/or wiper are available for full-covered series. Standard specification (Symbol: N) has a plug equipped with grease filler hole.


Full-cover type with grease nipple (Symbol: G)

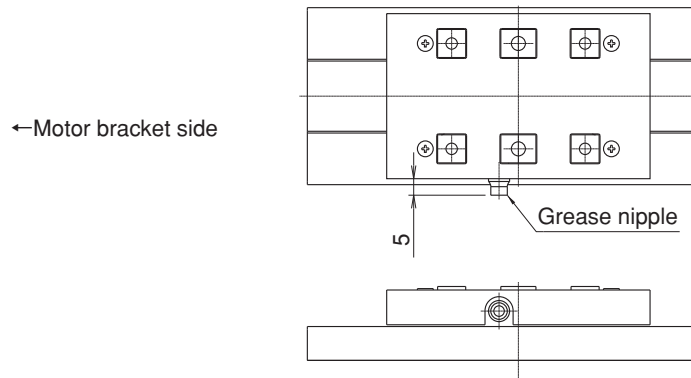

Full-cover type with wiper (Symbol: S)

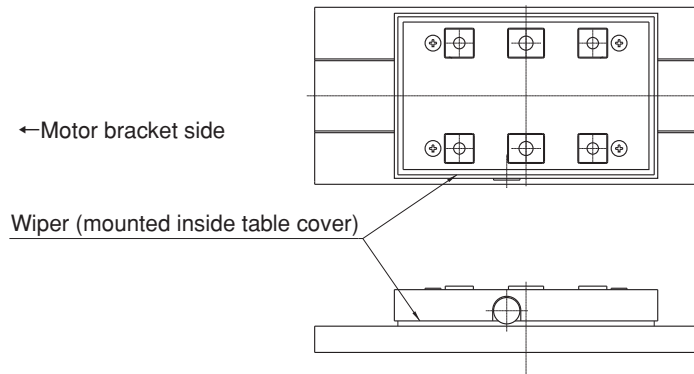

Full-cover type with grease nipple and wiper (Symbol: D)

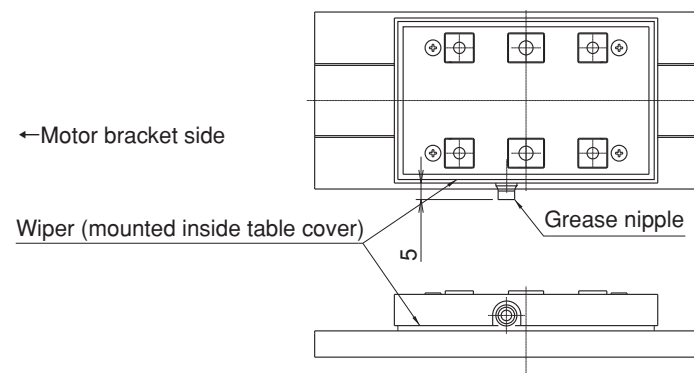


Motor bracket configuration	Type of cover	Sensor
**	*	*
A0, A1, A2, A3, A5, A6, A7	N: Standard cover G: With grease nipple S: With wiper D: With grease nipple and wiper	N: Without sensor S: Photo-microsensor K, E: Proximity sensor 1: For sensor rails only

Surface treatment	Grease
*	*
N: Standard treatment L: Anti corrosive black coating	N: Standard grease S: Dust preventive grease


Dowel pin hole
**
No symbol: No dowel pin hole PR: For guide rail only

● SENSOR

Symbol S (NPN): Photo-microsensor (Panasonic Industrial Devices SUNX)

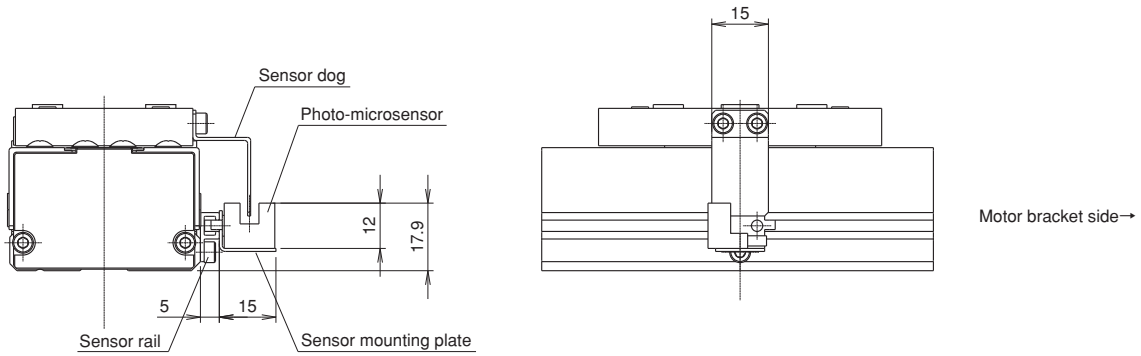


Symbol K (NPN) / E (PNP): Proximity sensor (Azbil)

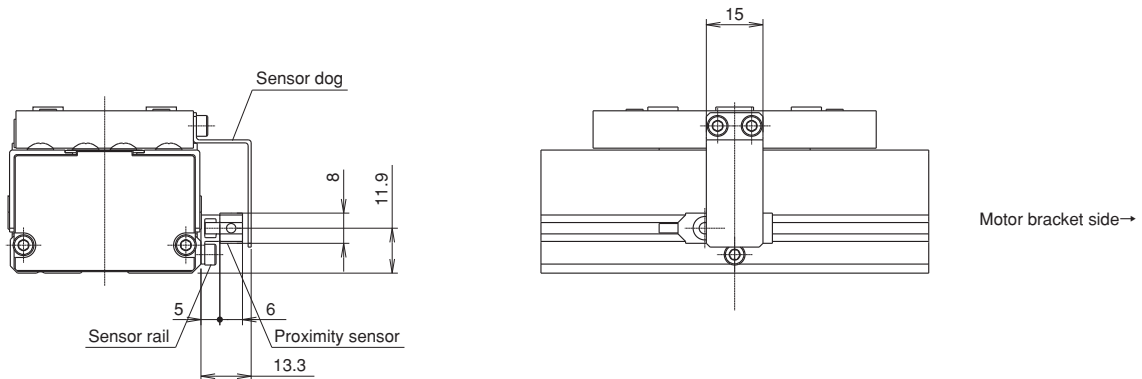

● SENSOR RAIL

Sensor rails only available with no sensors.


Sensor rail No. 1

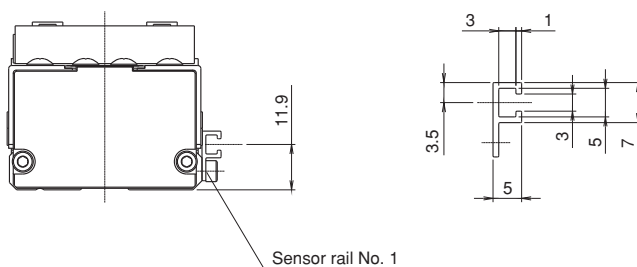

Model No.

Model No.	Lead	Slide block	Guide rail length	Performance grade
SC30	**	*	***	*
	04: 4mm 05: 5mm 10: 10mm	A: With 1 long block	150, 200, 300, 400, 500, 600, 700, 750	W, U

● FULL-COVER TYPE LONG BLOCK CONFIGURATIONS

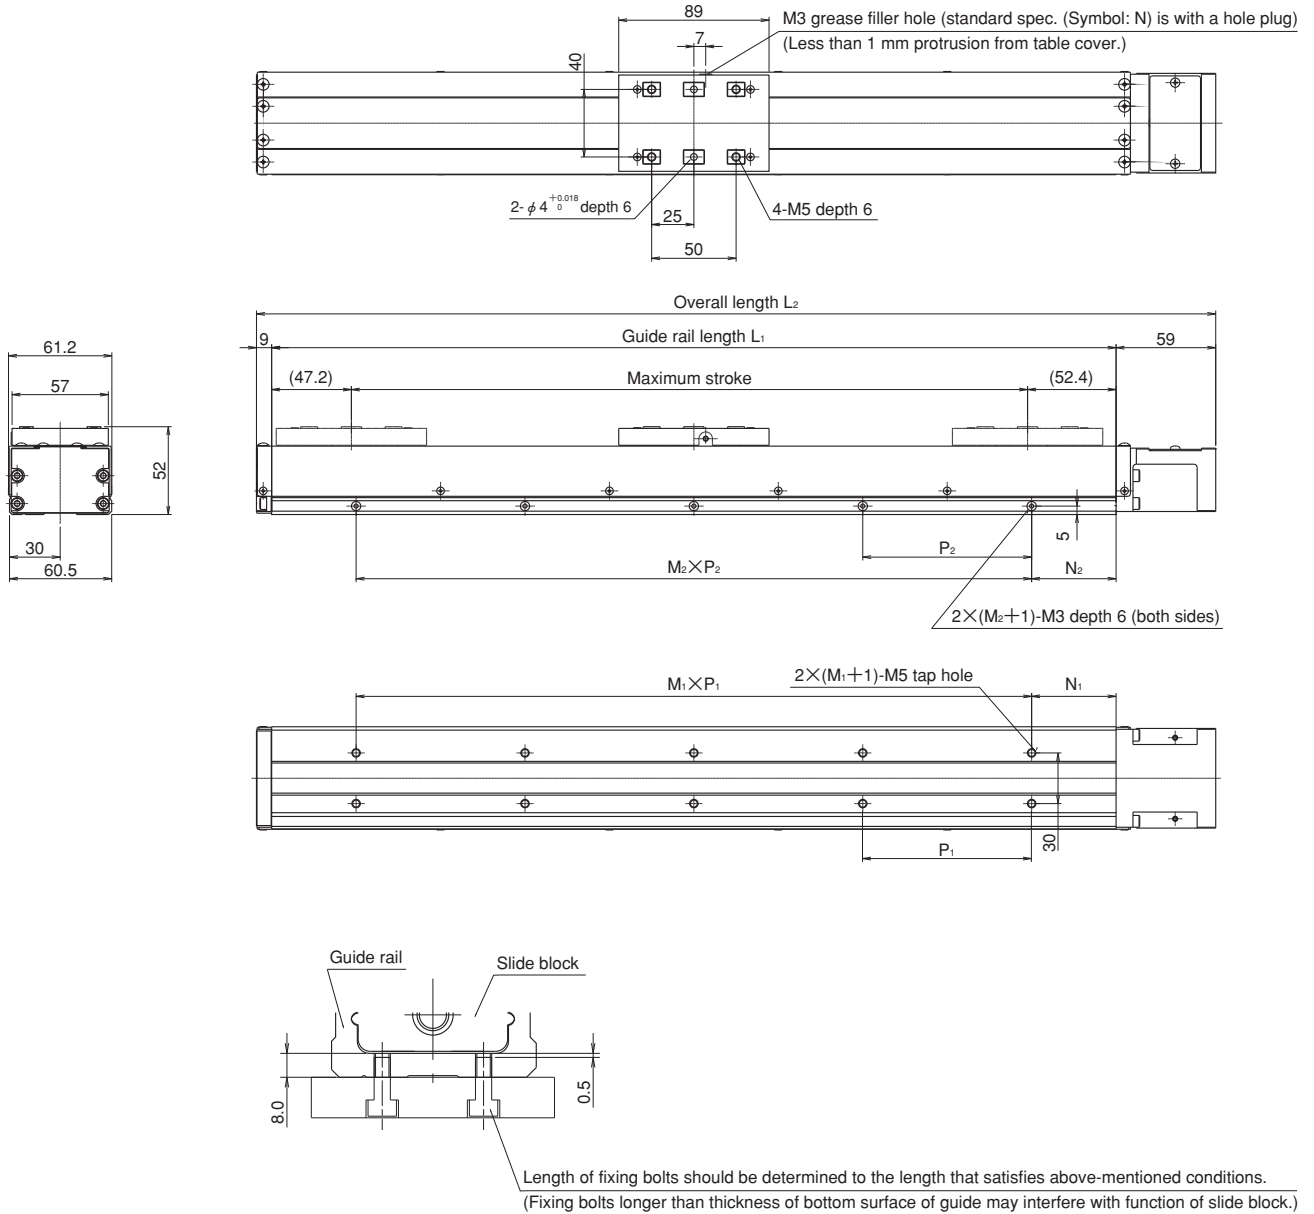

Motor bracket configuration	Type of cover	Sensor
**	*	*
A0, A1, A2, A3, A4, A5, A7, B1, RN, E□, F□	N: Standard cover G: With grease nipple S: With wiper D: With grease nipple and wiper	N: Without sensor M, Y, C, P: Photo-microsensor K, E: Proximity sensor 1: For sensor rails only

Surface treatment	Grease
*	*
N: Standard treatment L: Anti corrosive black coating	N: Standard grease S: Dust preventive grease

Dowel pin hole
**
No symbol: No dowel pin hole PR: For guide rail only

● FULL-COVER TYPE LONG BLOCK DIMENSIONS

(Unit: mm)

Guide rail length L_1	Overall length L_2	N_1	$M_1 \times P_1$	N_2	$M_2 \times P_2$	Maximum stroke					
						Long block					
						A: 1 block					
150	218	25	1×100	25	1×100	50					
200	268	50				50	2×100	100			
300	368		3×100	3×100	3×100			200			
400	468							4×100	4×100	4×100	300
500	568										5×100
600	668		6×100	6×100	6×100			500			
700	768	7×100				7×100	7×100	600			
750	818		25	7×100	25			7×100	650		

● PERMISSIBLE SPEED / MASS

Guide rail length L_1 (mm)	Permissible speed (mm/s)			Mass (kg)	
	Lead			Full-cover type	Mass of table (slide block + table + table cover parts)
	4mm	5mm	10mm	A: With 1 long block	
150	320	400	810	1.9	0.43
200				2.2	
300				2.9	
400				3.5	
500				4.2	
600	240	300	600	4.9	
700	170	210	430	5.5	
750	—	—	380	5.8	

(Note 1) Guide rail length of 750 mm is available only for SE3010.

(Note 2) Mass of full-cover type actuators in the above table includes mass of table.

(Note 3) For long rail configurations, please consult KURODA.

● DOWEL PIN HOLE (Guide rail only)

Please refer to P77 of SE30 series regarding to guide rail positioning hole.


Model No.

Model No.	Lead	Slide block	Guide rail length	Performance grade
SC30	**	*	** *	*
	04: 4mm 05: 5mm 10: 10mm	A: With 1 long block	150, 200, 300, 400, 500, 600, 700, 750	W, U


● COVER CONFIGURATION

The below-mentioned configurations with grease nipple and/or wiper are available for full-covered series. Standard specification (Symbol: N) has a plug equipped with grease filler hole.


Full-cover type with grease nipple (Symbol: G)

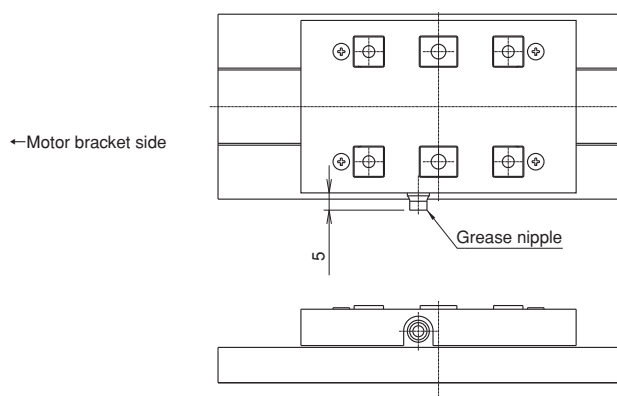

Full-cover type with wiper (Symbol: S)

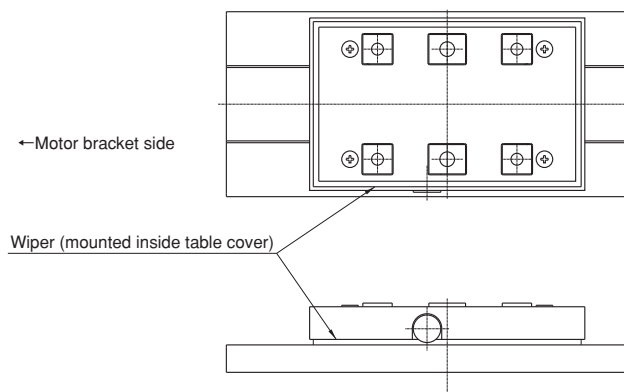

Full-cover type with grease nipple and wiper (Symbol: D)

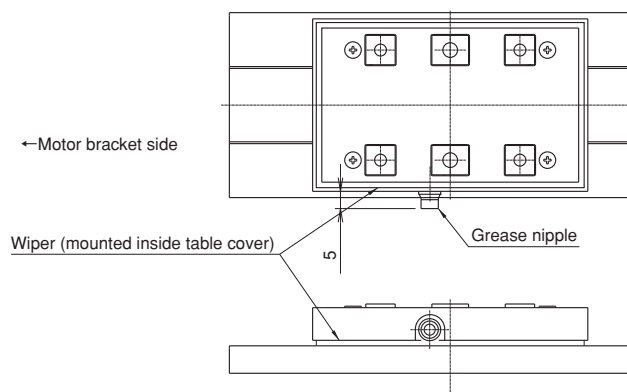


Motor bracket configuration	Type of cover	Sensor
**	*	*
A0, A1, A2, A3, A4, A5, A7, B1, RN, E□, F□	N: Standard cover G: With grease nipple S: With wiper D: With grease nipple and wiper	N: Without sensor M, Y, C, P: Photo-microsensor K, E: Proximity sensor 1: For sensor rails only

Surface treatment	Grease
*	*
N: Standard treatment L: Anti corrosive black coating	N: Standard grease S: Dust preventive grease


Dowel pin hole
**
No symbol: No dowel pin hole PR: For guide rail only

● SENSOR

Symbol C (NPN) / P (PNP), M (NPN) / Y (PNP): Photo-microsensor (OMRON, Panasonic Industrial Devices SUNX)

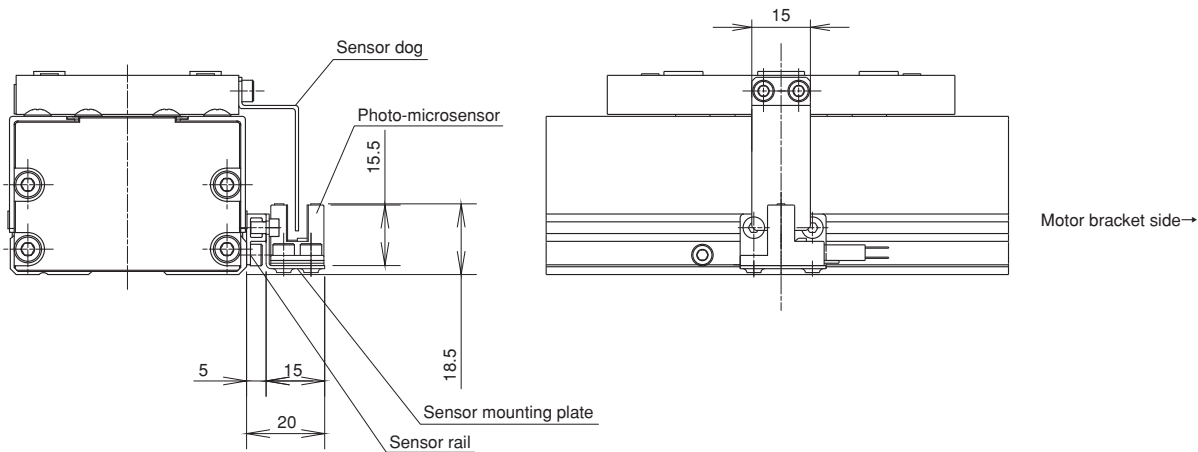


Symbol K (NPN) / E (PNP): Proximity sensor (Azbil)

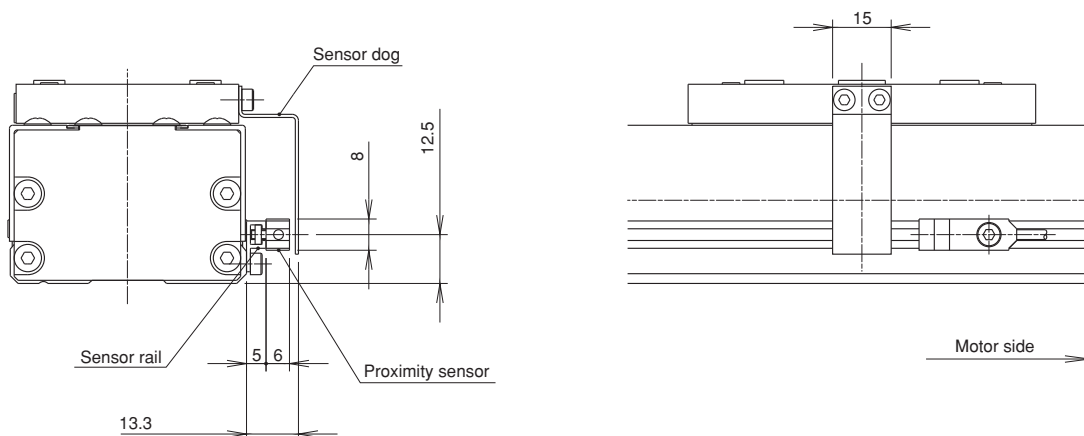

● SENSOR RAIL

Sensor rails only available with no sensors.





Sensor rail No. 1

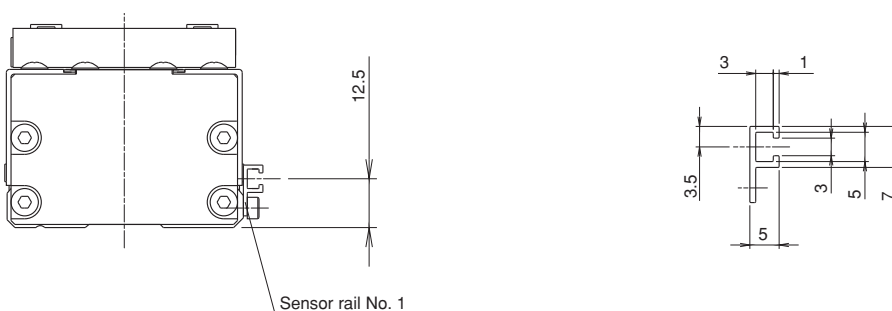

Model No.

Model No.	Lead	Slide block	Guide rail length	Performance grade
	SC45	** 05: 5mm 10: 10mm 20: 20mm	* A: With 1 long block	*** 540, 640, 740, 840, 940

● FULL-COVER TYPE LONG BLOCK CONFIGURATIONS

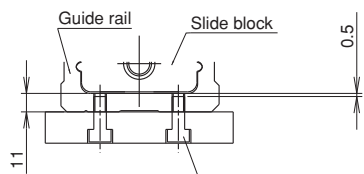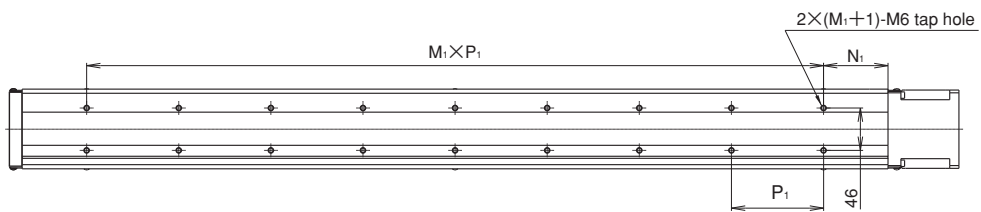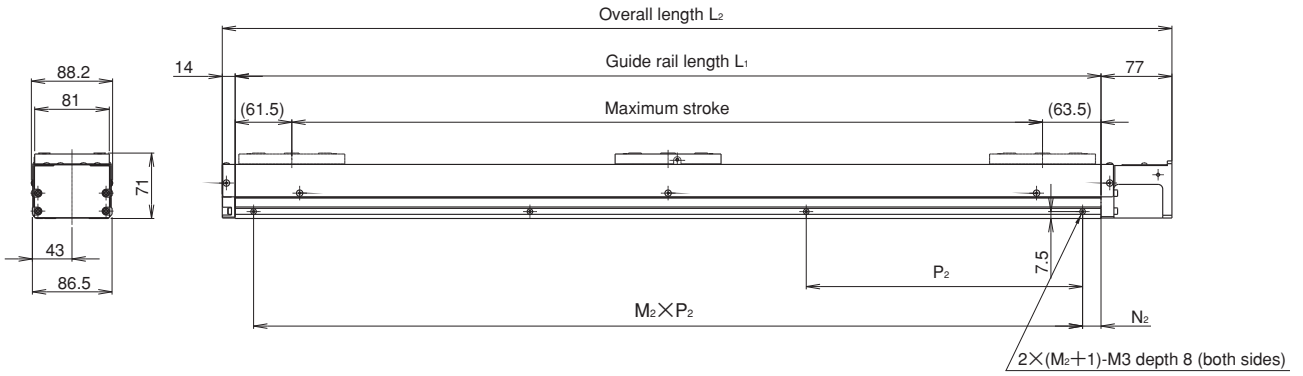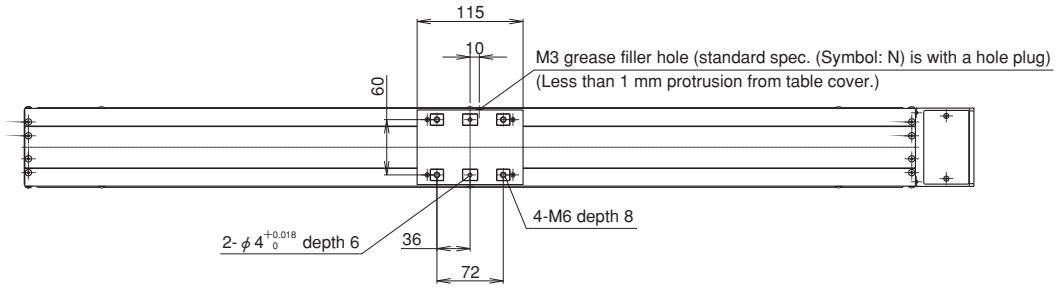

Length of fixing bolts should be determined to the length that satisfies above-mentioned conditions.
(Fixing bolts longer than thickness of bottom surface of guide may interfere with function of slide block.)

SC series

Motor bracket configuration	Type of cover	Sensor	Surface treatment	Grease	Dowel pin hole
**	*	*	*	*	**
A0, A1, A2, A3, A4, A5, A6, RN, E□, F□, G□	N: Standard cover G: With grease nipple S: With wiper D: With grease nipple and wiper	N: Without sensor M, Y, C, P: Photo-microsensor K, E: Proximity sensor 1: For sensor rails only	N: Standard treatment L: Anti corrosive black coating	N: Standard grease S: Dust preventive grease	No symbol: No dowel pin hole PR: For guide rail only

● FULL-COVER TYPE LONG BLOCK CONFIGURATIONS

(Unit: mm)

Guide rail length L_1	Overall length L_2	N_1	$M_1 \times P_1$	N_2	$M_2 \times P_2$	Maximum stroke
						Long block
						1 block
540	631	70	4×100	20	2×250	415
640	731		5×100		2×300	515
740	831		6×100		2×350	615
840	931		7×100		2×400	715
940	1031		8×100		3×300	815

● PERMISSIBLE SPEED / MASS

Guide rail length L_1 (mm)	Permissible speed (mm/s)			Mass (kg)	
	Lead			Full-cover type	Mass of table (slide block + table + table cover parts)
	5mm	10mm	20mm	A: With 1 long block	
540	260	520	1040	9.2	1.27
640				10.5	
740				11.8	
840				13.0	
940	200	410	830	14.3	

(Note 1) Mass of full-cover type actuators in the above table includes mass of table.

(Note 2) For long rail configurations, please consult KURODA.

● DOWEL PIN HOLE (Guide rail only)

Please refer to P87 of SE45 series regarding to guide rail positioning hole.


Model No.

Model No.	Lead	Slide block	Guide rail length	Performance grade
SC45	**	*	*** 540, 640, 740, 840, 940	* W, U
	05: 5mm 10: 10mm 20: 20mm	A: With 1 long block		


● COVER CONFIGURATION

The below-mentioned configurations with grease nipple and/or wiper are available for full-covered series. Standard specification (Symbol: N) has a plug equipped with grease filler hole.


Full-cover type with grease nipple (Symbol: G)

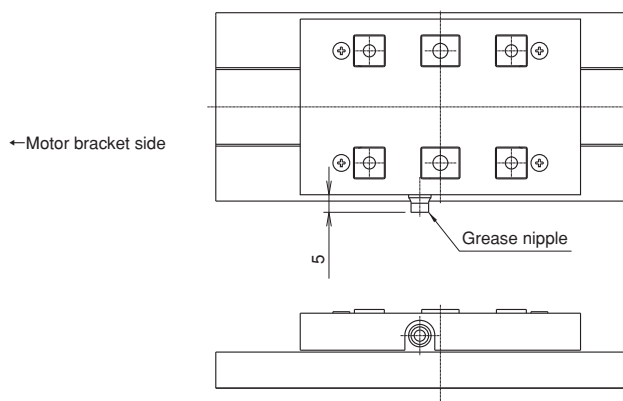

Full-cover type with wiper (Symbol: S)

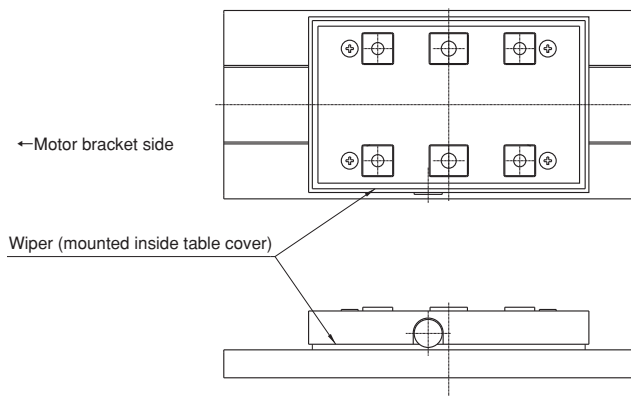

Full-cover type with grease nipple and wiper (Symbol: D)

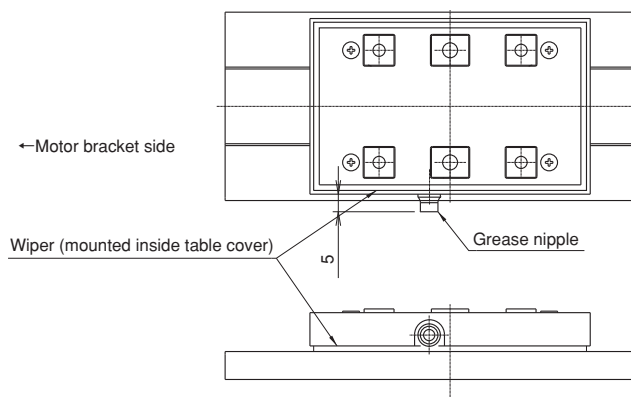


Motor bracket configuration	Type of cover	Sensor
**	*	*
A0, A1, A2, A3, A4, A5, A6, RN, E□, F□, G□	N: Standard cover G: With grease nipple S: With wiper D: With grease nipple and wiper	N: Without sensor M, Y, C, P: Photo-microsensor K, E: Proximity sensor 1: For sensor rails only

Surface treatment	Grease
*	*
N: Standard treatment L: Anti corrosive black coating	N: Standard grease S: Dust preventive grease


Dowel pin hole
**
No symbol: No dowel pin hole PR: For guide rail only

● SENSOR

Symbol C (NPN) / P (PNP), M (NPN) / Y (PNP): Photo-microsensor (OMRON, Panasonic Industrial Devices SUNX)

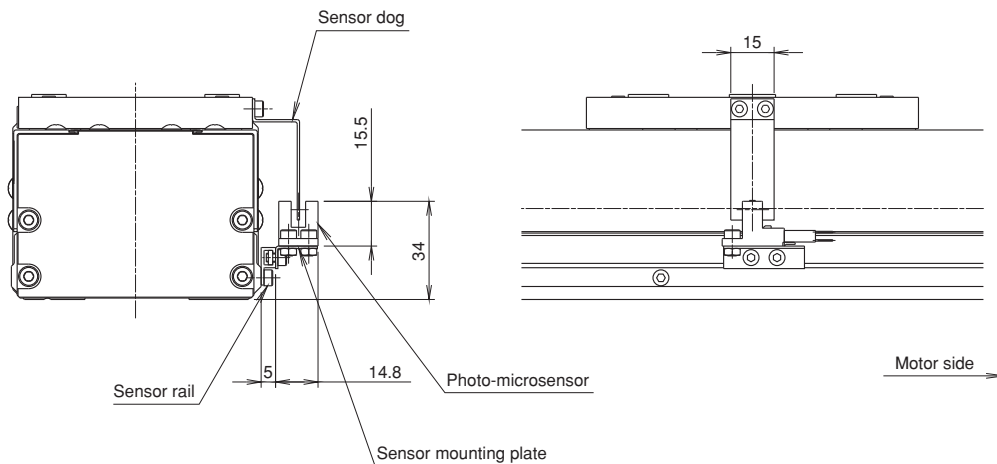

Symbol K (NPN) / E (PNP): Proximity sensor (Azbil)

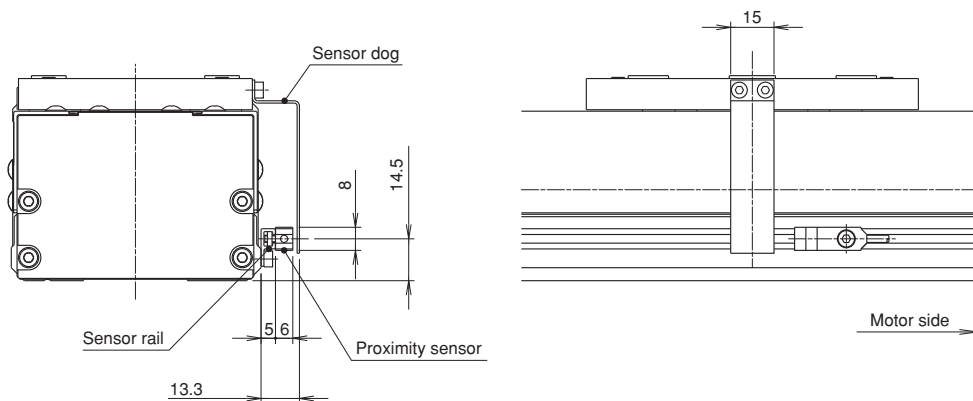

● SENSOR RAIL

Sensor rails only available with no sensors.

Sensor rail No. 1

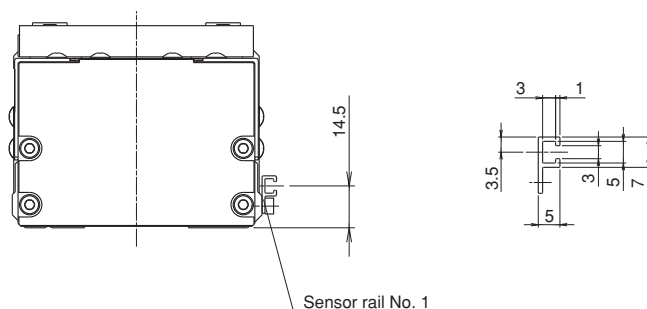


PHOTO-MICROSENSOR/Panasonic Industrial Devices SUNX

● Specifications

Model No.	NPN output type	PM-L24	PM-Y54
	PNP output type	-	PM-Y54P
Sensing range	5mm (fixed)		
Sensing object	0.8X1.8mm opaque object		
Hysteresis	0.05mm or less		
Repeatability	0.03mm or less		
Supply voltage	5 to 24V DC $\pm 10\%$ Ripple P-P 10% or less		
Current consumption	15mA or less		
Output	NPN output type: NPN transistor open collector Maximum sink current : 50mA Applied voltage : 30V DC or less (between output and 0V) Residual voltage : 0.7V or less (at 50mA sink current) 0.4V or less (at 16mA sink current)		
	PNP output type: PNP transistor open collector Maximum sink current : 50mA Applied voltage : 30V DC or less (between output and +V) Residual voltage : 0.7V or less (at 50mA sink current) 0.4V or less (at 16mA sink current)		
Output operation	Incorporated with 2 outputs : Light-ON/Dark-ON		
Response time	Under light received condition : 20 μ s or less Under light shielded condition : 100 μ s or less (Response frequency 1kHz or above)		
Operation indicator	Vermillion LED (lights up under light received condition)		
Ambient illuminance	Fluorescent light : 1000 lx at the light-receiving face		
Ambient temperature	-25 to +55°C: (No dew condensation or icing allowed), Storage: -30 to +80°C:		
Ambient humidity	35 to 85% RH, Storage: 35 to 85% RH		
Voltage withstandability	1000V AC for 1 min. between all supply terminals connected together and enclosure		
Insulation resistance	50M Ω or more with 250V DC megger between all supply terminals connected together and enclosure		
Vibration resistance	10 to 2000Hz frequency, 1.5mm amplitude in X, Y and Z directions for 2 hours each		
Shock resistance	15000mm/s ² acceleration (1500G approx.) in X, Y and Z directions for 3 times each		
Cable	0.09mm ² 4-core cabtyre cable, 1m long	-	
Mass	10g approx.	3g approx.	
Material	Case	Poly Butylene Terephthalate (PBT)	
	Cover	Polycarbonate	
	Terminal	Solder plated (PM-Y54P only)	


Accessories	Specifications		
	S	M	Y
Sensor Model No.	PM-L24 (NPN) : 3	PM-Y54 (NPN) : 3	PM-Y54P (PNP) : 3
Sensor mounting plate (Note 1)	: 3	: 3	: 3
Sensor rail	: 1	: 1	: 1
Sensor dog (Note 2)	: 1	: 1	: 1
Connector for sensor	-	CN-14 : 3	CN-14 : 3

(Note 1) Sensor mounting plate is applied to SE and SC series.


(Note 2) 2 sensor dogs are used for SG33□D-150 sensor with Symbol "M" or "Y".

● I/O circuit diagram

NPN output type

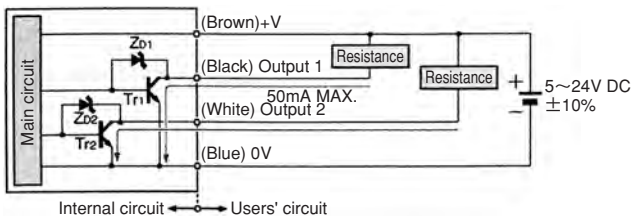


PNP output type

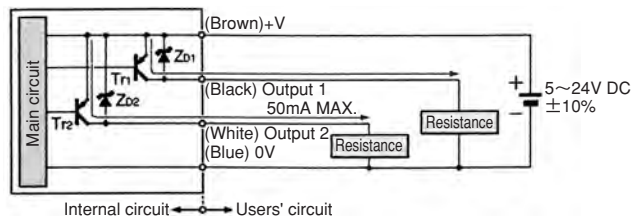


● Wiring diagram

NPN output type

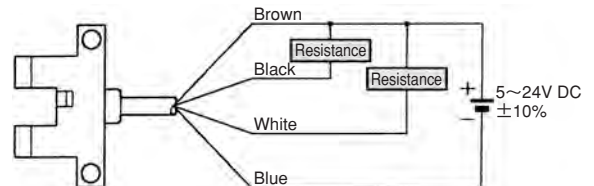

PNP output type

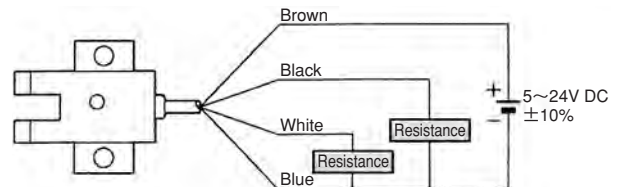

(Note) For detailed information and operating precautions, refer to catalogs and operating instructions supplied by the sensor maker.

PROXIMITY SENSOR/Azbil


● Specifications

Model No.	NPN output type	APM-D3B1, APM-D3B1F (different-frequency type)
	PNP output type	APM-D3E1, APM-D3E1F (different-frequency type)
Sensing method		High-frequency oscillation type (unshielded type)
Rated supply voltage		DC 12/24V
Rated sensing distance		2.5mm ±15%
Usable sensing distance		0~1.8mm
Sensing object		15×15mm t=1mm Iron
Hysteresis		15% or less in sensing length
Operating voltage range		DC 10.8~26.4V(Ripple 10% or less)
Current consumption		10mA or less
Output type		NPN transistor open collector
		PNP transistor open collector
Operation mode		Normally closed (N.C.)
Control Output	Switching current	30mA or less (resistance load)
	Residual voltage	1V or less (switching current 30mA)
	Output dielectric strength	26.4V
Response frequency		120Hz
Repeatability		0.05mm or less
Temperature characteristics		±15% max. for the range of -10 to +55°C when +25°C is taken as standard temperature in sensing distance
Supply voltage characteristics		±2% max. with 10% voltage fluctuation with rated supply voltage as standard voltage in sensing distance
Operation indicator		Lights up in orange under light received condition
Ambient temperature		-10~+55°C
Ambient temperature at storage		-25~+70°C
Ambient humidity		35~85%RH
Insulation resistance		50MΩ or more (measured by DC 500V insulation ohmmeter)
Voltage withstandability		1000V AC , 50/60Hz for 1 min. between all supply terminals connected together and enclosure
Vibration resistance		10 to 55Hz, 1.5mm amplitude in X, Y, and Z directions for 2 hours each
Shock resistance		500m/s ² in X, Y, and Z directions for 3 times each
Protection		IP67 (IEC529)
Mass		10g approx.
Circuit protection		Surge absorption, reverse connection protection circuit (-S: load short protection)
Connection		Pre-leaded (oil-resistant cord: 2.5 mm O.D., 0.08 mm ² , 3-core, 1 m)
Case material		Polyarylate resin
Tightening torque		0.5N·m (M2.6 screw)

Accessories	Specifications	
	K	E
Sensor Model No.	APM-D3B1 (NPN) : 2 APM-D3B1F (NPN) : 1	APM-D3E1 (PNP) : 2 APM-D3E1F (PNP) : 1
Sensor rail	: 1	: 1
Sensor dog	: 1	: 1

● Wiring diagram

NPN output type

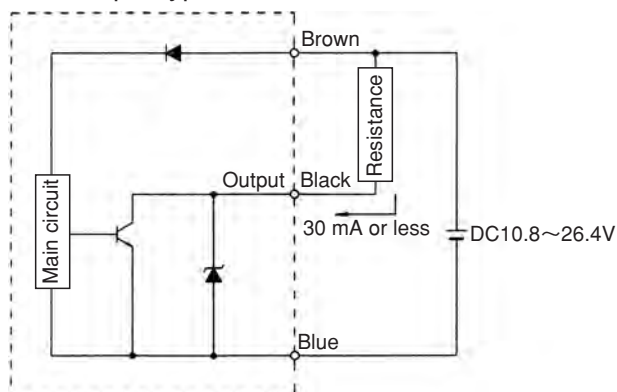

PNP output type

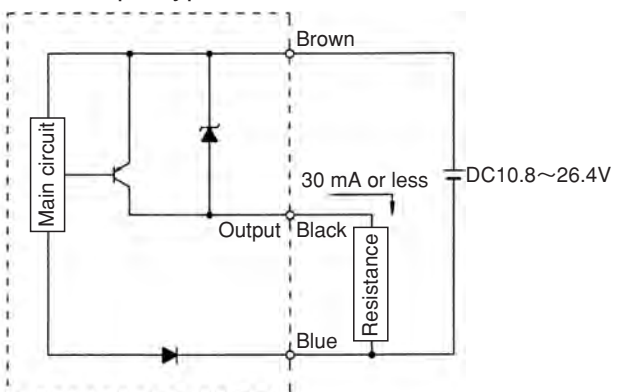


PHOTO-MICROSENSOR/OMRON

● Specifications

Model No.	NPN output type	EE-SX674	EE-SX671
	PNP output type	EE-SX674P	EE-SX671P
Sensing range	5mm (slot width)		
Sensing object	Opaque object 2 x 0.8mm or more		
Hysteresis	0.025mm or less		
Light source (peak emission wavelength)	GaAs IRED (940 nm)		
Operation indicator	Lights up at light-received (Red LED)		
Supply voltage	5 to 24V DC ±10% Ripple P-P 10% or less		
Current consumption	12mA and less (connector type, when to open L connector)		
Output	NPN output type: NPN transistor open collector Output : 5 to 24V DC 100mA or less Residual voltage : 0.8V or less (at 100mA load current), 0.4V or less (at 40mA load current) OFF-state current 0.5mA or less		
	PNP output type : PNP transistor open collector Output : 5 to 24V DC 50mA or less Residual voltage : 1.3V or less (at 50mA load current) OFF-state current 0.5mA or less		
Response frequency	1kHz or above (3kHz in average)		
Ambient illuminance	Fluorescent light : 1000 lx at the light-receiving face		
Ambient temperature	Operation: -25 to +55°C, Storage: -30 to +80°C (no dew condensation or icing allowed)		
Ambient humidity	Operation: 5 to 85% RH, Storage: 5 to 95% RH (no dew condensation or icing allowed)		
Vibration resistance	20 to 2000Hz (100m/s ² peaked acceleration), 1.5mm amplitude in X, Y and Z directions for 2 hours each (4min. cycle)		
Shock resistance	500m/s ² in X, Y and Z directions for 3 times each		
Protection	IP50 IEC60529		
Connection	Connector (available for direct soldering)		
Mass	3g approx.		
Material	Case	Poly Butylene Terephtalate (PBT)	
	Cover	Polycarbonate	
	Terminal	Polycarbonate	

Accessories	Specifications			
	C	P	H (Note 2)	J (Note 2)
Sensor Model No.	EE-SX674 (NPN) : 3	EE-SX674P (PNP) : 3	EE-SX671 (NPN) : 3	EE-SX671P (PNP) : 3
Connector for sensor	EE-1001: 3	EE-1001: 3	EE-1001: 3	EE-1001: 3
Sensor rail	: 1	: 1	: 1	: 1
Sensor dog (Note 3)	: 1	: 1	: 1	: 1
Sensor mounting plate (Note 1)	: 3	: 3		


(Note 1) Sensor mounting plate is applied to SE and SC series.

(Note 2) If H or J configuration is used for the model without cover in SG33 series, a sensor mounting plate is attached in addition to the above-mentioned accessories.


(Note 3) 2 sensor dogs are used for SG33□D-150 sensor with Symbol "M" or "Y".

● I/O circuit diagram

NPN output type

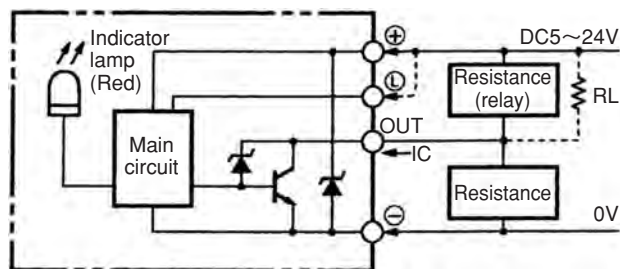

PNP output type

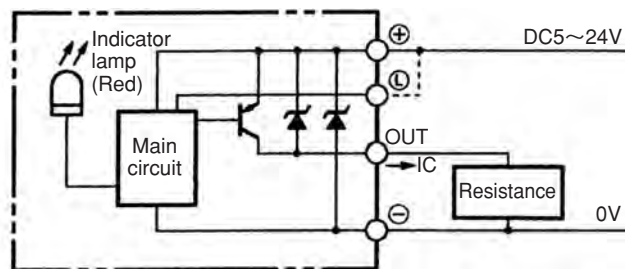

(Note) For detailed information and operating precautions, refer to catalogs and operating instructions supplied by the sensor maker.


CONTENTS

TECHNICAL DATA FOR BALLSCREW ACTUATORS

Ballscrew actuator selection guide	110
Expected-life design for guide	111-113
Expected-life design for ball screw and fixed side bearing	114
Example of selection ① For horizontal use	115
Example of selection ② For vertical use	116
Ballscrew actuator specification data sheet - Sample	118
Ballscrew actuator specification data sheet.....	119

BALLSCREW ACTUATOR SELECTION GUIDE

Similar to ball screw selections, there is no instant way of selecting appropriate ballscrew actuators for various purposes. The following is an example of general procedures in actuator selection, with some considerations to be made on each step and pages to refer to.

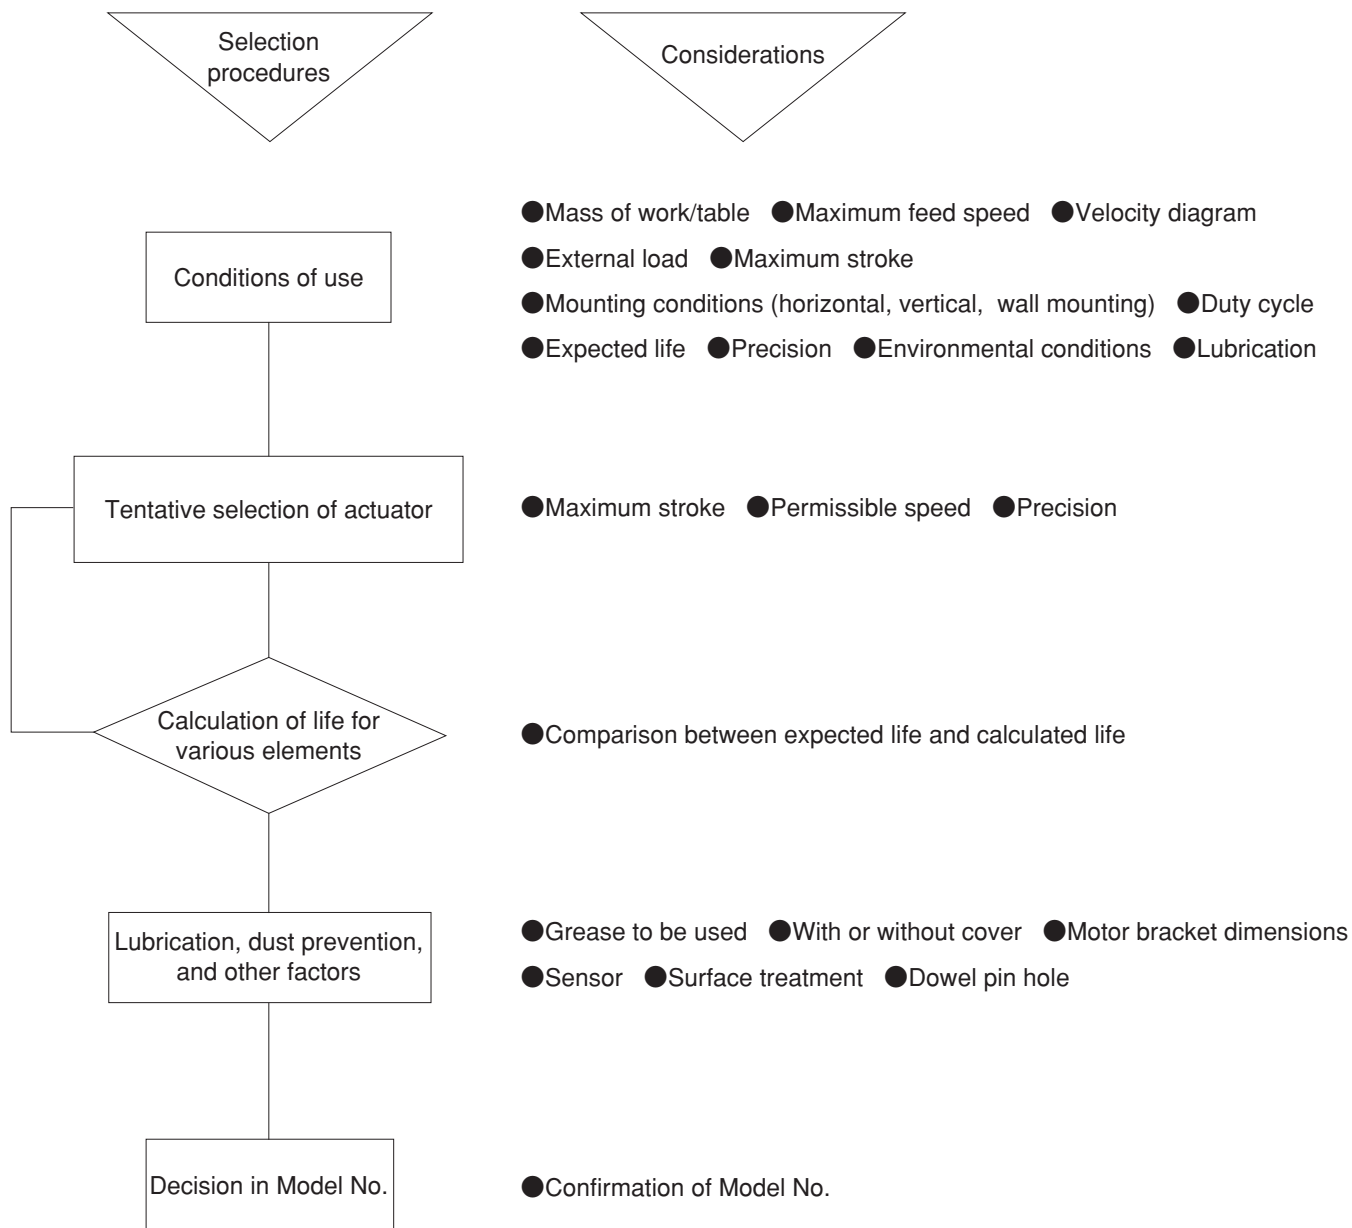

Technical Data

LIFE EXPECTANCY

The shortest life expectancy of among guid-rail, ballscrew and support bearing can be defined as the life expectancy of ballscrew actuators, SE, SG, and SC series.

The following formula is used to calculate the life expectancy.

LIFE EXPECTANCY OF GUIDE

Calculate the life expectancy of guide using the following formula:

$$L_G = \left(\frac{f_c \cdot C}{f_w \cdot P_T} \right)^3 \cdot 50 \text{ ————— Formula (1)}$$

L_G : Life expectancy operational length (km)

f_c : Contact factor (see Table 1)

f_w : Load factor (see Table 2)

C : Basic dynamic load rating (N)

P_T : Calculated load per block (N)

Calculation of P_T

To calculate the life expectancy using Formula (1), you need to obtain the calculated load per block (P_T) in consideration of actual moment load.

If the acceleration is high or short-stroke operation is conducted, calculate P_T in consideration of acceleration. This acceleration calculation is made for a mass loaded on SG, SE, and SC.

Obtain the calculated load in uniform motion, accelerated motion, and decelerated motion, and its average figure is used as P_T .

For the calculation of P_T , select a calculation formula according to the installation conditions.

If acceleration needs not to be considered,

$P_T = P_{TC}$ (See Formula (2), (5) and (8)) can be used for calculation. However, you can calculate only the approximate value in this formula, therefore it is recommended that you calculate the life expectancy with an ample margin.

Table 1 Contact factor (f_c)

Number of blocks to be used in contact, when single axis module is used.	Contact factor (f_c)
1	1.0
2	0.81

Table 2 Load factor (f_w)

Operating condition		Load factor (f_w)
Vibration and shock	Speed	
Zero	250mm/s or less	1.0~1.5
Small	1000mm/s or less	1.0~2.0
Large	1000mm/s or more	2.0~3.5

Table 3 Moment equivalent factor

	$E_p(E2p)$	$E_y(E2p)$	$E_r(E2r)$
SG20**A	2.25×10^{-1}	1.89×10^{-1}	7.84×10^{-2}
SG20**B	3.98×10^{-2}	3.34×10^{-2}	3.92×10^{-2}
SG26**A	1.51×10^{-1}	1.27×10^{-1}	5.88×10^{-2}
SG26**B	2.72×10^{-2}	2.28×10^{-2}	2.94×10^{-2}
SG33**A	1.26×10^{-1}	1.06×10^{-1}	4.55×10^{-2}
SG33**B	2.20×10^{-2}	1.84×10^{-2}	2.27×10^{-2}
SG33**C	2.31×10^{-1}	1.94×10^{-1}	4.55×10^{-2}
SG33**D	3.09×10^{-2}	2.59×10^{-2}	2.27×10^{-2}
SG46**A	8.39×10^{-2}	7.04×10^{-2}	3.17×10^{-2}
SG46**B	1.56×10^{-2}	1.31×10^{-2}	1.59×10^{-2}
SG46**C	1.39×10^{-1}	1.17×10^{-1}	3.17×10^{-2}
SG46**D	2.15×10^{-2}	1.18×10^{-2}	1.59×10^{-2}
SG55**A	6.80×10^{-2}	5.71×10^{-2}	2.74×10^{-2}
SG55**B	1.35×10^{-2}	1.14×10^{-2}	1.37×10^{-2}
SE15**A	2.70×10^{-1}	2.45×10^{-1}	9.64×10^{-2}
SE15**B	4.50×10^{-2}	3.80×10^{-2}	4.82×10^{-2}
SE23**A	1.52×10^{-1}	1.37×10^{-1}	5.22×10^{-2}
SE23**B	2.54×10^{-2}	2.29×10^{-2}	2.61×10^{-2}
SE30**A	1.17×10^{-1}	9.83×10^{-2}	4.54×10^{-2}
SE30**B	1.95×10^{-2}	1.64×10^{-2}	2.27×10^{-2}
SE45**A	8.39×10^{-2}	7.04×10^{-2}	3.17×10^{-2}
SE45**B	1.56×10^{-2}	1.31×10^{-2}	1.59×10^{-2}
SE45**C	1.26×10^{-1}	1.06×10^{-1}	3.17×10^{-2}
SE45**D	2.10×10^{-2}	1.76×10^{-2}	1.59×10^{-2}
SC23**A	1.52×10^{-1}	1.37×10^{-1}	5.22×10^{-2}
SC30**A	1.17×10^{-1}	9.83×10^{-2}	4.54×10^{-2}
SC45**A	8.39×10^{-2}	7.04×10^{-2}	3.17×10^{-2}

(Note) The specifications of a model with two blocks show factors when the two blocks are used in contact.

● P_T in the case of Horizontal Movement (Horizontal Installation)

① For uniform motion (P_{TC})

$$P_{TC} = \frac{1}{n} \cdot W + Ep \cdot M_{pL} + Ey \cdot M_{yL} + Er \cdot M_{rL} \text{——Formula (2)}$$

② For accelerated motion (P_{Ta})

$$P_{Ta} = \frac{1}{n} \cdot W + Ep (M_{pL} + m \cdot a_a \cdot Z) + Ey (M_{yL} + m \cdot a_a \cdot X) + Er \cdot M_{rL} \text{——Formula (3)}$$

If item $(M_{pL} + m \cdot a_a \cdot Z)$ or $(M_{yL} + m \cdot a_a \cdot X)$ is a negative value, the value should be set to 0.

③ For decelerated motion (P_{Td})

$$P_{Td} = \frac{1}{n} \cdot W + Ep (M_{pL} + m \cdot \alpha_d \cdot Z) + Ey (M_{yL} + m \cdot \alpha_d \cdot X) + Er \cdot M_{rL} \text{——Formula (4)}$$

If item $(M_{pL} + m \cdot \alpha_d \cdot Z)$ or $(M_{yL} + m \cdot \alpha_d \cdot X)$ is a negative value, the value should be set to 0.

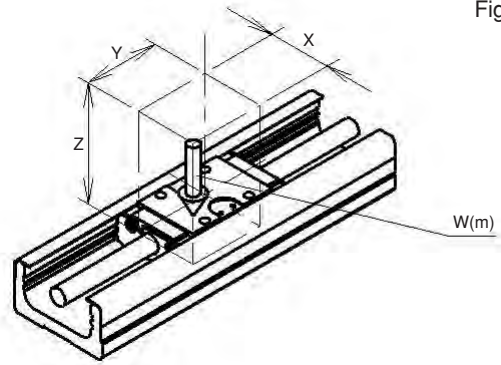


Figure 1

If a load is applied from a different direction other than W (m) in this figure, contact KURODA.

P_{TC} : Calculated load per block in uniform motion (N)

P_{Ta} : Calculated load per block in accelerated motion (N)

P_{Td} : Calculated load per block in decelerated motion (N)

n : Number of block of SG / SE / SC

W : Load (N)

m : Load mass (kg)

a_a : Acceleration in accelerated motion (m/sec²)

α_d : Acceleration in decelerated motion (m/sec²) (with a minus sign)

X : Distance from center of SG / SE / SC to center of gravity of loaded mass (mm)

Y : Distance from center of SG / SE / SC to center of gravity of loaded mass (mm)

Z : Distance from center of SG / SE / SC ballscrew to center of gravity of loaded mass (mm)

E_p : Moment equivalent factor in pitching direction (see Table 3)

E_y : Moment equivalent factor in yawing direction (see Table 3)

E_r : Moment equivalent factor in rolling direction (see Table 3)

M_{pL} : Load moment in pitching direction (N·mm)

$$M_{pL} = W \cdot Y$$

M_{yL} : Load moment in yawing direction (N·mm)

$$M_{yL} = 0 \text{ (The load moment is zero under this usage.)}$$

M_{rL} : Load moment in rolling direction (N·mm)

$$M_{rL} = W \cdot X$$

(Note) For the moment directions, see Pages 3, 53 and 91.

● P_T in the Case of Horizontal Movement (Wall Installation)

① For uniform motion (P_{TC})

$$P_{TC} = \frac{1}{1.19 \cdot n} \cdot W + Ep \cdot M_{pL} + Ey \cdot M_{yL} + Er \cdot M_{rL} \text{——Formula (5)}$$

② For accelerated motion (P_{Ta})

$$P_{Ta} = \frac{1}{1.19 \cdot n} \cdot W + Ep (M_{pL} + m \cdot a_a \cdot Z) + Ey (M_{yL} + m \cdot a_a \cdot X) + Er \cdot M_{rL} \text{——Formula (6)}$$


If item $(M_{pL} + m \cdot a_a \cdot Z)$ or $(M_{yL} + m \cdot a_a \cdot X)$ is a negative value, the value should be set to 0.

③ For decelerated motion (P_{Td})

$$P_{Td} = \frac{1}{1.19 \cdot n} \cdot W + Ep (M_{pL} + m \cdot \alpha_d \cdot Z) + Ey (M_{yL} + m \cdot \alpha_d \cdot X) + Er \cdot M_{rL} \text{——Formula (7)}$$

If item $(M_{pL} + m \cdot \alpha_d \cdot Z)$ or $(M_{yL} + m \cdot \alpha_d \cdot X)$ is a negative value, the value should be set to 0.

Figure 2

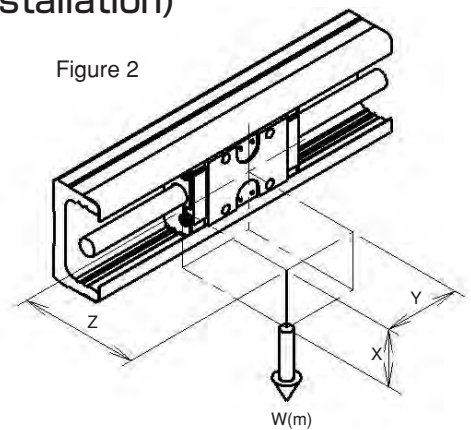

If load is applied from a different direction other than W (m), contact KURODA.

P_{TC} : Calculated load per block in uniform motion (N)

P_{Ta} : Calculated load per block in accelerated motion (N)

P_{Td} : Calculated load per block in decelerated motion (N)

n : Number of block of SG / SE / SC

W : Load (N)

m : Load mass (kg)

a_a : Acceleration in accelerated motion (m/sec²)

α_d : Acceleration in decelerated motion (m/sec²) (with a minus sign)

X : Distance from center of SG / SE / SC to center of gravity of loaded mass (mm)

Y : Distance from center of SG / SE / SC to center of gravity of loaded mass (mm)

Z : Distance from center of SG / SE / SC ballscrew to center of gravity of loaded mass (mm)

E_p : Moment equivalent factor in pitching direction (see Table 3)

E_y : Moment equivalent factor in yawing direction (see Table 3)

E_r : Moment equivalent factor in rolling direction (see Table 3)

M_{pL} : Load moment in pitching direction (N·mm)

$$M_{pL} = 0 \text{ (The load moment is zero under this usage.)}$$

M_{yL} : Load moment in yawing direction (N·mm)

$$M_{yL} = W \cdot Y$$

M_{rL} : Load moment in rolling direction (N·mm)

$$M_{rL} = W \cdot Z$$

(Note) For the moment directions, see Pages 3, 53 and 91.

● P_T in the Case of Vertical Movement

① For uniform motion (P_{TC})

$$P_{TC} = E_p \cdot M_{pL} + E_y \cdot M_{yL} + E_r \cdot M_{rL} \text{—— Formula (8)}$$

② For accelerated motion (P_{Ta})

$$P_{Ta} = E_p (M_{pL} + m \cdot a_a \cdot Z) + E_y (M_{yL} + m \cdot a_a \cdot X) + E_r \cdot M_{rL} \text{—— Formula (9)}$$

If item $(M_{pL} + m \cdot a_a \cdot Z)$ or $(M_{yL} + m \cdot a_a \cdot X)$ is a negative value, the value should be set to 0.

③ For decelerated motion (P_{Td})

$$P_{Td} = E_p (M_{pL} + m \cdot a_d \cdot Z) + E_y (M_{yL} + m \cdot a_d \cdot X) + E_r \cdot M_{rL} \text{—— Formula (10)}$$

If item $(M_{pL} + m \cdot a_d \cdot Z)$ or $(M_{yL} + m \cdot a_d \cdot X)$ is a negative value, the value should be set to 0.

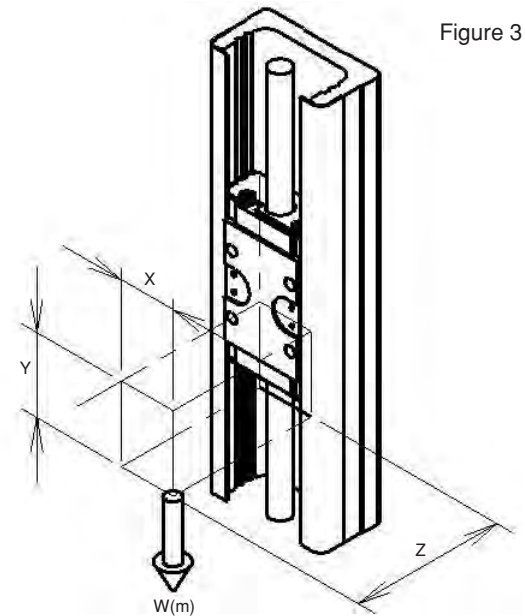


Figure 3

If load is applied from a different direction other than W (m) in this figure, contact KURODA.

P_{TC} : Calculated load per block in uniform motion (N)

P_{Ta} : Calculated load per block in accelerated motion (N)

P_{Td} : Calculated load per block in decelerated motion (N)

n : Number of block of SG / SE / SC

W : Load (N)

m : Load mass (kg)

a_a : Acceleration in accelerated motion (m/sec²)

a_d : Acceleration in decelerated motion (m/sec²) (with a minus sign)

X : Distance from center of SG / SE / SC to center of gravity of loaded mass (mm)

Y : Distance from center of SG / SE / SC to center of gravity of loaded mass (mm)

Z : Distance from center of SG / SE / SC ballscrew to center of gravity of loaded mass (mm)

E_p : Moment equivalent factor in pitching direction (see Table 3)

E_y : Moment equivalent factor in yawing direction (see Table 3)

E_r : Moment equivalent factor in rolling direction (see Table 3)

M_{pL} : Load moment in pitching direction (N·mm)

$$M_{pL} = W \cdot Z$$

M_{yL} : Load moment in yawing direction (N·mm)

$$M_{rL} = W \cdot X$$

M_{rL} : Load moment in rolling direction (N·mm)

$$M_{yL} = 0 \text{ (The load moment is zero under this usage.)}$$

(Note) For the moment directions, see Pages 3, 53 and 91.

● Using one of the above calculation formulas according to your usage, calculate average load in each motion to obtain calculated load per block (P_T).

$$P_T = \sqrt[3]{\frac{1}{(S1+S2+S3)} (P_{Ta}^3 \cdot S1 + P_{TC}^3 \cdot S2 + P_{Td}^3 \cdot S3)} \text{—— Formula (11)}$$

Formula 4

P_T : Calculated load per block (N)

S1 : Traveling distance in accelerated motion (mm) (see Figure 4)


S2 : Traveling distance in uniform motion (mm) (see Figure 4)

S3 : Traveling distance in decelerated motion (mm) (see Figure 4)

P_{Ta} : Calculated load per block in accelerated motion (N) - Formulas (3), (6), (9)

P_{TC} : Calculated load per block in uniform motion (N) - Formulas (2), (5), (8)

P_{Td} : Calculated load per block in decelerated motion (N) - Formulas (4), (7), (10)

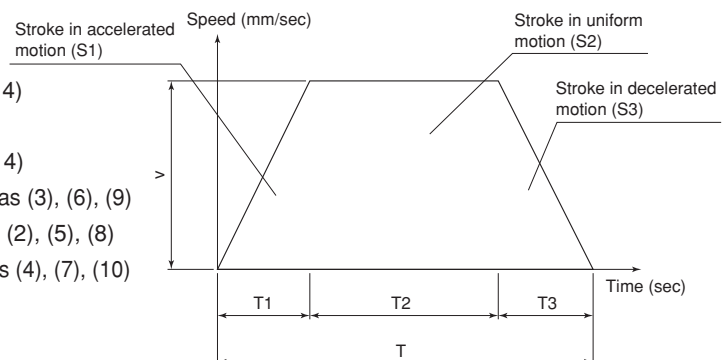

● LIFE EXPECTANCIES OF BALL SCREW AND SUPPORT BEARING

The life expectancies of the ball screw and the support bearing can be calculated using the following common calculation formula shown as below. Therefore, compare the dynamic load ratings of the ball screw and the support bearing and substitute a smaller value in the formula for calculation.

$$L_a = \left(\frac{1}{f_w} \cdot \frac{C_a \text{ or } C_b}{P_a} \right)^3 \cdot \varnothing \text{ ————— Formula (12)}$$

L_a : Life expectancy operational length (km)

f_w : Load factor (see Table 2)

C_a : Basic dynamic load rating of ball screw (N)

C_b : Basic dynamic load rating of support bearing (N)

P_a : Ave. Axial load (N)

\varnothing : Ball screw lead (mm)

● Calculation of P_a

To calculate the life expectancy using Formula (6), calculate P_a in consideration of acceleration. Calculate the axial load in uniform, accelerated, and decelerated motions and its average figure is used as P_a .

● In the Case of Horizontal Movement

① For uniform motion (P_{ac})

$$P_{ac} = m \cdot W + F + f_b \cdot n \text{ ————— Formula (13)}$$

② For accelerated motion (P_{aa})

$$P_{aa} = m \cdot W + F + f_b \cdot n + (m + m_b \cdot n) \alpha_a \text{ ————— Formula (14)}$$

③ For decelerated motion (P_{ad})

$$P_{ad} = m \cdot W + F + f_b \cdot n - (m + m_b \cdot n) \alpha_d \text{ ————— Formula (15)}$$

P_{ac} : Axial load in uniform motion (N)

P_{aa} : Axial load in accelerated motion (N)

P_{ad} : Axial load in decelerated motion (N)

μ : Friction factor (0.006)

W : Load on block (N)

F : External force (load) in axial direction (N)

f_b : Slide resistance per block (N) (see Table 4)

n : Number of blocks of SG / SE

m : Load mass (kg)

m_b : Block mass of SG / SE (kg)

g : Gravitational acceleration (9.8 m / sec²)

α_a : Acceleration in accelerated motion (m / sec²)

α_d : Acceleration in decelerated motion (m / sec²)

● In the Case of Vertical Movement

① For uniform motion (P_{ac})

$$P_{ac} = (m + m_b \cdot n) g + F + f_b \cdot n \text{ ————— Formula (16)}$$

② For accelerated motion (P_{aa})

$$P_{aa} = (m + m_b \cdot n) \cdot (g + \alpha_a) + F + f_b \cdot n \text{ ————— Formula (17)}$$

③ For decelerated motion (P_{ad})

$$P_{ad} = (m + m_b \cdot n) \cdot (g - \alpha_d) + F + f_b \cdot n \text{ ————— Formula (18)}$$

● Using one of the above calculation formulas according to your usage, calculate an average axial load (P_a).

$$P_a = \sqrt[3]{\frac{1}{(S1+S2+S3)} (P_{aa}^3 \cdot S1 + P_{ac}^3 \cdot S2 + P_{ad}^3 \cdot S3)} \text{ ————— Formula (19)}$$

P_a : Average axial load (N)

$S1$: Traveling distance in accelerated motion (mm) (see Figure 4)

$S2$: Traveling distance in uniform motion (mm) (see Figure 4)

$S3$: Traveling distance in decelerated motion (mm) (see Figure 4)

P_{aa} : Axial load in accelerated motion (N) - Formulas (14), (17)

P_{ac} : Axial load in uniform motion (N) - Formulas (13), (16)

P_{ad} : Axial load in decelerated motion (N) - Formulas (15), (18)

Table 4 Slide resistance per block (f_b) (seal resistance)
(Unit: N)

Model No.	Accuracy grade	
	H	P
SG20	2.3	4.9
SG26	5.4	9.8
SG33	4.4	10.2
SG46	7.4	13.3
SG55	9	16

(Unit: N)

Model No.	Accuracy grade
	U/W
SE15	2.0
SE23, SC23	2.5
SE30, SC30	2.5
SE45, SC45	7.5


EXAMPLE OF BALLSCREW ACTUATOR SELECTION

● Linear motion robot - X-axis


<Specifications>

Mass of work and table: M	10kg
Load distribution	See right side diagram.
Maximum stroke: st	550mm
Fast-feed speed: v	500mm/s
Acceleration/deceleration time constant: t	0.2 s
Maximum motor speed	6000min ⁻¹
Orientating orientation	Horizontal
Repeated positioning accuracy	±0.01 mm or less
Expected life	30,000h

Load distribution diagram

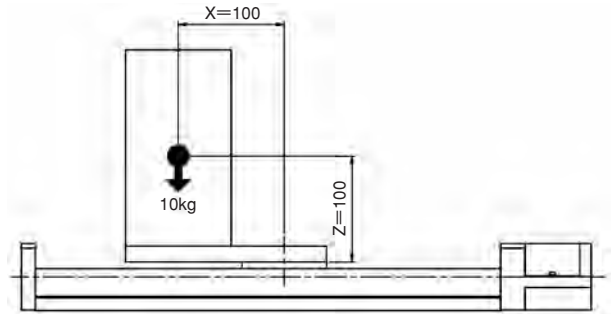

Duty cycle model diagram

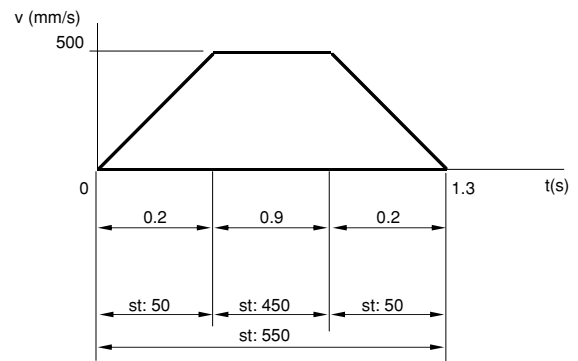

① Tentatively select SE4510A-740W-A1NN-NN in SE series, based on the conditions such as stroke and speed.

② Calculation of life expectancy

②-1. Calculating life expectancy of guide

Considering the usage with moment being loaded, average load and life expectancy were calculated in accordance with "LIFE EXPECTANCY OF GUIDE" on page 111, and they resulted in 1,274 N and 39,030 hours, respectively. The load coefficient for the above calculation was determined to be 2, based on the conditions of use.

②-2. Calculating expected life of ball screw and support bearings

Average axial load and life expectancy were calculated in accordance with "LIFE EXPECTANCIES OF BALL SCREW AND SUPPORT BEARING" on page 114, and the axial load resulted in 14.9 N and expected life of both ball screw and support bearing in over a million hours. The load coefficient for the above calculation was determined to be 2, based on the conditions of use.

③ Results of the selection

The above calculation results of life expectancies confirmed that the tentatively selected model would satisfy the required specifications. Since there is no other particular specification to be further considered, the model is selected officially.

Selected model of ballscrew actuator: SE4510A-740W-A1NN-NN

If longer life expectancy than the calculated life is preferred, make re-calculation after changing specifications, such as upgrading model size or adding extra slide block.


EXAMPLE OF BALLSCREW ACTUATOR SELECTION

● Lift - Z-axis


<Specifications>

Mass of work and table: M	6kg
Load distribution	See right side diagram.
Maximum stroke: st	350mm
Fast-feed speed: v	500mm/s
Acceleration/deceleration time constant: t	0.2 s
Maximum motor speed	6000min ⁻¹
Orientating orientation	Vertical
Repeated positioning accuracy	±0.003 mm or less
Life expectancy	40,000h

Load distribution diagram

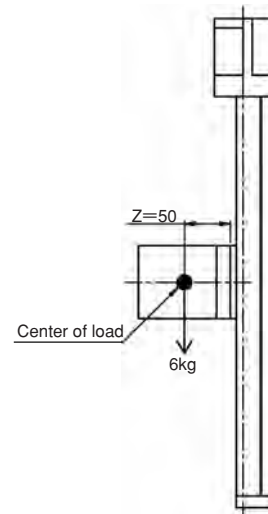

Duty cycle model diagram

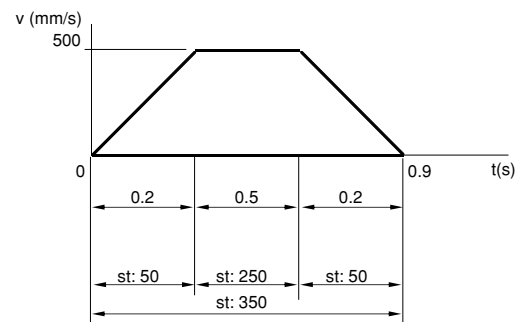

① Tentative selection of ballscrew actuator

Tentatively select SG3310A-500H-A0NN-NN in SG series, based on the conditions such as strokes and speed.

② Calculation of life expectancy

②-1. Calculating life expectancy of guide

Considering the usage with moment being loaded, average load and life expectancy were calculated in accordance with "LIFE EXPECTANCY OF GUIDE" on page 111, and they resulted in 805 N and 17,166 hours, respectively. The load coefficient for the above calculation was determined to be 2, based on the conditions of use.

②-2. Calculating expected life of ball screw and support bearing

Average axial load and life expectancy were calculated in accordance with "LIFE EXPECTANCIES OF BALL SCREW AND SUPPORT BEARING" on page 114, and the axial load resulted in 60N and expected life of ball screw and support bearing in 44,202 and 353,620 hours, respectively. The load coefficient for the above calculation was determined to be 2, based on the conditions of use.

③ Results of the selection

According to the above results of life expectancies, the life of the guide does not satisfy the life expectancy requirement. Since the ball screw and support bearing have satisfactory life expectancies, make re-calculation after changing the block on the guide. Leaving the guide rail length and required stroke as they are, change the model to SG3310D-500H-A0NN-NN.

④ Re-calculation of life

As in the previous step, average load and life expectancy were calculated in accordance with "LIFE EXPECTANCY OF GUIDE" on page 111, and they resulted in 198 N (load per block) and 146,740 hours, respectively.

⑤ Results of the re-selection

The results of re-calculation of life expectancy of the guide confirmed that the selected model would satisfy required hours of life expectancy.


BALLSCREW ACTUATOR SPECIFICATION DATA SHEET

Company Name		Date	
Department		Contact personnel	
Address		Tel / Fax	
Name of Equipment/machine used		Location of use	
Drawing/conceptual drawing attached?	<input type="checkbox"/> Yes pieces of pages	<input type="checkbox"/> No	


Conditions of Use (Either unit system may be used.)

Mass of work and table (kg)			
Operating orientation	<input type="checkbox"/> Horizontal	<input type="checkbox"/> Vertical	<input type="checkbox"/> Wall installation
Maximum table speed (mm/s)		Maximum table stroke (mm)	
Expected life (h)			

Operating conditions

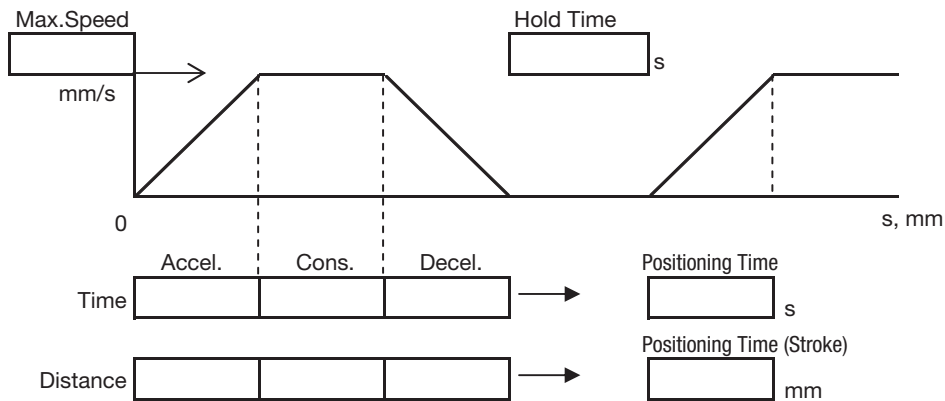

Load distribution (see below)	X =	mm	Y =	mm	Z =	mm
-------------------------------	-----	----	-----	----	-----	----

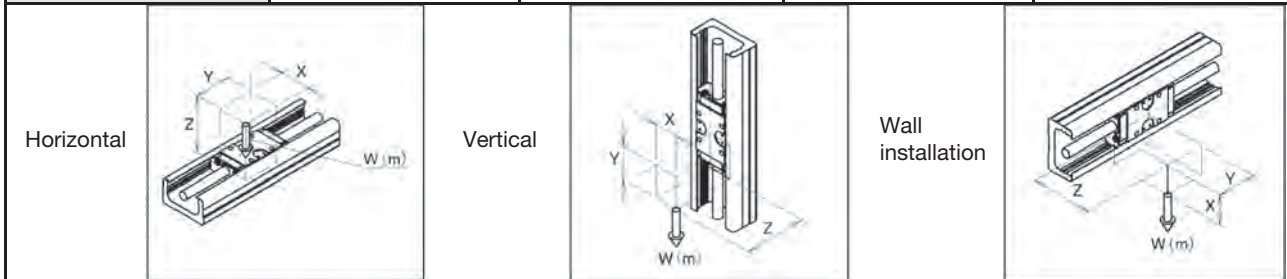

Grease (brand) / Unless otherwise specified, Multemp PS No. 2 Grease (KYODO YUSHI CO.,LTD.) will be used as lubricant.

Environmental conditions	Temp.	Dust	Humidity	Gas	Liquid	Clean room	Vacuum	Others
Name of motor					Parallel motor mounting	<input type="checkbox"/> Required	<input type="checkbox"/> Not required	
Actuator quantity per a machine					Quantity for prototype			
Quantity of mass production					Change control	<input type="checkbox"/> Yes	<input type="checkbox"/> No	

Ball screw actuator specifications

Size		Lead		Slide block		Guide rail length		Precision grade	
Dust-preventive cover		Sensor	Type:		Qty:		Surface treatment		

Additional description / request

*KURODA office	*Contact personnel

BALLSCREW ACTUATOR LUBSEAL

Lubrication Unit for Ballscrew Actuator


SE23 SE30 SE45 SC23 SC30 SC45

LUBSEAL is a lubrication unit which supplies a proper volume of grease to a ballscrew actuator. It contacts grooves on screw shaft and ball rolling point on guide rail. It also fits into both ends of a slide block in a ballscrew actuator compactly. Suitable for semiconductor/liquid crystal manufacturing machines, machine tools and automobile production facilities.

FEATURES

- Simple, neat, and compact
- Remarkably extends maintenance period
- Clean and gently for the environment


STRUCTURE

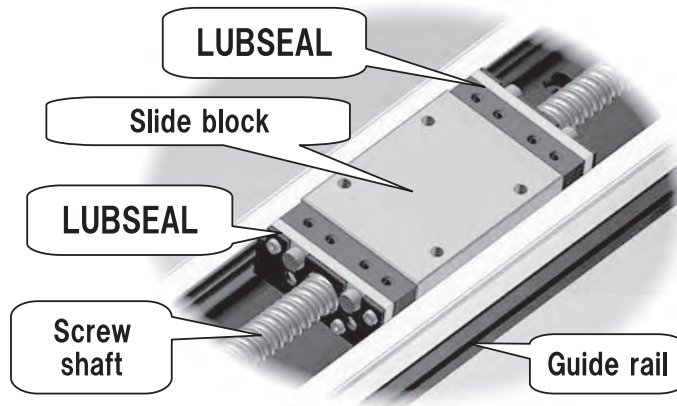

ENDURANCE TEST

■ **With LUBSEAL**
(Lubricating grease is filled only at the early operation stage.)

■ **No lubrication**
(No lubricating grease is filled.)

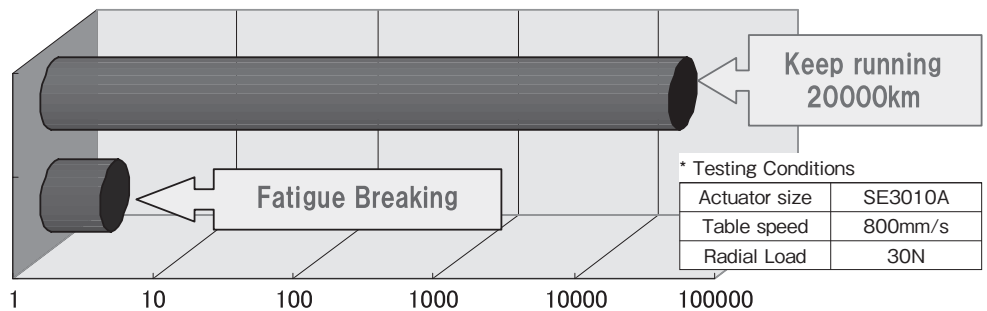

* Testing Conditions

Actuator size	SE3010A
Table speed	800mm/s
Radial Load	30N

Lineup

(Unit: mm)

Series	Model No.	Lead	Type of Slide Block	Applicable Guide Rail length (*)
SE	SE23	2, 5	Long Block	200-300
	SE30	4, 5, 10		200-750
	SE45	5, 10, 20	Long Block, Short Block	540-940
SC	SC23	2, 5	Long Block	200-300
	SC30	4, 5, 10		200-750
	SC45	5, 10, 20		540-940

* Because LUBSEAL are attached on both ends of a slide block, guide rail length is limited.

HOW TO INTERPRET MODEL NO.

SE series

Model NO.	Lead	Slide block	Guide rail length	Performance grade	Mortor bracket configuration	Type of cover	Sensor	Surface treatment	Grease	Dowel pin hole
SE30	10	E	500	W	A0	C	C	N	N	PS

↓
 E: With 1 long block
 F: With 2 long blocks
 G: With 1 short block
 H: With 2 short blocks

* To confirm variety of slide blocks, refer to the below-figure.

SC series

Model NO.	Lead	Slide block	Guide rail length	Performance grade	Mortor bracket configuration	Type of cover	Sensor	Surface treatment	Grease
SC30	10	E	500	W	A0	N	C	N	N

↓
 E: With 1 long block

Maximum stroke and minimum stroke

(Unit: mm)

Model NO.	Guide rail length	Lubrication unit with LUBSEAL					
		Maximum stroke				Minimum stroke *2	
		Long slide block		Short slide block		Long slide block	Short slide block
		E: 1 pc	F: 2 pcs	G: 1 pc	H: 2 pcs	E: 1pc, F: 2pcs	G: 1pc, H: 2pcs
SE23	200	120	-	-	-	75	-
	250	170	95	-	-		
	300	220	145	-	-		
SE30 *1	200	104	-	-	-	91	-
	300	204	114	-	-		
	400	304	214	-	-		
	500	404	314	-	-		
	600	504	414	-	-		
	700	604	514	-	-		
SE45	540	411	288	441	348	123	93
	640	511	388	541	448		
	740	611	488	641	548		
	840	711	588	741	648		
	940	811	688	841	748		
SC23	200	110	-	-	-	75	-
	250	160	-	-	-		
	300	210	-	-	-		
SC30 *1	200	94	-	-	-	91	-
	300	194	-	-	-		
	400	294	-	-	-		
	500	394	-	-	-		
	600	494	-	-	-		
	700	594	-	-	-		
SC45	540	407	-	-	-	123	-
	640	507	-	-	-		
	740	607	-	-	-		
	840	707	-	-	-		
	940	807	-	-	-		

Dash (-) in the above table means the configuration is not available.

*1 Guide rail length 750mm for SE30 or SC30 is applied only to a 10mm lead-actuator.

*2 To use the length under minimum stroke, consult KURODA.

⚠ Operating Cautions

1. Operating temperature range is limited under 50 °C. For operating temperature exceeding 50 °C, consult KURODA.
2. Do not use organic solvent or kerosene.
3. In the case of anti-corrosive black coating specification, the coating film may be peeled off on the point of LUBSEAL contact.
4. Lubrication for SE series: To lubricate grooves on guide rail, pour grease for grease nipple. To lubricate screw shaft, apply grease to the shaft.
5. Lubrication for SC series: pour grease for central grease filler hole.