
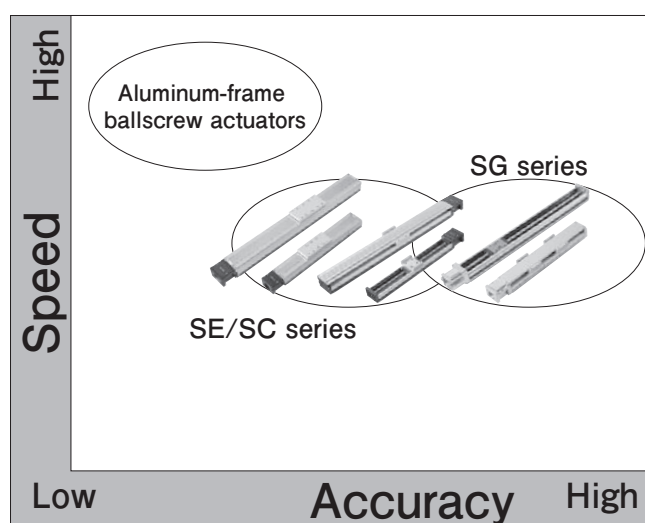


BALLSCREW ACTUATORS

A ballscrew actuator of KURODA is a compact single-axis unit consisting of a ball screw and a slide guide. With its slide block set in U-guide rail, the actuator has achieved low-profile design and compact shape, making it possible to considerably reduce necessary space as compared with the usual table type structure. Despite of its compact structure, the actuator with U-guide rail shows high rigidity against bending moment and deflection, and it can be applied to a structure supported by one end. The linear motion unit, which is gothic arched and in 4 points-contact structure, makes it possible to deliver high precision and high rigidity.

POSITIONS OF BALLSCREW ACTUATORS

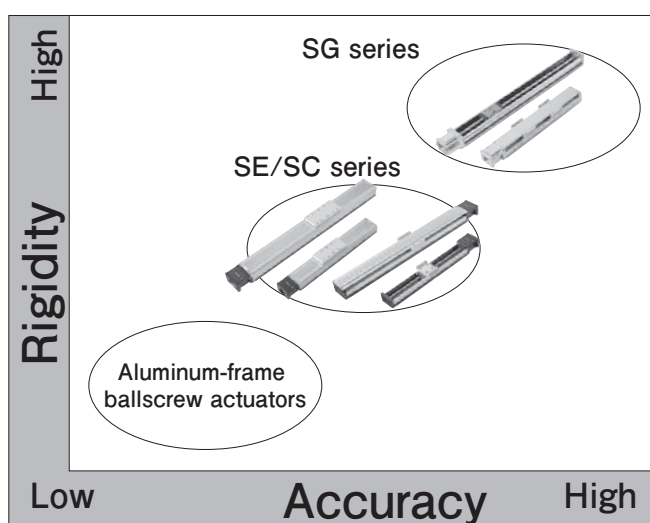

WIDE VARIATIONS

Model No.		SG series						SE series				SC series (Note 2)		
		SG20	SG26	SG33	SG3320	SG46	SG55	SE15	SE23	SE30	SE45	SC23	SC30	SC45
Performance grade (Note 1)		P: Repeated positioning accuracy $\pm 1\mu\text{m}$ H: Repeated positioning accuracy $\pm 3\mu\text{m}$						H: Repeated positioning accuracy $\pm 3\mu\text{m}$ (Note 3) U: Repeated positioning accuracy $\pm 5\mu\text{m}$ W: Repeated positioning accuracy $\pm 10\mu\text{m}$						
Screw shaft dia. (mm)		6	8	10	12	15	20	6	8	10	15	8	10	15
Lead (mm)	1	◎						◎						
	2		◎	●				◎	◎	●		◎	●	
	4								●	◎		●	◎	
	5	◎	◎	◎		●	●		◎	◎	◎	◎	◎	◎
	6									◎			◎	
	8								●			●		
	10			◎		◎	●			◎	◎		◎	◎
	20				◎	◎	◎			◎	◎		◎	◎

◎:In-stock items ●:Manufactured by order

(Note 1) The above table shows precision information on repeated positioning accuracy in particular, as an example. Performance of actuators may be different from the values shown above, depending on applied options and usage. For other precision information, refer to description pages for each series.


(Note 2) SC series is a full-cover version of SE series ballscrew actuators. For more information, refer to Front matters 5 to 6, and pages 99 to 121.

(Note 3) There is no Performance Grade H in SE30 and SC30 leads 6mm and 20mm.

FEATURES OF SG/SE SERIES

■ No necessity for adjustment

Ball screw and slide guide are integrated in ballscrew actuator, eliminating the need for complicated fine adjustment and reducing the number of working processes to a great extent.

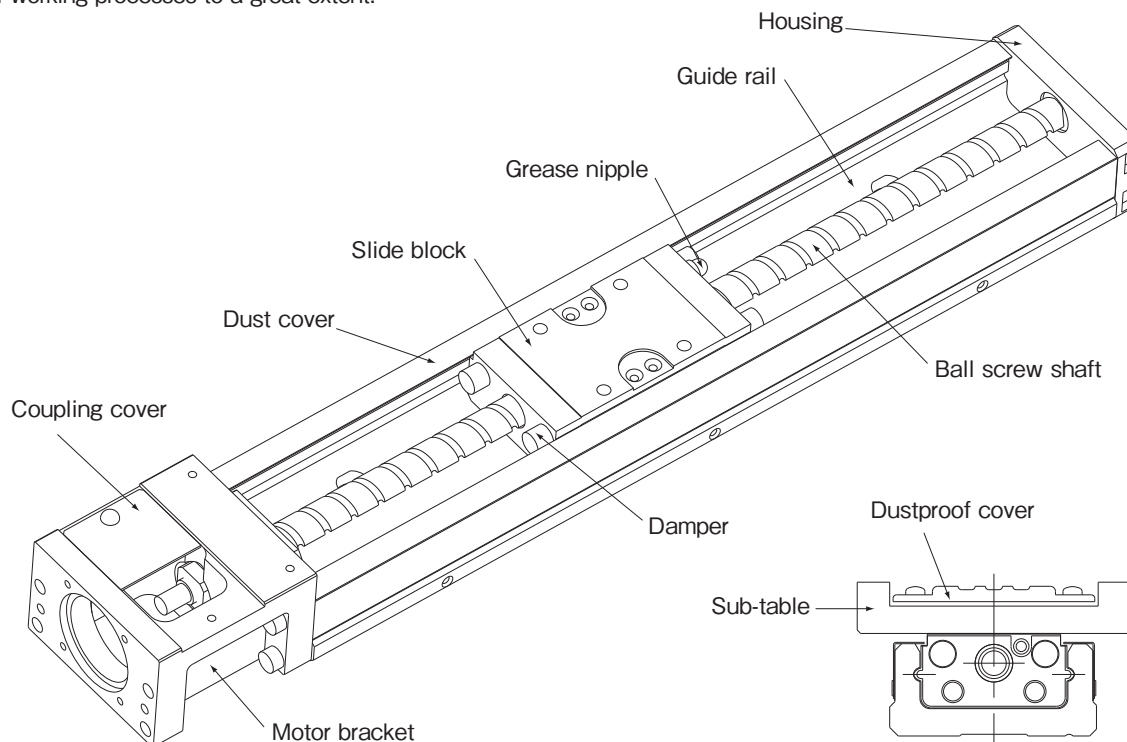


■ High rigidity

With U-guide rail, rigidity of ballscrew actuator has remarkably improved despite of its compact structure, making it possible to be applied even to a structure supported at only one end.



■ High accuracy

Linear motion unit uses "4 or 2 Ballway of 4 points-contact" structure to assure high rigidity. Guide rail, slide block and ball screw shaft are precisely worked, making accurate positioning possible.

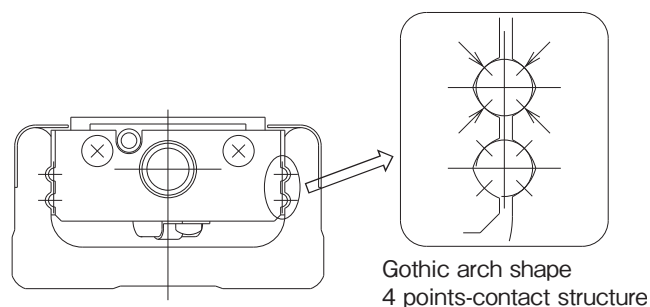


■ Space-saving

With its slide block set in U-guide rail, the actuator has achieved low-profile design and compact shape, making it possible to considerably reduce necessary space as compared with usual table type structure.

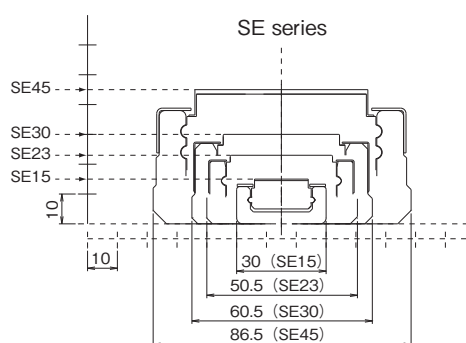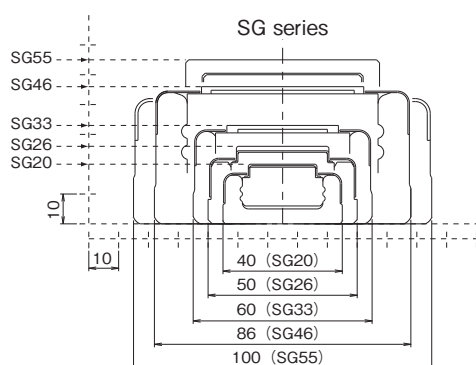

(Unit: mm)

KEY COMPONENTS AND MATERIALS OF SG AND SE SERIES

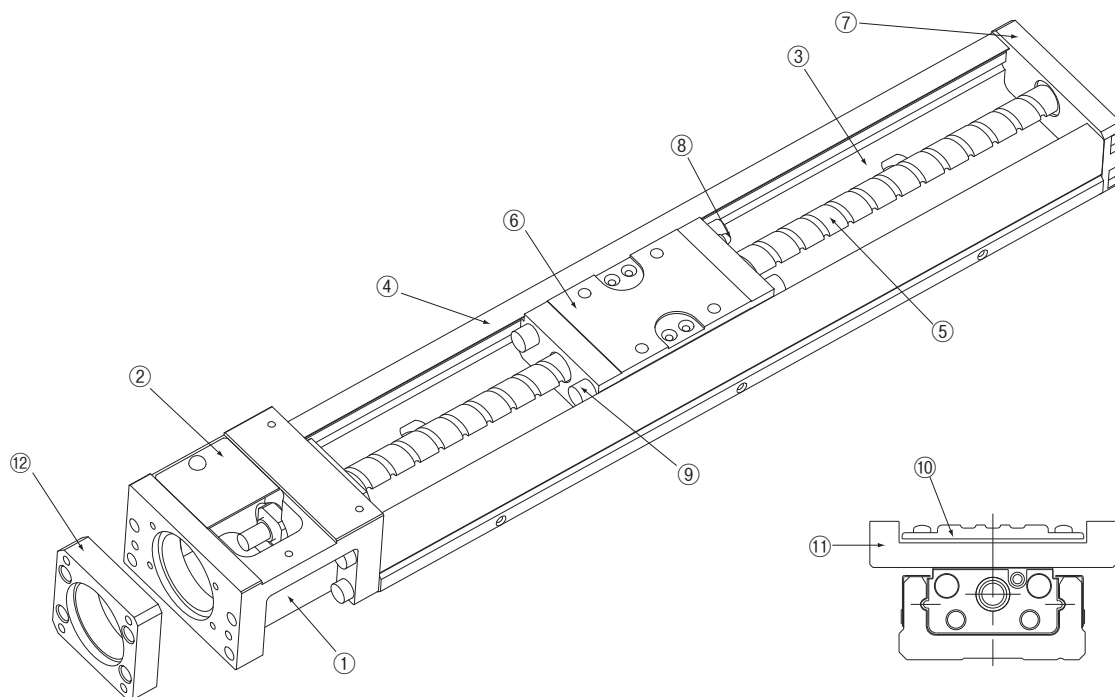


No.	Part name	Material	Remarks
①	Motor bracket	Aluminum alloy	Anodized treatment or baking finish
②	Coupling cover	Aluminum alloy	Anodized treatment
③	Guide rail	Stainless steel (SG20, SG26) Carbon steel (SG33, SG46, SG55, SE15, SE23, SE30, SE45)	Black coating (Note 1)
④	Dust cover	Aluminum alloy	Anodized treatment
⑤	Ball screw shaft	Chromium-molybdenum steel (SG series) Carbon steel (SE series)	
⑥	Slide block	Chromium-molybdenum steel	
⑦	Housing	Aluminum alloy	Anodized treatment or baking finish
⑧	Grease nipple	Stainless steel	
⑨	Damper (Note 2)	Synthetic rubber	
⑩	Dustproof cover	Aluminum alloy	Anodized treatment
⑪	Sub-table	Aluminum alloy	Anodized treatment
⑫	Intermediate flange	Aluminum alloy (SG20, SG26, SE15, SE23, SE30, SE45) Carbon steel (SG33, SG46, SG55)	Anodized treatment Black coating

(Note 1) Guide rails made from stainless steel are not surface-treated.

(Note 2) Damper position of SG series is different from SE series. For more information, refer to dimensions of each series.

(Note 3) Stainless steel is used for bolts and machine screws to joint components of actuator.

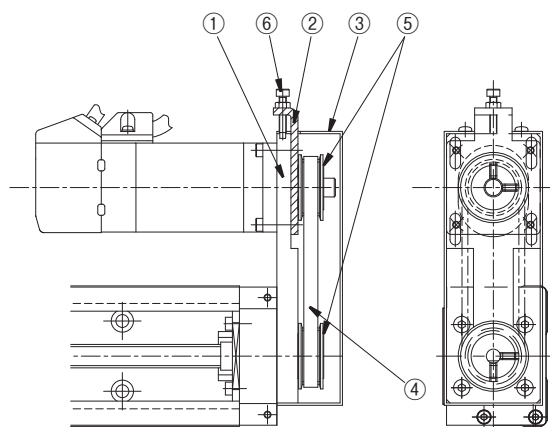

No.	Part name	Material	Remarks
①	Motor mounting plate	Rolled steel	Black coating
②	Tension plate	Stainless steel	
③	Pulley cover	Stainless steel (SG series) Cold-rolled steel plate (SE/SC series)	Anti corrosive black coating (Note 4)
④	Timing belt	Resin	
⑤	Timing pulley	Aluminum alloy	
⑥	Tension bolt	Stainless steel	


(Note 4) Anti corrosive black coating of pulley cover applies to SE and SC series.

VARIATIONS OF SLIDE BLOCK

Two types of actuator with long block and short block are available. Additional types with either 2 long blocks or 2 short blocks are also available. Appropriate type can be selected from the variations according to your purpose of use.

● With 1 long block: A

Applied to SG, SE, and SC series.

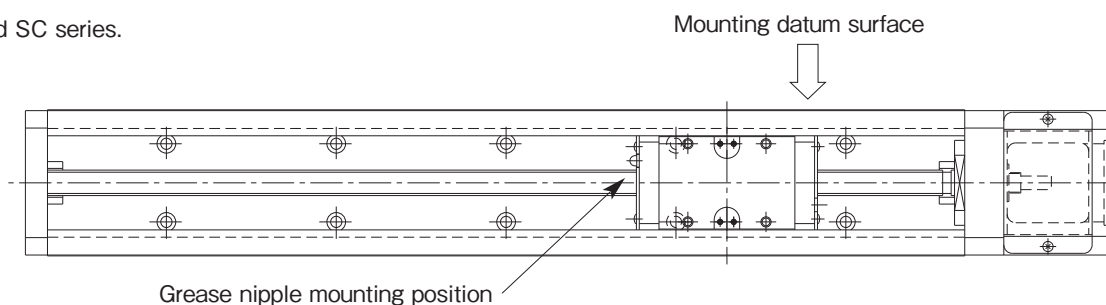


● With 2 long blocks: B

Applied to SG and SE series. (Not available for SC series.)

This configuration may not be applicable depending on guide rail length.

For more information, refer to dimensions of each series.

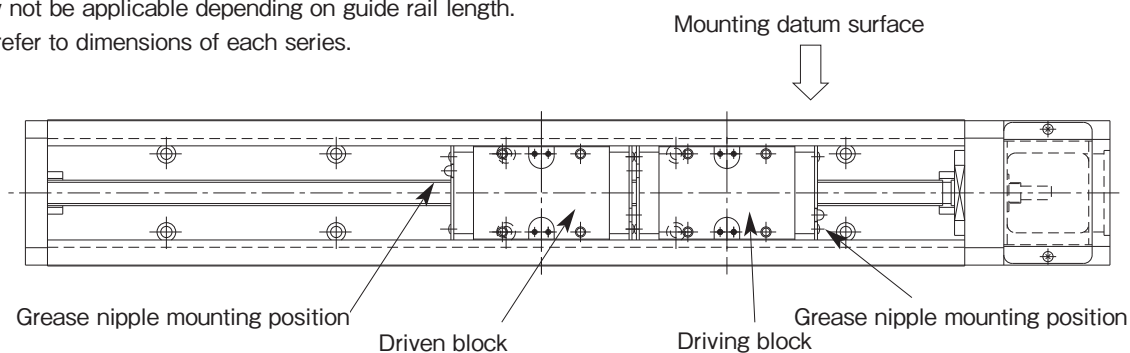


● With 1 short block: C

Applicable size in SE series: SE45

Applicable size in SG series: SG33, SG46

(Not available in SC series.)

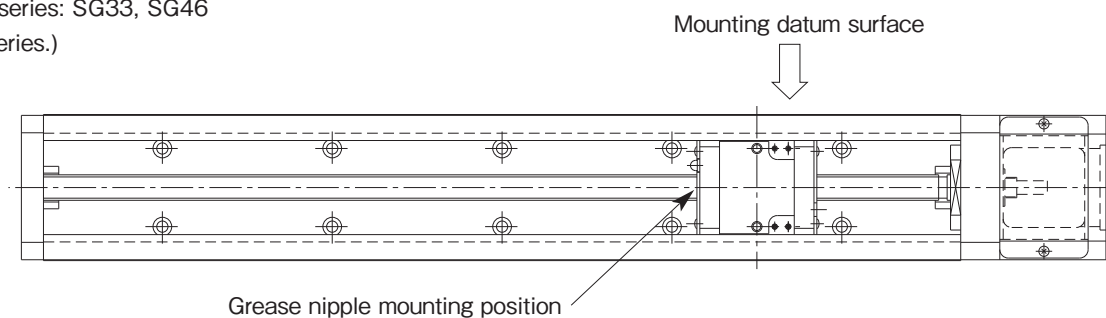


● With 2 short blocks: D

Applicable size in SE series: SE45

Applicable size in SG series: SG33, SG46

(Not available in SC series.)

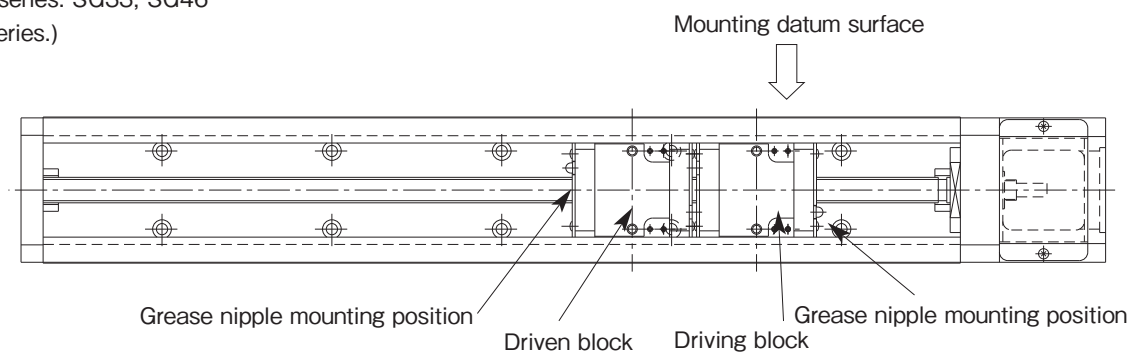

SUMMARY OF ACCURACY INDICATORS

Performance of ballscrew actuators are shown using various accuracy indicators described below.


For details in tolerance of the accuracy indicators, refer to table of performance (accuracy) information for each series.

● Repeated positioning accuracy

Repeat positioning of slide block in the same direction 7 times, measure stop position of slide block and halve maximum difference between obtained readings. Perform this measurement at the center and both ends of travel distance. Maximum value among obtained value is used as measured value.

Repeated positioning accuracy


$$= \pm 1/2 ((\text{maximum value of } \ell_n) - (\text{minimum value of } \ell_n))$$

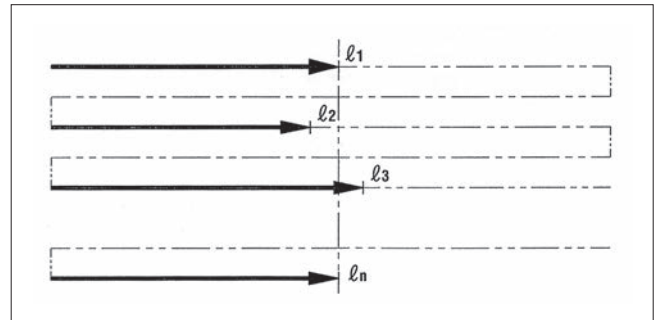

● Positioning accuracy


Position slide block properly in a fixed direction and use the obtained position as datum point. Perform positioning of slide block in the same direction and measure difference between actual traveling distance of slide block from datum point and distance ordered to be traveled from datum point. Perform this measurement throughout stroke range and use maximum value.

$$\text{Positioning accuracy} = (\Delta \ell_n)_{\max}$$

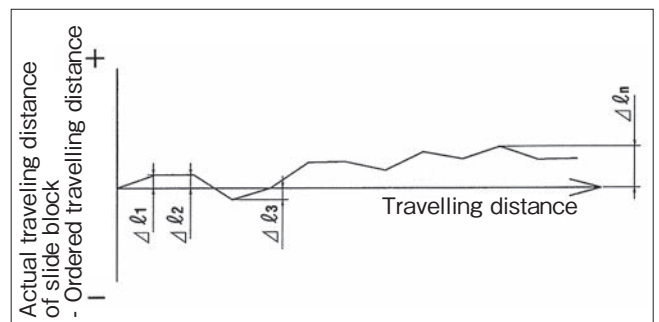

● Traveling parallelism B

Fix indicator at the center of slide block and apply it to surface plate equipped with guide rail. Move slide block throughout traveling distance and use maximum distance among readings of test indicator as measured value.

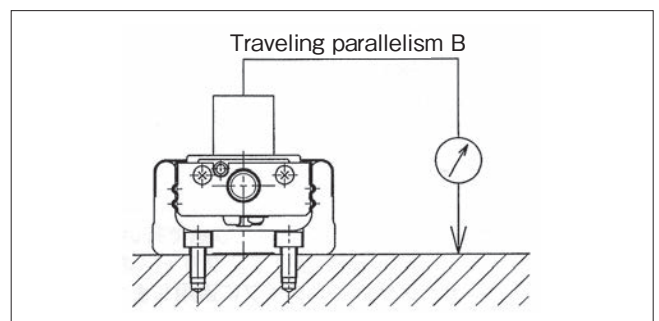

● Backlash


Move slide block by rotating ball screw shaft and read test indicator when slide block is slightly moved and use its reading as reference value. Move slide block from this state in the same direction by pressuring prescribed load and measure difference between reading of test indicator with load removed and reference value. Perform this measurement at the center and both ends of traveling distance and use maximum value as a measured value.

$$\text{Backlash} = \Delta \ell$$



- Firmly tighten the fixed part and connection of the ballscrew actuator.

Improper mounting of the body may adversely affect safety and accuracy depends on the circumstances.

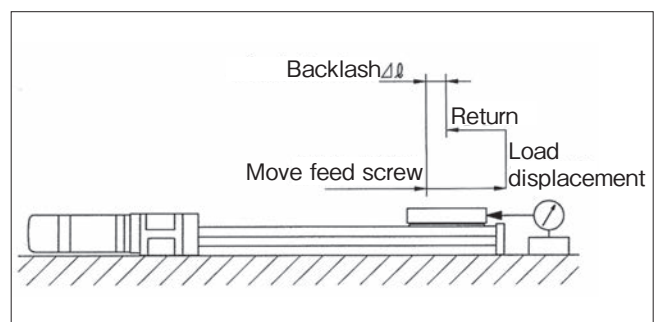


REFERENCE DATA ON ACCURACY

ACCURACY OF UNIT PRODUCT

● Lost Motion


Perform positioning in a positive (or negative) direction and measure the position (Q_1). Move the slide block in the same direction and perform positioning in a negative (or positive) direction and measure the position (Q_1'). Move it further in the same direction and thereafter repeat the procedure in the positive and negative directions seven times each. Obtain the differences of the average values of the stop positions. Conduct this measurement for the entire moving range and use the obtained maximum value as a measured value.

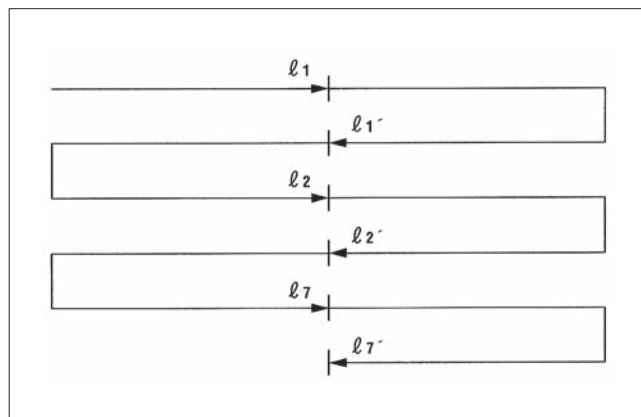

● Traveling Parallelism A


In the case of ballscrew actuators:

Set dial gauge on surface plate, fix indicator on top of slide block, obtain the maximum difference of dial gauge readings in measurable moving range in longitudinal direction of slide block. And use it as a measured value. Since the measurable range is small for ballscrew actuators, Traveling Parallelism B is used as the measurement method for all of the cases except for a few exceptions.

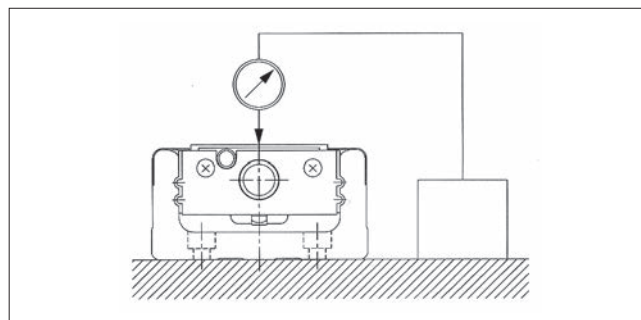

In the case of X-Y stages:

Set dial gauge on surface plate, fix indicator at the center of table, obtain the maximum difference of dial gauge readings in entire moving range in X-Y direction. The maximum difference is used as a measured value.

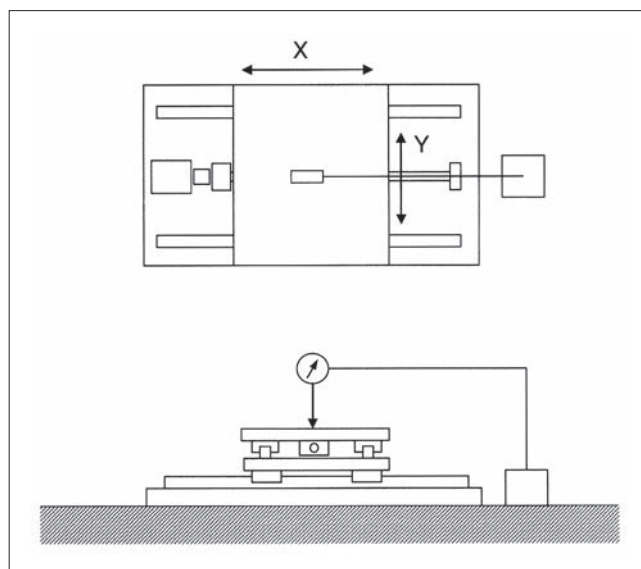

REFERENCE DATA ON ACCURACY


ACCURACY OF UNIT PRODUCT

● Squareness

In case squareness cannot be measured on the table top:

Set a dial gauge on the table top. On surface plate close to the table travel range, fix a square gauge in parallel to X (or Y) travel direction.


Place a fix indicator against the side of square gauge parallel to Y (or X) travel direction. The maximum reading value of the dial gauge in the entire travel range is a measured value of squareness.

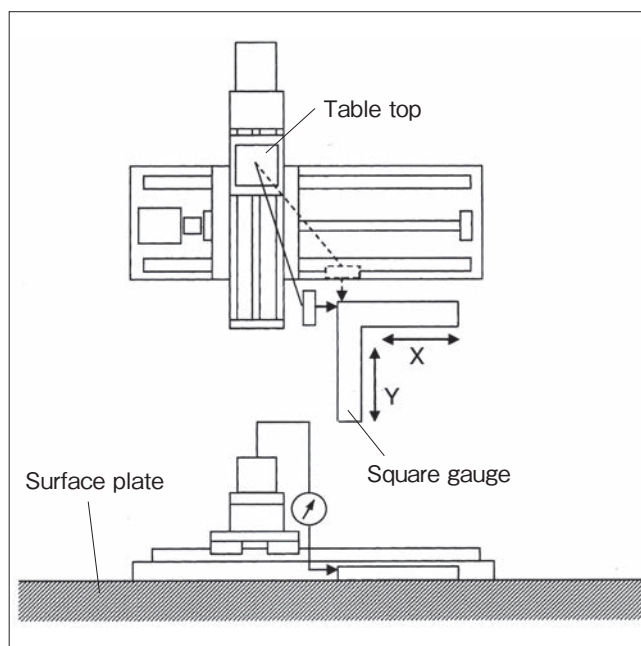

In case squareness can be measured on the table top:


Set a dial gauge on surface plate. On the table top, fix a square gauge in parallel to X (or Y) travel direction.

Place a fix indicator against the side of square gauge parallel to Y (or X) travel direction. The maximum reading value of the dial gauge in the entire travel range is a measured value of squareness.

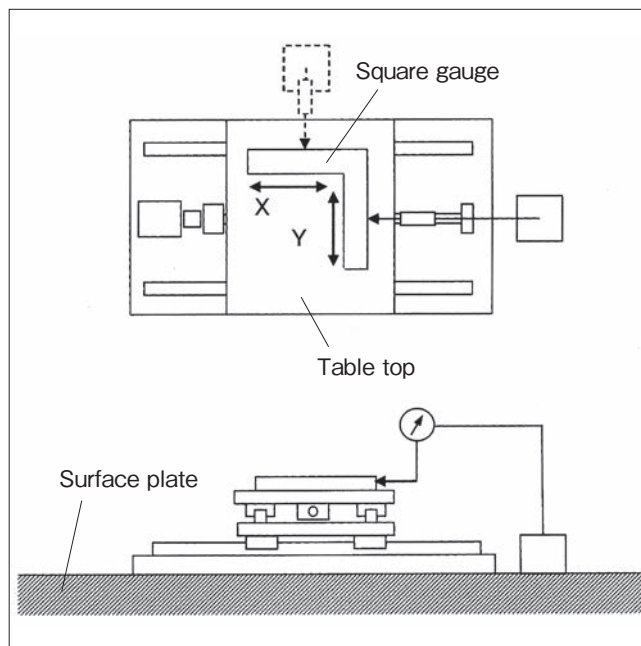


RIGIDITY

Linear motion units of SG, SE, and SC series, having gothic-arched grooves and 4 points-contact structure on guide rails and slide blocks, have attained high rigidity. Displacement by each radial load in each size with long block configuration is shown below as a reference.

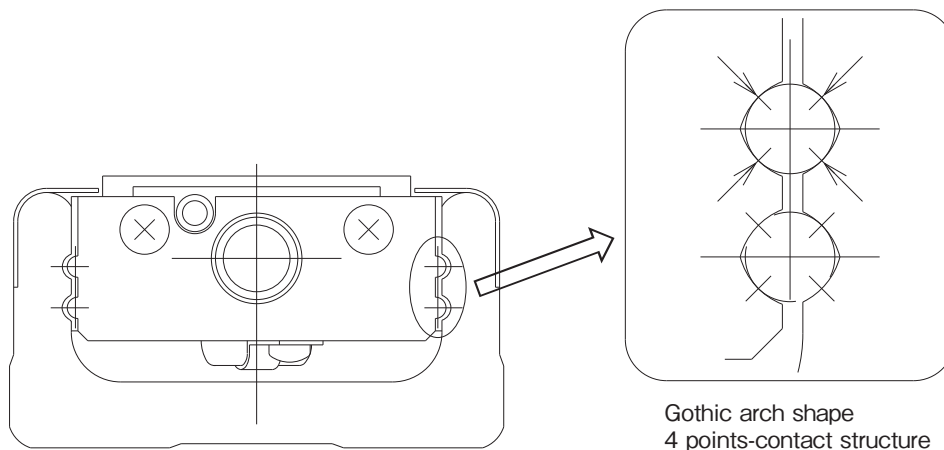


● Displacement of Slide block by Radial Load

SG series

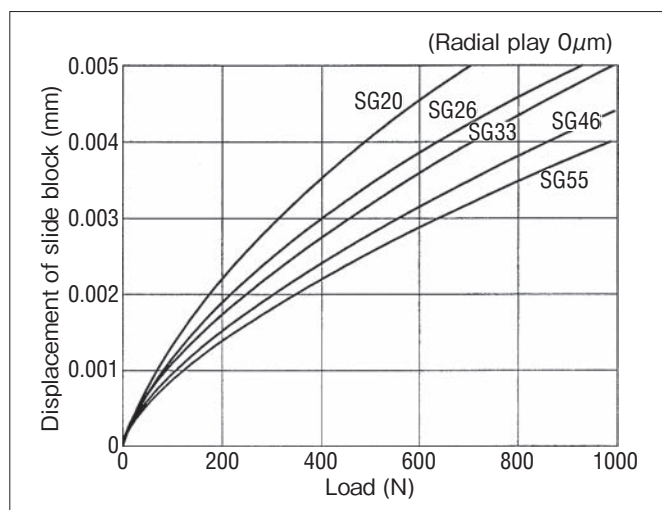


SE/SC series

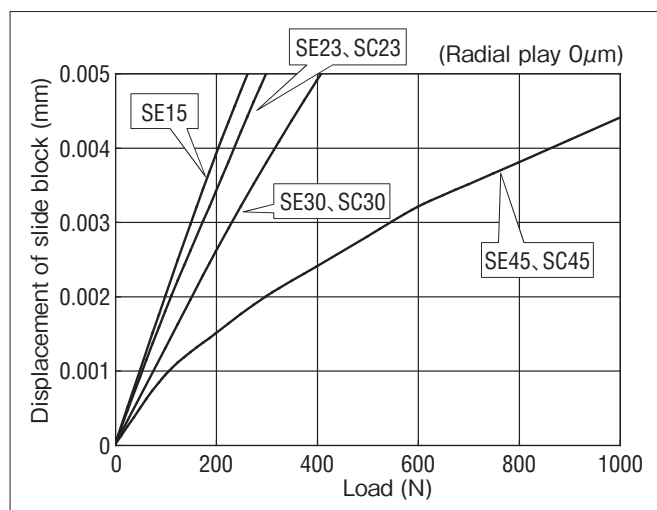

● Sectional Secondary Moment of Guide Rail

The following table shows sectional secondary moments of guide rails in each size.

Model No.	Sectional secondary moments (mm ⁴)		Mass (kg/100mm)
	I _x (X axis)	I _y (Y axis)	
SG20	6.50×10 ³	6.00×10 ⁴	0.250
SG26	1.69×10 ⁴	1.47×10 ⁵	0.380
SG33	5.11×10 ⁴	3.42×10 ⁵	0.600
SG46	2.42×10 ⁵	1.49×10 ⁶	1.240
SG55	2.29×10 ⁵	2.28×10 ⁶	1.500
SE15	2.71×10 ³	2.36×10 ⁴	0.147
SE23, SC23	1.44×10 ⁴	1.37×10 ⁵	0.410
SE30, SC30	3.88×10 ⁴	3.14×10 ⁵	0.560
SE45, SC45	1.45×10 ⁵	1.26×10 ⁶	1.110

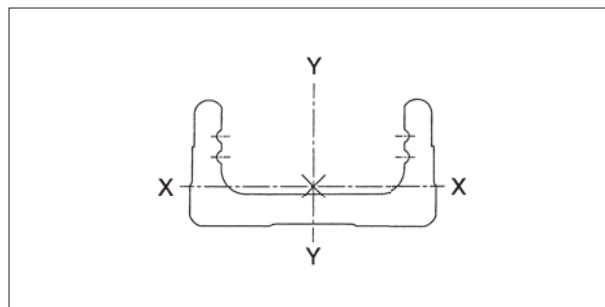

OPTION AND MANUFACTURING BY ORDER

Category	Item		SG series					SE series				SC series		
			SG20	SG26	SG33	SG46	SG55	SE15	SE23	SE30	SE45	SC23	SC30	SC45
Option	Motor bracket configuration	Intermediate flange	○	○	○	○	○	○	○	○	○	○	○	○
		R0/RN type bracket (Note 1)	○	○	○	○	○	—	—	○	○	—	○	○
		Parallel motor mounting unit	—	—	○	○	—	—	—	○	○	—	○	○
	Type of cover	Dustproof cover	○	○	○	○	○	○	○	○	○	—	—	—
		Standard full-cover (Note 2)	—	—	—	—	—	—	—	—	—	○	○	○
		Full-cover with grease nipple (Note 2)	—	—	—	—	—	—	—	—	—	○	○	○
		Full-cover with wiper (Note 2)	—	—	—	—	—	—	—	—	—	○	○	○
		Full-cover with grease nipple and wiper (Note 2)	—	—	—	—	—	—	—	—	—	○	○	○
	Sensor	Photo-microsensor Ass'y	○	○	○	○	○	—	○	○	○	○	○	○
		Proximity sensor Ass'y	○	○	○	○	○	○	○	○	○	○	○	○
	Sensor rail Ass'y		○	○	○	○	○	○	○	○	○	○	○	○
	Surface treatment (Note 3)		○	○	○	○	○	○	○	○	○	○	○	○
	Dust preventive grease		○	○	○	○	○	○	○	○	○	○	○	○
	Dowel pin hole (slide block)		○	○	○	○	○	—	○	○	○	—	—	—
	Dowel pin hole (guide rail)		○	○	○	○	○	—	○	○	○	○	○	○
	Lubrication unit LUBSEAL™		—	—	—	—	—	—	○	○	○	○	○	○
	Reversed guide rail reference surface		—	—	—	—	—	○	○	○	○	○	○	○
	Sub guide rail		—	—	—	—	—	○	○	○	○	○	○	○
Manufactured by order (Note 8)	Intermediate stroke		●	●	●	●	●	●	●	●	●	●	●	●
	Oil hole (Note 4)		●	●	●	●	●	—	●	●	●	—	—	—
	XY bracket		●	●	●	●	●	●	●	●	●	●	●	●
	Motor assembling		●	●	●	●	●	●	●	●	●	●	●	●
	Long rail configuration		●	●	●	●	—	●	●	●	●	●	●	●
	Grease options (Note 5)		●	●	●	●	●	●	●	●	●	●	●	●
	Motor bracket configuration (Note 6)		●	●	●	●	●	●	●	●	●	●	●	●
	Sensor options (Note 7)		●	●	●	●	●	●	●	●	●	●	●	●

○: Option —: Not available ●: Manufactured by order

(Note 1) R0 type bracket is applied to SG series and RN type is applied to SE and SC series.

(Note 2) Full-cover type with wiper and with grease nipple is applied only to SC series.

(Note 3) Anti corrosive black coating (film thickness 1-2μm) is provided as surface treatment.

(Note 4) Oil hole for SG and SE series is applied to the configuration with sub-table.

(Note 5) Any grease application other than standard or option grease applications will be provided on a manufactured by order basis.

(Note 6) Ballscrew actuator with motor bracket or intermediate flange configuration other than standard or option configuration will be provided on a manufactured by order basis.

(Note 7) Ballscrew actuator requiring a sensor other than option configuration or two sensors attached on both ends will be provided on a manufactured by order basis.

(Note 8) For ballscrew actuators to be provided on a manufactured by order basis, specifications will be determined after consultation with customers. Please consult KURODA after completing the Specification Data Sheet attached at the end of this catalog.

HOW TO INTERPRET MODEL NO.

Model No.	Lead	Slide block	Guide rail length	Performance grade	Motor bracket configuration	Type of cover	Sensor	Surface treatment	Grease	Dowel pin hole
SG33	10	A	500	P	A1	C	C	N	N	PS
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪
Model No. of Main Body					Model No. of Option					

① Model of ballscrew actuator

The 2-digits number represents height of mounting surface, from the bottom face of guide rail to top face of slide block.
(For SG/SE series with dustproof cover and SC series, Model No. of the unit used as base of the body is shown.)

SG series	SG20	SG26	SG33	SG46	SG55
SE series	SE15	SE23	SE30	SE45	
SC series	SC23	SC30	SC45		

② Lead of ball screw

Permissible speed varies depending on the lead. For more information, refer to dimensions of each series.

Lead	SG series					SE series				SC series		
	SG20	SG26	SG33	SG46	SG55	SE15	SE23	SE30	SE45	SC23	SC30	SC45
1mm	○					○						
2mm		○				○	○			○		
4mm								○			○	
5mm	○	○	○				○	○	○	○	○	○
6mm								○			○	
10mm			○	○				○	○		○	○
20mm			○	○	○			○	○		○	○

③ Variation of slide blocks and number of blocks to be mounted

For configuration with 2 slide blocks, a driving block and driven block in combination is mounted. For more information, refer to dimensions of each series.

④ Guide rail length

For more information, refer to dimensions of each series. Please note that the guide rail length is different from overall length or maximum stroke length of actuator.

Model No.	Standard guide rail length										
SE15	100	150	200								
SE23	150	200	250	300							
SE30	150	200	300	400	500	600	700	750 ^(Note 2)			
SE45	340	440	540	640	740	840	940				
SC23	150	200	250	300							
SC30	150	200	300	400	500	600	700	750 ^(Note 2)			
SC45	540	640	740	840	940						
SG20	100	150	200								
SG26	150	200	250	300							
SG33	150	200	300	400	500	600 ^(Note 1)					
SG46	340	440	540	640	740	840 ^(Note 1)	940 ^(Note 1)	1040 ^(Note 1)	1140 ^(Note 1)	1240 ^(Note 1)	
SG55	980	1080	1180	1280 ^(Note 1)	1380 ^(Note 1)						

(Note 1) Only available in Performance Grade H.

(Note 2) Guide rail length 750mm for SE30 and SC30 is only available in lead 10mm.

⑤ Performance of ballscrew actuators, including various positioning accuracy indicators and traveling parallelism

For more information on accuracy, refer to a table of accuracy information for each series.

⑥ Motor bracket configuration

Intermediate flange may be used in combination with basic configuration. For more information, refer to a table of motor bracket configurations and motor option for each series.

⑦ Type of cover

For more information, refer to dimensions of each series.

⑧ With or without sensor / type of sensor

For more information, refer to dimensions of each series.

⑨ With or without surface treatment applied on guide rails and ball screws

With standard specifications (Symbol N), only guide rails are treated with black coating (except for guide rails made from stainless steel).

⑩ Type of grease applied on slide blocks and ball screws of ballscrew actuators

With standard specifications, Multemp PS No.2 Grease (KYODO YUSHI CO., LTD.) is contained.

⑪ Additional options such as reversed reference surface and dowel pin holes

Left blank when additional options are not included.

BALLSCREW ACTUATOR LUBSEAL™

Lubrication Unit for Ballscrew Actuator


SE23 SE30 SE45 SC23 SC30 SC45

LUBSEAL is a lubrication unit which supplies a proper volume of grease to a ballscrew actuator. It contacts grooves on screw shaft and ball rolling point on guide rail. It also fits into both ends of a slide block in a ballscrew actuator compactly. Suitable for semiconductor/liquid crystal manufacturing machines, machine tools and automobile production facilities.


FEATURES

- Simple, neat, and compact
- Remarkably extends maintenance period
- Clean and gently for the environment

STRUCTURE

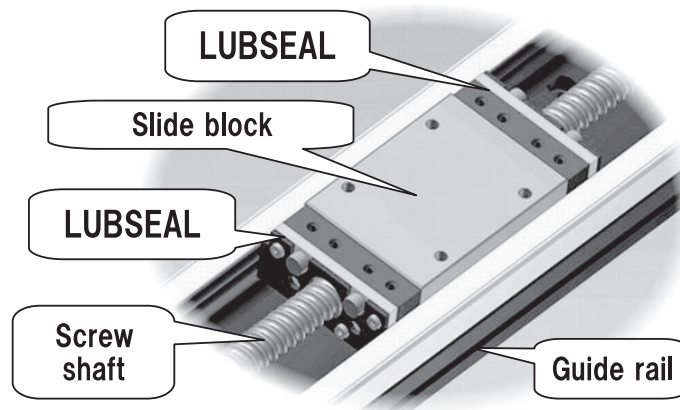

ENDURANCE TEST

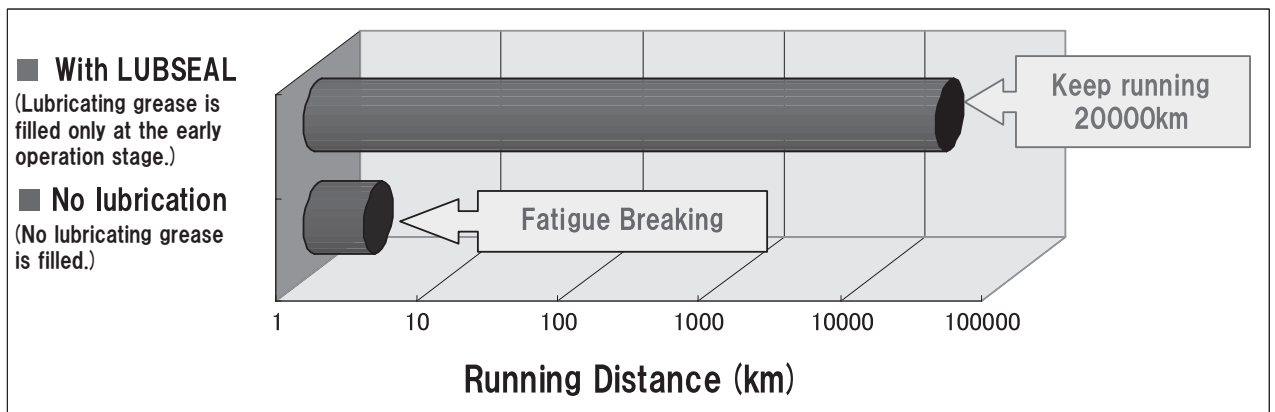

Lineup

(Unit: mm)

Series	Model No.	Lead	Type of Slide Block	Applicable Guide Rail length (*)
SE	SE23	2, 5	Long Block	200 - 300
	SE30	4, 5, 10		200 - 750
	SE45	5, 10, 20	Long Block, Short Block	340 - 940
SC	SC23	2, 5	Long Block	200 - 300
	SC30	4, 5, 10		200 - 750
	SC45	5, 10, 20		540 - 940

* Because LUBSEAL are attached on both ends of a slide block, guide rail length is limited.

HOW TO INTERPRET MODEL NO.

SE series

Model NO.	Lead	Slide block	Guide rail length	Performance grade	Mortor bracket configuration	Type of cover	Sensor	Surface treatment	Grease	Dowel pin hole
SE30	10	E	500	W	AO	C	C	N	N	PS

↓
 E: With 1 long block
 F: With 2 long blocks
 G: With 1 short block
 H: With 2 short blocks

* To confirm variety of slide blocks, refer to the below-figure.

SC series

Model NO.	Lead	Slide block	Guide rail length	Performance grade	Mortor bracket configuration	Type of cover	Sensor	Surface treatment	Grease
SC30	10	E	500	W	AO	N	C	N	N

↓
 E: With 1 long block

Maximum stroke and minimum stroke

(Unit: mm)

Model NO.	Guide rail length	Lubrication unit with LUBSEAL					
		Maximum stroke				Minimum stroke *2	
		Long slide block		Short slide block		Long slide block	Short slide block
		E: 1 pc	F: 2 pcs	G: 1 pc	H: 2 pcs	E: 1pc, F: 2pcs	G: 1pc, H: 2pcs
SE23	200	120	-	-	-	75	-
	250	170	95	-	-		
	300	220	145	-	-		
SE30 *1	200	104	-	-	-	91	-
	300	204	114	-	-		
	400	304	214	-	-		
	500	404	314	-	-		
	600	504	414	-	-		
	700	604	514	-	-		
	750	654	564	-	-		
SE45	340	211	-	241	148	123	93
	440	311	188	341	248		
	540	411	288	441	348		
	640	511	388	541	448		
	740	611	488	641	548		
	840	711	588	741	648		
	940	811	688	841	748		
SC23	200	110	-	-	-	75	-
	250	160	-	-	-		
	300	210	-	-	-		
SC30 *1	200	94	-	-	-	91	-
	300	194	-	-	-		
	400	294	-	-	-		
	500	394	-	-	-		
	600	494	-	-	-		
	700	594	-	-	-		
	750	644	-	-	-		
SC45	540	407	-	-	-	123	-
	640	507	-	-	-		
	740	607	-	-	-		
	840	707	-	-	-		
	940	807	-	-	-		

Dash (-) in the above table means the configuration is not available.

*1 Guide rail length 750mm for SE30 or SC30 is applied only to a 10mm lead-actuator.

*2 To use the length under minimum stroke, consult KURODA.

⚠ Operating Cautions

1. Operating temperature range is limited under 50 °C. For operating temperature exceeding 50 °C, consult KURODA.
2. Do not use organic solvent or kerosene.
3. In the case of anti-corrosive black coating specification, the coating film may be peeled off on the point of LUBSEAL contact.
4. Lubrication for SE series: To lubricate grooves on guide rail, pour grease for grease nipple. To lubricate screw shaft, apply grease to the shaft.
5. Lubrication for SC series: pour grease for central grease filler hole.






FOR SAFETY USE

Be sure to read the following instructions before use.
For common instructions, refer to the text of this catalog.

The following safety precautions recommend the correct usage of our products to prevent an injury and a damage.

These precautions are classified into 3 categories : "DANGER", "WARNING" and "CAUTION" according to the degree of possible injury or damage and the degree of impendence of such injury or damage.

Be sure to follow all these precautions, as they include important contents regarding safety.

 DANGER	 WARNING	 CAUTION
Indicates an impending hazardous situation that may arise due to improper handling or operation and could result in a serious injury or death.	Indicates a potentially hazardous situation that may arise due to improper handling or operation and could result in a serious injury or death.	Indicates a potentially hazardous situation that may arise due to improper handling or operation and could result in an injury or property damage only.

Be sure to obey "Labor Safety and Sanitation Law" and other safety rules and regulations in addition to these precautions.

There is some situation that may lead to a serious result according to circumstances, even if it is mentioned in the category of "CAUTION". Be sure to follow these precautions, as they contain important matters.



WARNING

- **Select a ballscrew actuator properly.**

As operating conditions for products mentioned in this catalog are diversified, the applicability of ballscrew actuator to the intended system should be determined by the total system designer or the person who determined specifications for such system after conducting an analysis and testing as necessary.

The person who determined the applicability of the system shall be responsible for assuring the intended system performance and safety. When configuring a system, the system designer should thoroughly examine all specifications for such a system by referring to the latest product catalog and data, and also take into consideration the possibility of equipment troubles.

- **The ballscrew actuator should be handled by persons who have sufficient knowledge and rich experience.**

Thoroughly read this catalog and operation manual before use.

- Never disassemble the ballscrew actuator. Dust can enter the inside, degrading the accuracy of the module and causing an accident. When the ballscrew actuator has been disassembled from necessity, return it to our company for repair and reassembling. (In this case, repairing charges are required.)
- When mounting a ballscrew actuator to a machine and dismantling it from machine, check that a fall prevention means has been taken and the moving part of the machine has been fixed beforehand.

- **When using the ballscrew actuator in the following conditions or environments, take the proper safety measures and consult KURODA beforehand.**

- Conditions and environments other than specified and outdoor use.
- Applications to nuclear power equipment, railroads aircraft, vehicles, medical equipment, equipment connected with food and drink, and the likes.
- Applications which require extreme safety and will also greatly affect men and property.

- **During operation, make sure to keep your hands away from either of stroke ends, where slide block moves, to prevent your finger from being caught.**

- **During operation, make sure to keep your hands away from screws and axis terminals of ball screw shaft, which are rotating parts, to prevent your hands from being caught.**

- **Pay adequate attention not to allow the actuators to be used for military purpose including for arms and weapons.**



BALLSCREW ACTUATOR/COMMON INSTRUCTIONS

Be sure to read the following instructions before use.
Also refer to "FOR SAFETY USE".

DESIGN

WARNING

- Especially when there is the possibility that the ballscrew actuator is dangerous to the human body, provide it with a protective cover.

When there is the possibility that the load and the moving part of the ballscrew actuator are dangerous to the human body, design the structure to prevent the human body from touching such load and moving part directly.

- Firmly tighten the fixed part and connection of the ballscrew actuator. Improper mounting of the body may adversely affect safety and accuracy according to circumstances.
- Take into consideration the behavior of the ballscrew actuator in an emergency.

When the machine is immediately stopped in an emergency by a person or by a safety device in case of power failure or system trouble, the motion of the module can injure the human body and can damage the machine. So design the machine to prevent an injury to the human body and a damage to the machine.

SELECTION

WARNING

- Check specifications.
Be sure to use the ballscrew actuator within the given specifications.
- When selecting a rigid type as coupling for connecting a motor, consult KURODA.

MOUNTING

CAUTION

- Be careful not to dent and flow the body and the mounting surface of the table, side cover, and center sheet.

Such dent or flaw will degrade parallelism of mounting surface, resulting in rattling of the guide and increased slide resistance. Note that, since the center sheet of SC series are very thin, such dent or flaw may ruin its dust preventive capability or lead to damage of the sheet function.

- When connecting the ballscrew actuator to a load with an external support or guide, do so in accordance with a proper connecting method and perform centering satisfactorily.
- When mounting a load, do not apply an excessive shock or moment.

If the ballscrew actuator receives external force exceeding the permissible moment, the guide will loosen and sliding resistance will increase.

- Do not start the system until it is confirmed that the ballscrew actuator works properly.

After mounting the ballscrew actuator, perform an appropriate functional test and make sure that it is correctly mounted and works safely without fail before starting the system.

- Although corners of components, such as motor bracket, housing, side cover, and center sheet, are beveled, pay enough attention not to hurt yourself when handling them.

OPERATING ENVIRONMENT

DANGER

- Do not use the ballscrew actuator in a place where an explosive atmosphere exists.

WARNING

- Do not use the ballscrew actuator in an atmosphere containing corrosive gases, chemicals, seawater, water and vapor and in a place where it can be stained with such matters.
- When using the ballscrew actuator in a place where it is exposed to dust, cuttings, spatters, etc., fit a protective cover or other protector.
- Do not use the ballscrew actuator in a vibratory or shockable place ; otherwise causing a bad condition or breakdown.

When using the ballscrew actuator in such an environment, consult KURODA.

CAUTION

- Since the SC series is equipped with sheet magnet on side covers for attracting center sheet to keep its position, be careful not to have the magnet contaminated with iron power or metallic fragments.

LUBRICANTS

CAUTION

- Unless otherwise specified, the nut contains Multemp PS No.2 Grease (KYODO YUSHI CO., LTD.) as a lubricant.

- Checking and supplying lubricant

Check the lubricant 2 to 3 months after the ball screw is used for the first time. If it is extremely dirty, wipe off old grease and apply new grease. Then, check and supply the lubricant once every year as a general rule. However, as the service life of lubricants varies according to operating conditions and environment, adjust the intervals properly.

When feeding additional grease (lubricant), use the same brand of grease as initially contained.

With SC series, a central grease filler hole (M3) is provided on side surface of table, making it possible for the grease to be supplied to ball screw and guide through the filler hole.

Supply additional grease as necessary, preferably with the interval indicated above. When adding grease, 2 dispenses by grease gun (approx. 1 to 2 cc) should be supplied.

After supplying additional grease, operate the table to the extent of full stroke to apply the grease over the component. Wipe off excess grease attached around the central grease filler hole.

- Do not use at high temperature over 60 celsius degree.

As resin is used in ballscrew actuator, use at lower temperature than 60 celsius degree. For ballscrew actuator with sensor, use at lower temperature than 55 celsius degree.

CONTENTS

HIGH RIGIDITY BALLSCREW ACTUATORS/SE SERIES

Variations, Model No.	52
Specifications	53
Accuracy	54
Inertia	55
 SE15 Long block configuration	56
Long block configuration, dimensions, permissible speed and mass	57
Long block sub guide rail configuration	58
Long block sub guide rail configuration, dimensions, permissible speed and mass	59
Motor bracket configuration	60
Motor bracket configuration (intermediate flange)	61
List of motor bracket configurations and motor option	62
Sensors and sensor rails	63
 SE23 Long block configuration	64
Long block configuration, dimensions, permissible speed and mass	65
Long block sub guide rail configuration	66
Long block sub guide rail configuration, dimensions, permissible speed and mass	67
Motor bracket configuration	68
Motor bracket configuration (intermediate flange)	69-70
List of motor bracket configurations and motor option	71
Sensors and sensor rails	72
Dowel pin hole	73
 SE30 Long block configuration	74
Long block configuration, dimensions, permissible speed and mass	75
Long block sub guide rail configuration	76
Long block sub guide rail configuration, dimensions, permissible speed and mass	77
Motor bracket configuration	78
Motor bracket configuration (intermediate flange)	79
List of motor bracket configurations and motor option	80
Parallel motor mounting	81
Sensors and sensor rails	82
Dowel pin hole	83
 SE45 Long block configuration	84
Long block configuration, dimensions, permissible speed and mass	85
Short block configuration	86
Short block configuration, dimensions, permissible speed and mass	87
Long block sub guide rail configuration	88
Long block sub guide rail configuration, dimensions, permissible speed and mass	89
Short block sub guide rail configuration	90
Short block sub guide rail configuration, dimensions, permissible speed and mass	91
Motor bracket configuration	92
Motor bracket configuration (intermediate flange)	93
List of motor bracket configurations and motor option	94
Parallel motor mounting	95
Sensors and sensor rails	96
Dowel pin hole	97
 Sensor specifications - Photo-microsensor S, M, Y	122
Sensor specifications - Proximity sensor K, E	123
Sensor specifications - Photo-microsensor C, P, H, J	124

SG

SG20

SG26

SG33

SG46

SG55

SE

SE15

SE23

SE30

SE45

SC

SC23

SC30

SC45

Sensor

Technical Data

VARIATIONS

Model No.		SE15	SE23	SE30	SE45
Performance grade		H: Repeated positioning accuracy $\pm 3\mu\text{m}$ <small>(Note 1)</small> U: Repeated positioning accuracy $\pm 5\mu\text{m}$ <small>(Note 2)</small> W: Repeated positioning accuracy $\pm 10\mu\text{m}$ <small>(Note 2)</small>			
Screw shaft dia. (mm)		6	8	10	15
Lead (mm)	1	○			
	2	○	○	●	
	4		●	○	
	5		○	○	○
	6			○	
	8		●		
	10			○	○
	20			○	○



○: In-stock items ●: Manufactured by order
 (Note 1) There is no Performance Grade H in SE30 leads 6mm and 20mm.
 (Note 2) Performance may be different from the values shown above, depending on applied options and usage.

HOW TO INTERPRET MODEL NO.

SE30	05	A	-	150	U	-	A1	N	N	-	N	N	-	PS
①	②	③		④	⑤		⑥	⑦	⑧		⑨	⑩		⑪

① Model ② Lead

① Model	② Lead	② Sub guide rail
SE15	1, 2	SB
SE23	2, 5	
SE30	4, 5, 6, 10, 20	
SE45	5, 10, 20	

③ Slide block

Model	Slide block
SE15	A: With 1 long block B: With 2 long blocks
SE23	A: With 1 long block B: With 2 long blocks
SE30	E: With 1 long block (LUBSEAL) F: With 2 long blocks (LUBSEAL)
SE45	A: With 1 long block B: With 2 long blocks C: With 1 short block D: With 2 short blocks E: With 1 long block (LUBSEAL) F: With 2 long blocks (LUBSEAL) G: With 1 short block (LUBSEAL) H: With 2 short blocks (LUBSEAL)

④ Guide rail length (Note 1) (Note 2)

Model	Guide rail length (mm)
SE15	100, 150, 200
SE23	150, 200, 250, 300
SE30	150, 200, 300, 400, 500, 600, 700*, 750*
SE45	340, 440, 540, 640, 740, 840, 940

⑤ Performance grade (Note 3)

H	Repeated positioning accuracy $\pm 3\mu\text{m}$
U	Repeated positioning accuracy $\pm 5\mu\text{m}$
W	Repeated positioning accuracy $\pm 10\mu\text{m}$
L	Sub guide rail

⑥ Motor bracket configuration

Model	Motor bracket configuration	Sub guide rail
SE15	A0, A1, A2, A3	NN
SE23	A0, A1, A2, A3, A5, A6, A7	
SE30	A0, A1, A2, A3, A4, A5, A7, B1, RN, E□, F□	
SE45	A0, A1, A2, A3, A4, A5, A6, RN, E□, F□, G□	

⑦ Type of cover

N	Without cover
C	With cover

⑧ Sensor

Model	Sensor
SE15	N: Without sensor K, E: Proximity sensor 1: For sensor rails only
SE23	N: Without sensor S: Photo-microsensor K, E: Proximity sensor 1: For sensor rails only
SE30	N: Without sensor M, Y, C, P: Photo-microsensor K, E: Proximity sensor 1: For sensor rails only
SE45	K, E: Proximity sensor 1: For sensor rails only

⑨ Surface treatment (Note 4)

N	Standard treatment
L	Anti corrosive black coating

⑩ Grease (Note 5)

Model	Grease
SE15	N: Standard grease S: Dust preventive KURODA S grease
SE23	
SE30	
SE45	

⑪ Additional options (Note 6)

Blank	No dowel pin hole
PS	For slide block only
PR	For guide rail only
PSR	For both slide block and guide rail
ML	For reversed guide rail reference surface
MPS	For both reversed guide rail reference surface and slide block
MPR	For both reversed guide rail reference surface and guide rail
MSR	For reversed guide rail reference surface, slide block and guide rail



(Note 1) For specifications of guide rail with long rails or intermediate stroke with non-standard length, consult KURODA.
 (Note 2) The SE30 rail lengths marked with "*" are not available in Performance Grade H.
 (Note 3) There is no Performance Grade H in SE30 leads 6mm and 20mm.
 (Note 4) With standard specifications of surface treatment (Symbol: N), only guide rails are treated with black coating.
 (Note 5) With standard grease (Symbol: N), Multemp PS No.2 Grease (KYODO YUSHI CO., LTD.) is contained in slide block and ball screw components.
 (Note 6) Dowel pin hole configuration is not available for SE15.
 (Note 7) With Lubrication unit LUBSEAL specifications refer to Front matters 14 to 15.

SPECIFICATIONS

Model No.				SE1501	SE1502	SE2302	SE2305	SE3004	SE3005	SE3006	SE3010	SE3020	SE4505	SE4510	SE4520						
Performance grade				W	U	H	W	U	H	W	U	H	W	U	H	W	U	H	W	U	H
Guide	Radial clearance			μm	—3~0			—3~0			—3~0						—5~0				
	Long block	Basic dynamic load rating	C	kN	1.6			4.3			7						27				
		Basic static load rating	Co	kN	2.7			7.0			11.8						45.0				
		Static permissible moment	N·m	M _P	10			46			101						572				
				M _{2P}	60			276			606						3,432				
				M _Y	11			51			120						681				
				M _{2Y}	71			306			720						4,086				
				M _R	28			134			260						1,410				
				M _{2R}	56			268			520						2,820				
	Short block	Basic dynamic load rating	C	kN	Not available			Not available			Not available						16.9				
		Basic static load rating	Co	kN													28.1				
		Static permissible moment	N·m	M _P													223				
				M _{2P}													1,341				
				M _Y													266				
				M _{2Y}													1,598				
				M _R													887				
				M _{2R}													1,774				
Ball screw	Shaft diameter			mm	6		8		10						15						
	Lead			mm	1	2	2	5	4	5	6	10	20	5	10	20					
	Basic dynamic load rating	Ca	kN	0.39	0.54	1.8	1.9	3.0	3.0	3.0	2.0	2.2	5.1	5.1	3.1						
	Basic static load rating	Coa	kN	0.77	0.76	3.2	3.1	5.3	5.3	5.3	3.2	3.5	10.5	10.5	6.6						
Fixed side bearing	Model No. of bearing			604 or equivalent			AC6-16DF or equivalent			708DFP5 or equivalent						5201A or equivalent					
	Basic dynamic load rating	Cb	kN	0.5			1.79			4.40						5.90					
	Basic static load rating	Cob	kN	0.19			1.76			4.36						3.20					

(Note 1) There is no Performance Grade H in SE30 leads 6mm and 20mm.

DIRECTION OF MOMENT

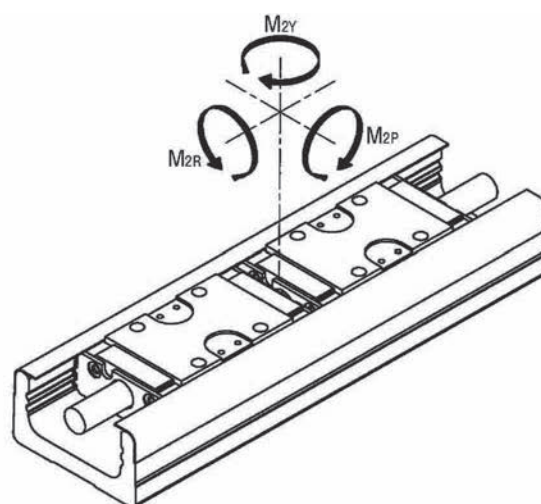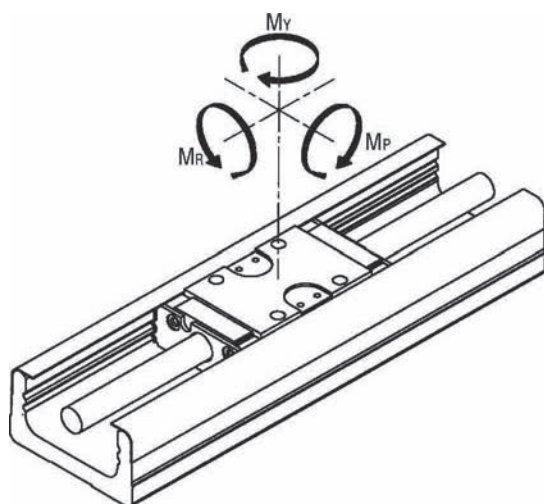

ACCURACY

Model No.	Guide rail length (mm)	Repeated positioning accuracy (μm)			Positioning accuracy (μm)			Travelling parallelism B (μm)			Backlash (μm)			Starting torque ^(Note 2) (N・m)		
		W	U	H	W	U	H	W	U	H	W	U	H	W	U	H
SE15	100	±10	±5	±3	65	60	15	15	20	5	5	0.010	0.012	0.012		
	150				70											
	200				75											
SE23	150	±10	±5	±3	70	60	15	15	20	5	5	0.03	0.06	0.06		
	200				75											
	250				85											
	300				90											
SE30	150	±10	±5	±3 (±5)	70	60	15	15	20	5	5	0.07	0.15	0.15		
	200				80											
	300				90											
	400				95											
	500				100	100	25	—							—	
	600			110												
	700			120												
	750			130	—	—										
SE45	340	±10	±5	±3 (±5)	95	60	35	35	20	5	5	0.1	0.2	0.2		
	440				100											
	540				110											
	640				120	100	40	40								
	740				130											
	840				150	150	50	50								
	940				170											

(Note 1) Measurement is to be performed with KURODA's specified motor mounted.

(Note 2) Above starting torque value is applied when the standard grease is used. The value may change depending on the properties of the grease.

(Note 3) For repeated positioning accuracy, the value in parentheses is for parallel motor mounted configurations.

INERTIA

Inertia for slide block and ball screw of ballscrew actuator is shown in the following table. (Unit : $\times 10^{-5} \text{kg} \cdot \text{m}^2$)


Model No.	Guide rail length (mm)	Without dustproof cover				With dustproof cover			
		Long block		Short block		Long block		Short block	
		1 block	2 blocks	1 block	2 blocks	1 block	2 blocks	1 block	2 blocks
		A	B	C	D	A	B	C	D
SE1501	100	0.0111	—	—	—	0.0120	—	—	—
	150	0.0160	0.0161			0.0161	0.0162		
	200	0.0210	0.0211			0.0211	0.0212		
SE1502	100	0.0115	—	—	—	0.0116	—	—	—
	150	0.0164	0.0167			0.0166	0.0171		
	200	0.0214	0.0217			0.0216	0.0220		
SE2302	150	0.0607	—	—	—	0.0615	—	—	—
	200	0.0764	0.0779			0.0772	0.0787		
	250	0.0921	0.0936			0.0929	0.0944		
	300	0.1080	0.1090			0.1090	0.1100		
SE2305	150	0.0696	—	—	—	0.0741	—	—	—
	200	0.0853	0.0946			0.0898	0.0992		
	250	0.1010	0.1100			0.1060	0.1150		
	300	0.1170	0.1260			0.1210	0.1310		
SE3004	150	0.157	—	—	—	0.162	—	—	—
	200	0.196	—			0.201	—		
	300	0.273	0.284			0.277	0.289		
	400	0.350	0.361			0.354	0.366		
	500	0.426	0.438			0.431	0.442		
	600	0.503	0.514			0.507	0.519		
	700	0.580	0.591			0.584	0.596		
SE3005	150	0.165	—	—	—	0.172	—	—	—
	200	0.203	—			0.210	—		
	300	0.280	0.298			0.287	0.305		
	400	0.356	0.374			0.363	0.381		
	500	0.433	0.451			0.440	0.458		
	600	0.510	0.528			0.517	0.535		
	700	0.587	0.605			0.593	0.611		
SE3006	150	0.175	—	—	—	0.184	—	—	—
	200	0.213	—			0.223	—		
	300	0.290	0.316			0.299	0.325		
	400	0.367	0.392			0.376	0.402		
	500	0.443	0.469			0.453	0.479		
	600	0.520	0.546			0.529	0.555		
	700	0.597	0.622			0.606	0.632		
SE3010	150	0.222	—	—	—	0.250	—	—	—
	200	0.261	—			0.288	—		
	300	0.337	0.409			0.365	0.437		
	400	0.414	0.486			0.442	0.514		
	500	0.491	0.562			0.518	0.590		
	600	0.567	0.639			0.595	0.667		
	700	0.644	0.716			0.672	0.744		
	750	0.682	0.754			0.710	0.782		
SE3020	150	0.453	—	—	—	0.558	—	—	—
	200	0.491	—			0.597	—		
	300	0.568	0.874			0.673	1.085		
	400	0.645	0.950			0.750	1.161		
	500	0.721	1.027			0.827	1.238		
	600	0.798	1.104			0.903	1.315		
	700	0.875	1.181			0.980	1.391		
SE4505	340	1.63	1.68	1.61	1.64	1.65	1.72	1.62	1.67
	440	2.01	2.10	1.99	2.03	2.03	2.11	2.01	2.06
	540	2.40	2.46	2.38	2.42	2.42	2.50	2.40	2.45
	640	2.79	2.85	2.77	2.81	2.81	2.89	2.78	2.83
	740	3.17	3.24	3.16	3.20	3.20	3.28	3.17	3.22
	840	3.56	3.62	3.55	3.59	3.59	3.67	3.56	3.61
	940	3.95	4.01	3.94	3.97	3.98	4.05	3.95	4.00
SE4510	340	1.81	2.04	1.73	1.88	1.89	2.20	1.78	1.98
	440	2.20	2.42	2.12	2.27	2.28	2.59	2.17	2.37
	540	2.58	2.81	2.51	2.66	2.67	2.98	2.56	2.76
	640	2.97	3.20	2.90	3.05	3.06	3.37	2.95	3.15
	740	3.36	3.59	3.28	3.44	3.44	3.76	3.33	3.54
	840	3.75	3.98	3.67	3.82	3.83	4.14	3.72	3.93
SE4520	940	4.14	4.36	4.06	4.21	4.22	4.53	4.11	4.31
	340	2.54	3.45	2.23	2.84	2.87	4.12	2.43	3.24
	440	2.92	3.84	2.62	3.23	3.26	4.50	2.82	3.63
	540	3.31	4.22	3.01	3.62	3.65	4.89	3.21	4.02
	640	3.70	4.61	3.40	4.00	4.03	5.28	3.60	4.41
	740	4.09	5.00	3.78	4.39	4.42	5.67	3.99	4.80
	840	4.48	5.39	4.17	4.78	4.81	6.06	4.38	5.19
	940	4.86	5.78	4.56	5.17	5.20	6.45	4.76	5.57

(Note 1) Dash (-) in the above table means the configuration is not available.


SE15

● LONG BLOCK CONFIGURATIONS

With 1 long block: A (With 2 long blocks: B)

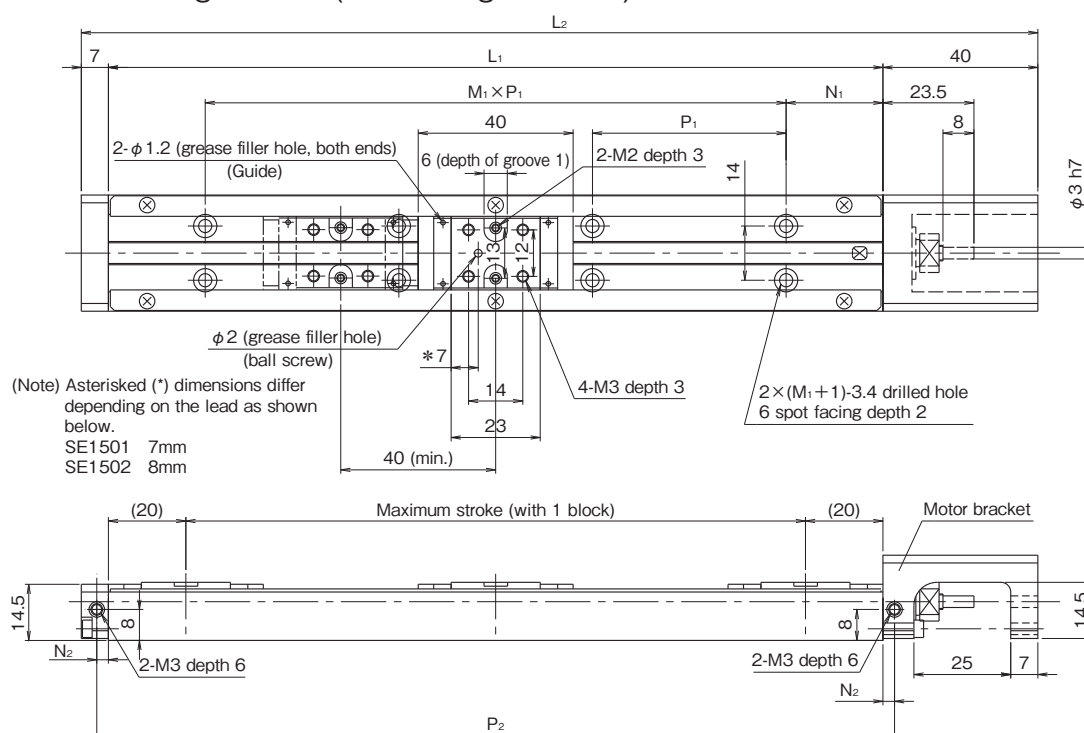


With dustproof cover

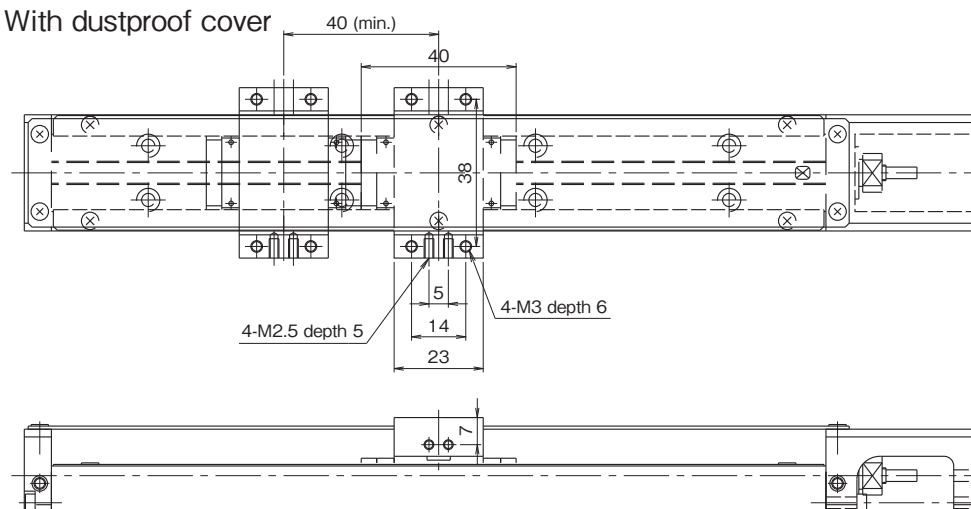

Without cover

With dustproof cover

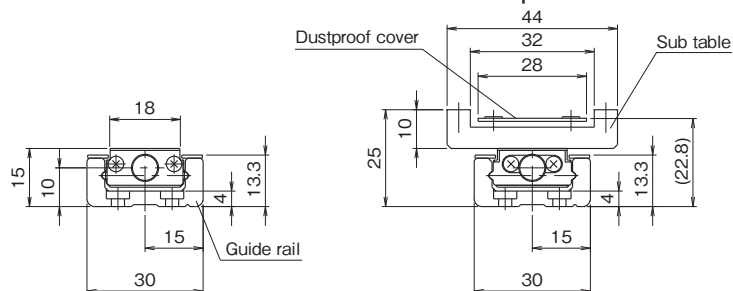

SE15

● LONG BLOCK DIMENSIONS

(Unit: mm)

Guide rail length L_1	Overall length L_2	N_1	$M_1 \times P_1$	N_2	P_2	Maximum stroke	
						Long block	
						A: 1 block	B: 2 blocks
100	147	25	1 × 50	3	106	60	—
150	197		2 × 50		156	110	70
200	247		3 × 50		206	160	120

● PERMISSIBLE SPEED / MASS

Guide rail length L_1 (mm)	Permissible speed (mm/s)		Mass (kg)					
	Lead		Without cover		With cover		Slide block	
	1mm	2mm	A	B	A	B	Without cover	With cover
100	133	260	0.28	—	0.31	—	0.03	0.05
150			0.36	0.39	0.39	0.44		
200	90	180	0.45	0.48	0.48	0.53		

(Note 1) The mass indicated in the columns "Without cover" and "With cover" in the above table includes the mass of slide block.


(Note 2) Hex socket head cap screws (M3×5, with stainless steel) should be used for fixing guide rails.

(Note 3) For long rail configurations, please consult KURODA.


SE15

● LONG BLOCK SUB GUIDE RAIL CONFIGURATIONS

With 1 long block: A (With 2 long blocks: B)

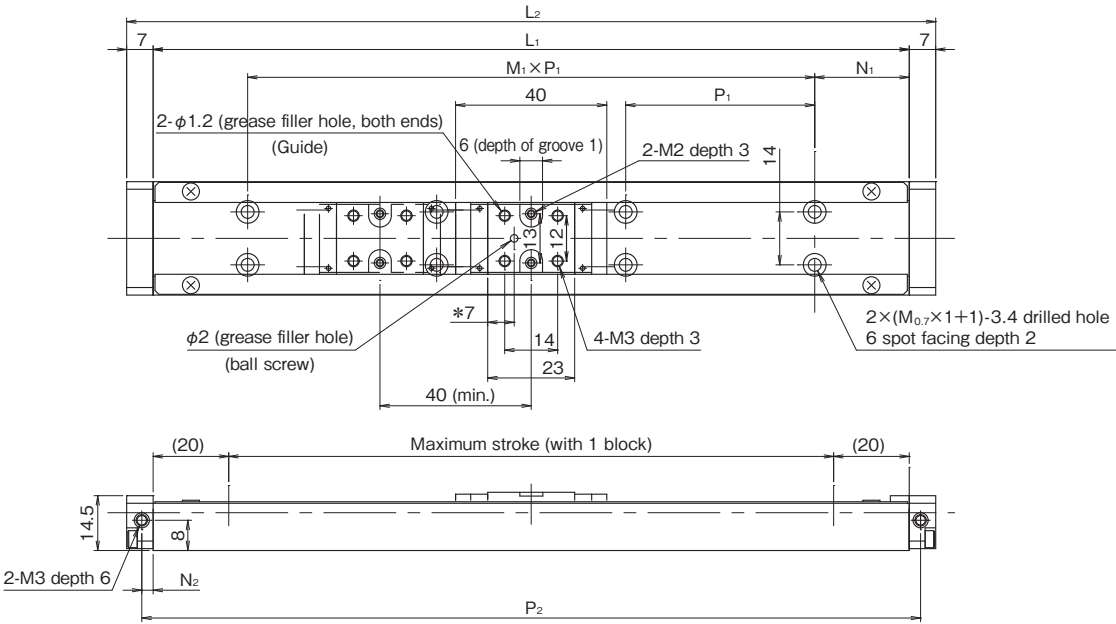


With dustproof cover

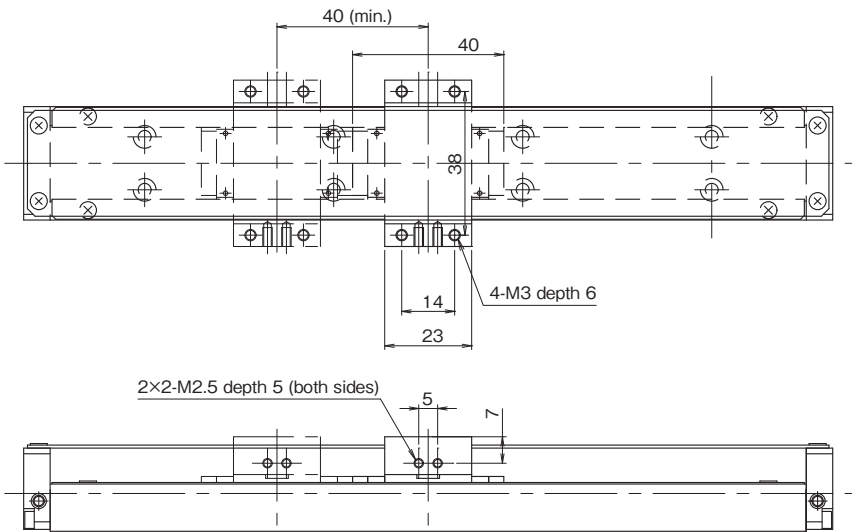

Without cover

With dustproof cover

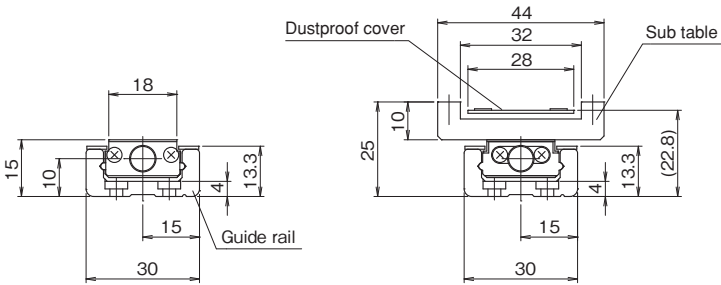

SE15

● LONG BLOCK SUB GUIDE RAIL DIMENSIONS

(Unit: mm)

Guide rail length L_1	Overall length L_2	N_1	$M_1 \times P_1$	N_2	P_2	Maximum stroke	
						Long block	
						A: 1 block	B: 2 blocks
100	147	25	1 × 50	3	106	60	—
150	197		2 × 50		156	110	70
200	247		3 × 50		206	160	120

● PERMISSIBLE SPEED / MASS

Guide rail length L_1 (mm)	Permissible speed (mm/s)	Mass (kg)					
		Without cover		With cover		Slide block	
		A	B	A	B	Without cover	With cover
100	260	0.25	—	0.29	—	0.03	0.05
150		0.33	0.36	0.36	0.41		
200		0.4	0.43	0.44	0.49		

(Note 1) The mass indicated in the columns "Without cover" and "With cover" in the above table includes the mass of slide block.


(Note 2) Hex socket head cap screws (M3×5, with stainless steel) should be used for fixing guide rails.

(Note 3) For long rail configurations, please consult KURODA.

SE15


● MOTOR BRACKET CONFIGURATIONS

Motor bracket configuration: A0

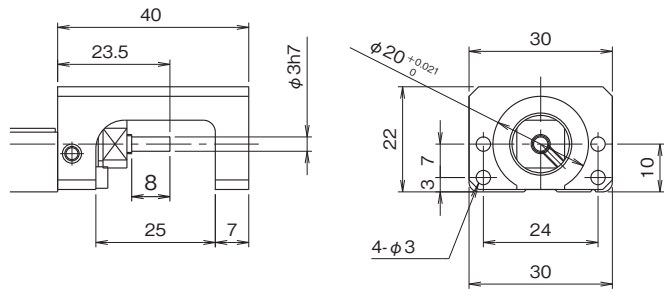


● MOTOR BRACKET CONFIGURATIONS (INTERMEDIATE FLANGE)


Motor bracket configuration: A1 (mass: 10g)

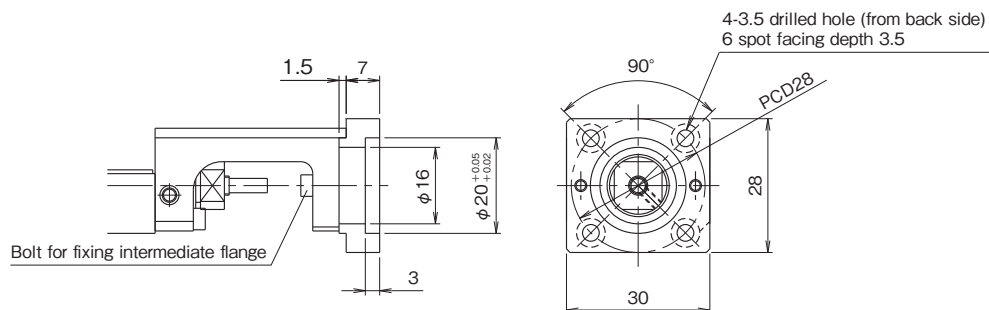

Motor bracket configuration: A2 (mass: 10g)

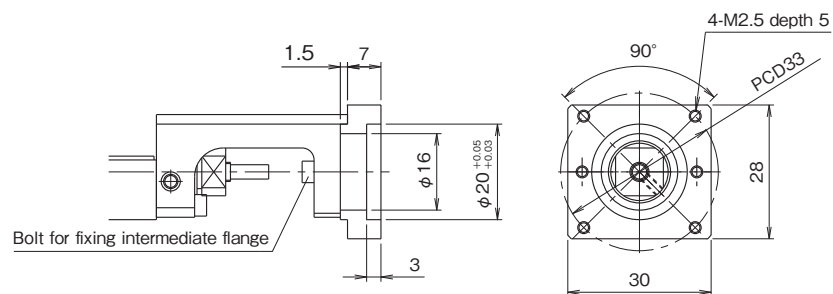

Motor bracket configuration: A3 (mass: 10g)

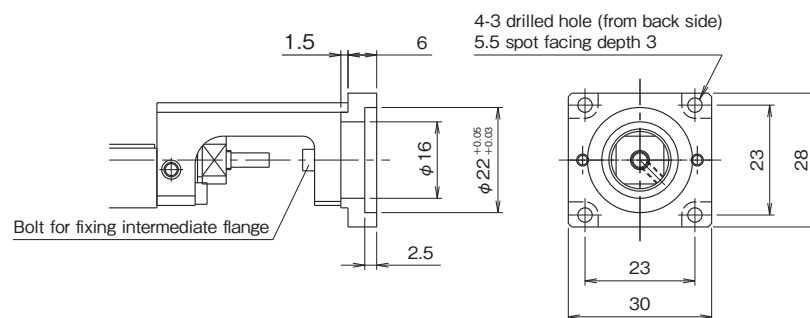

(Note) For A1 and A3 configuration, install the intermediate flange to motor before mounting it to actuator.

SE15

● MOTOR BRACKET CONFIGURATIONS AND MOTOR OPTION

Motor option					Motor bracket configuration	Recommended coupling
Motor type	Maker	Series	Model No.	Output		
AC SERVO motor	MITSUBISHI ELECTRIC	MELSERVO J4	HG-AK0136	10W	A1	ALS-014 (MIKI PULLEY)
			HG-AK0236	20W		
			HG-AK0336	30W		
	YASKAWA ELECTRIC	Σ-V	SGMMV-A1	10W	A1	
			SGMMV-A2	20W		
			SGMMV-A3	30W		
		Σ-7	SGM7M-A1	10W	A1	
			SGM7M-A2	20W		
			SGM7M-A3	30W		
Stepping motor	ORIENTAL MOTOR	α step	ARM2	□28mm	A3	
		5-Phase	CRK52			
		2-Phase	PKP22			


- For motors other than above-mentioned, consult KURODA.
- When selecting a rigid type of coupling for connecting a motor, consult KURODA.
- For detailed specifications of above-mentioned motors and couplings, refer to catalogs or websites provided by the makers.

SE15


● SENSOR

Symbol K (NPN) / E (PNP): Proximity sensor (Azbil)

Without cover

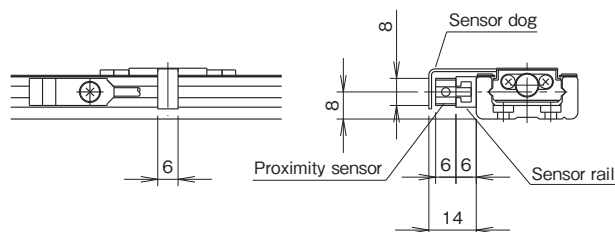


With dustproof cover

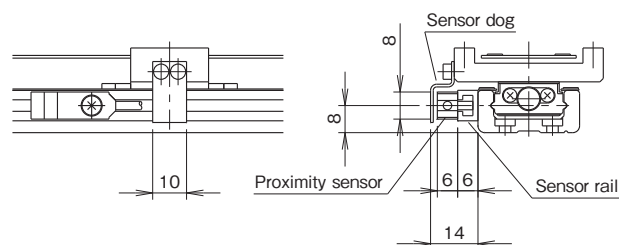

● SENSOR RAIL

Sensor rails only available with no sensors.

Sensor rail No. 1

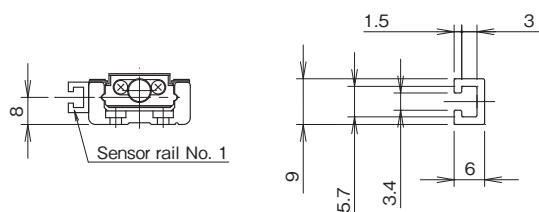

SG

SG20

SG26

SG33

SG46

SG55

SE

SE15

SE23

SE30

SE45

SC

SC23

SC30

SC45


Sensor

Technical Data


SE23

● LONG BLOCK CONFIGURATIONS

With 1 long block: A (With 2 long blocks: B)

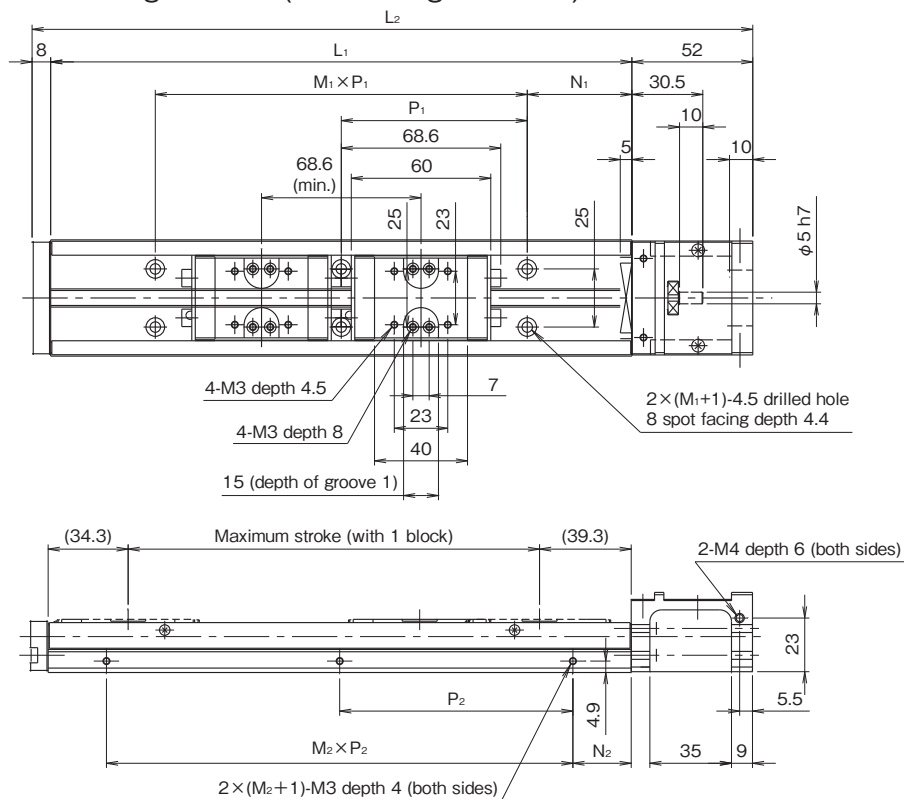


With dustproof cover

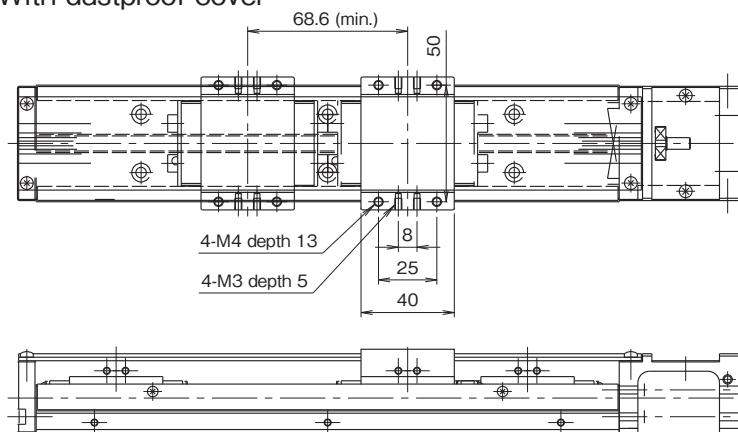

Without cover

With dustproof cover

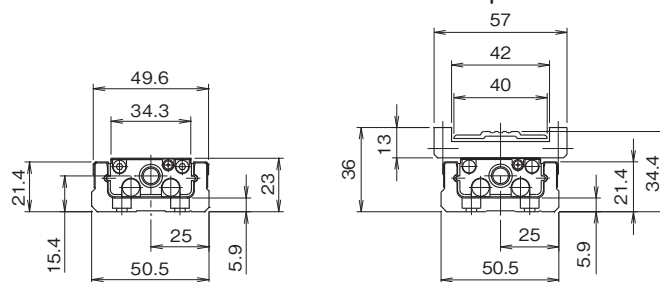

SE23

● LONG BLOCK DIMENSIONS

(Unit: mm)

Guide rail length L ₁	Overall length L ₂	N ₁	M ₁ ×P ₁	N ₂	M ₂ ×P ₂	Maximum stroke		Maximum stroke		Minimum stroke (with LUBSEAL)
						Long block		Long block (with LUBSEAL)		
						A: 1 block	B: 2 blocks	E: 1 block	F: 2 blocks	
150	210	35	1×80	25	1×100	76	—	—	—	75
200	260	20	2×80	50		126	57	120	—	
250	310	45		25	2×100	176	107	170	95	
300	360	30	3×80	50		226	157	220	145	

● PERMISSIBLE SPEED / MASS

Guide rail length L_1 (mm)	Permissible speed (mm/s)		Mass (kg)					
	Lead		Without cover		With cover		Slide block	
	2mm	5mm	A	B	A	B	Without cover	With cover
150	200	490	1.00	—	1.11	—	0.14	0.26
200			1.21	1.35	1.32	1.46		
250			1.41	1.56	1.52	1.67		
300			1.61	1.76	1.73	1.88		


(Note 1) The mass indicated in the columns "Without cover" and "With cover" in the above table includes the mass of slide block.

(Note 2) For long rail configurations, please consult KURODA.


SE23

● LONG BLOCK SUB GUIDE RAIL CONFIGURATIONS

With 1 long block: A (With 2 long blocks: B)

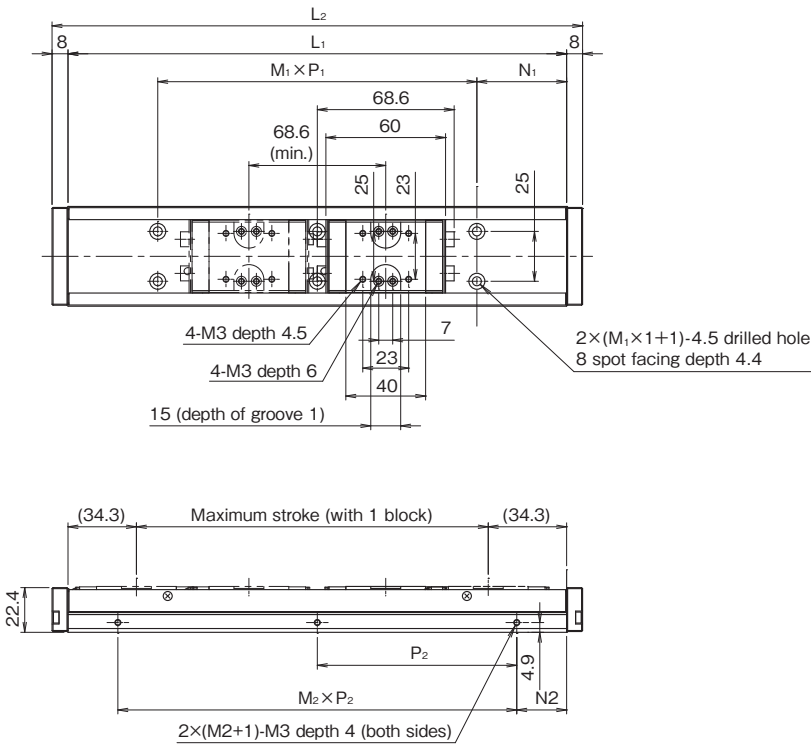


With dustproof cover

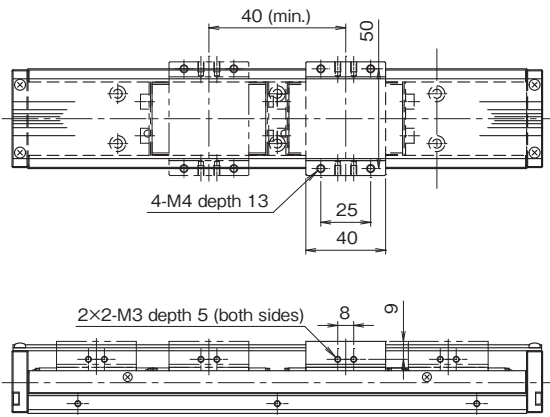

Without cover

With dustproof cover

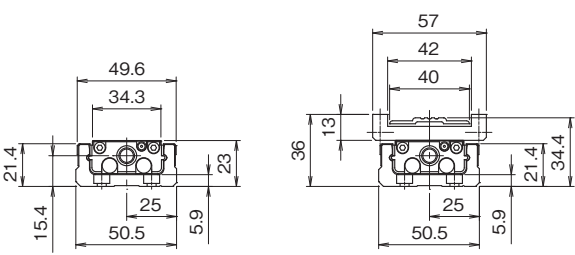

SE23

● LONG BLOCK SUB GUIDE RAIL DIMENSIONS

(Unit: mm)

Guide rail length L ₁	Overall length L ₂	N ₁	M ₁ ×P ₁	N ₂	M ₂ ×P ₂	Maximum stroke		Maximum stroke		Minimum stroke (with LUBSEAL)
						Long block		Long block (with LUBSEAL)		
						A: 1 block	B: 2 blocks	E: 1 block	F: 2 blocks	
150	210	35	1×80	25	1×100	81	—	75	—	75
200	260	20	2×80	50		131	62	125	—	
250	310	45		25	2×100	181	112	175	100	
300	360	30	3×80	50		231	162	225	150	

● PERMISSIBLE SPEED / MASS

Guide rail length L_1 (mm)	Permissible speed (mm/s)	Mass (kg)					
		Without cover		With cover		Slide block	
		A	B	A	B	Without cover	With cover
150	490	0.95	—	1.03	—	0.14	0.26
200		1.13	1.29	1.23	1.43		
250		1.32	1.47	1.42	1.63		
300		1.50	1.66	1.62	1.82		


(Note 1) The mass indicated in the columns "Without cover" and "With cover" in the above table includes the mass of slide block.

(Note 2) For long rail configurations, please consult KURODA.

SE23


MOTOR BRACKET CONFIGURATIONS

Motor bracket configuration: A0

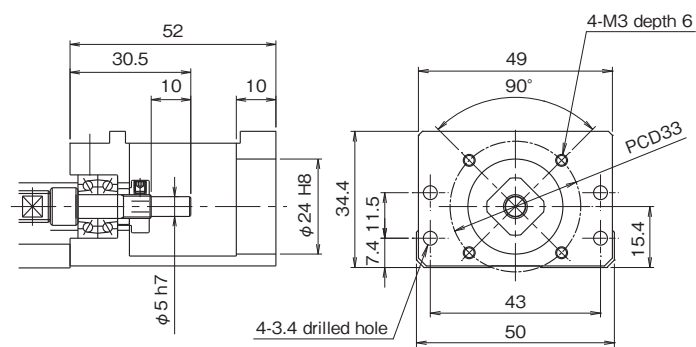


● MOTOR BRACKET CONFIGURATIONS (INTERMEDIATE FLANGE)


Motor bracket configuration: A1 (mass: 28g)

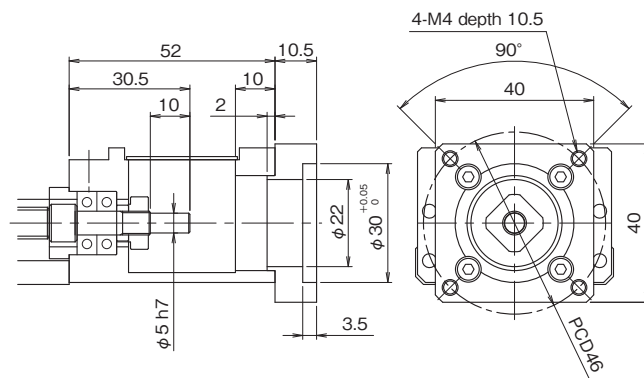

Motor bracket configuration: A2 (mass: 12g)

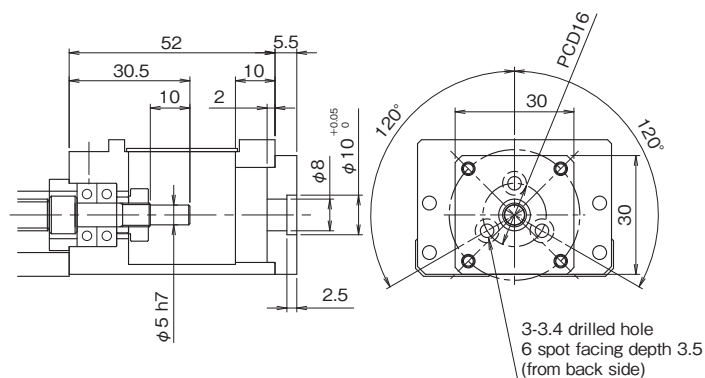

Motor bracket configuration: A3 (mass: 24g)

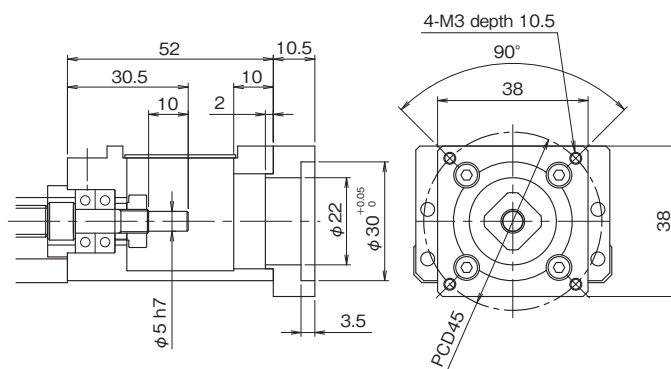


(Note) For A2 configuration, install the intermediate flange to motor before mounting it to actuator.


SE23

● MOTOR BRACKET CONFIGURATIONS (INTERMEDIATE FLANGE)


Motor bracket configuration: A5 (mass: 32g)

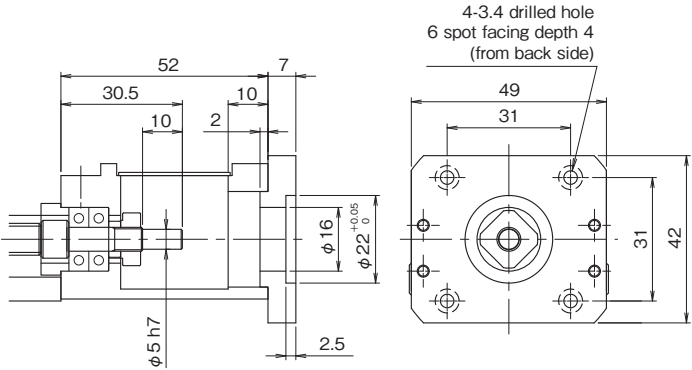

Motor bracket configuration: A6 (mass: 16g)

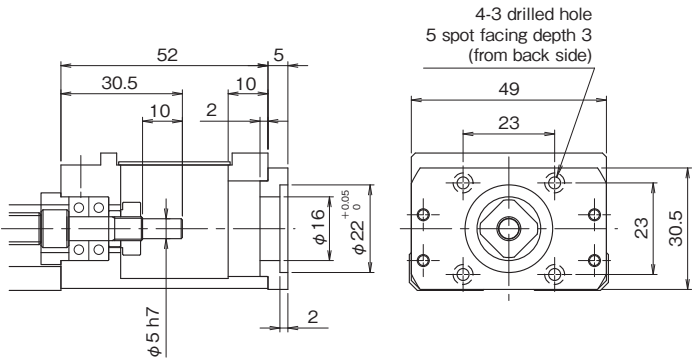

Motor bracket configuration: A7 (mass: 8g)

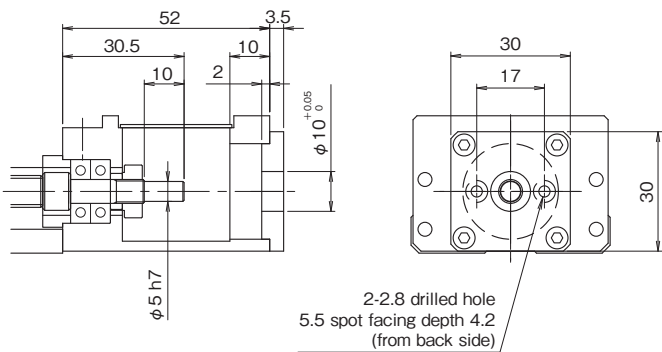

(Note) For A5, A6, and A7 configuration, install the intermediate flange to motor before mounting it to actuator.

● MOTOR BRACKET CONFIGURATIONS AND MOTOR OPTION

Motor option					Motor bracket configuration	Recommended coupling
Motor type	Maker	Series	Model No.	Output		
AC SERVO motor	PANASONIC	MINAS A5	MSME5A	50W	A3	SFC-010DA2 (MIKI PULLEY) ACD-19A (ISEL)
			MSME01	100W		
		MINAS A6	MSMF5A	50W		
			MSMF01	100W		
	MITSUBISHI ELECTRIC	MELSERVO J3	HF-KP (MP) 053	50W	A1	
			HF-KP (MP) 13	100W		
		MELSERVO J4	HG-KR (MR) 053	50W		
			HG-KR (MR) 13	100W		
	YASKAWA ELECTRIC	Σ-V	SGMJV, SGMAV-A5	50W	A1	
			SGMJV, SGMAV-01	100W		
			SGMJV, SGMAV-C2	150W		
		Σ-7	SGM7J, SGM7A-A5	50W		
			SGM7J, SGM7A-01	100W		
			SGM7J, SGM7A-C2	150W		
	SANYO ELECTRIC	SANMOTION R	R2AA04005	50W	A1	
			R2AA04010	100W		
Stepping motor	ORIENTAL MOTOR	α step	ARM2	□28mm	A6	
			ARM4	□42mm	A5	
		5-Phase	CRK52	□28mm	A5	
			CRK54	□42mm		
			RKS54	□42mm		
		2-Phase	PKP22	□28mm	A6	
			PKP24	□42mm	A5	
		SANYO ELECTRIC	5-Phase	F series□42mm	□42mm	A5

•For motors other than above-mentioned, consult KURODA.


•When selecting a rigid type of coupling for connecting a motor, consult KURODA.

•For detailed specifications of above-mentioned motors and couplings, refer to catalogs or websites provided by the makers.


SE23

● SENSOR

Symbol S (NPN): Photo-microsensor (Panasonic Industrial Devices SUNX)

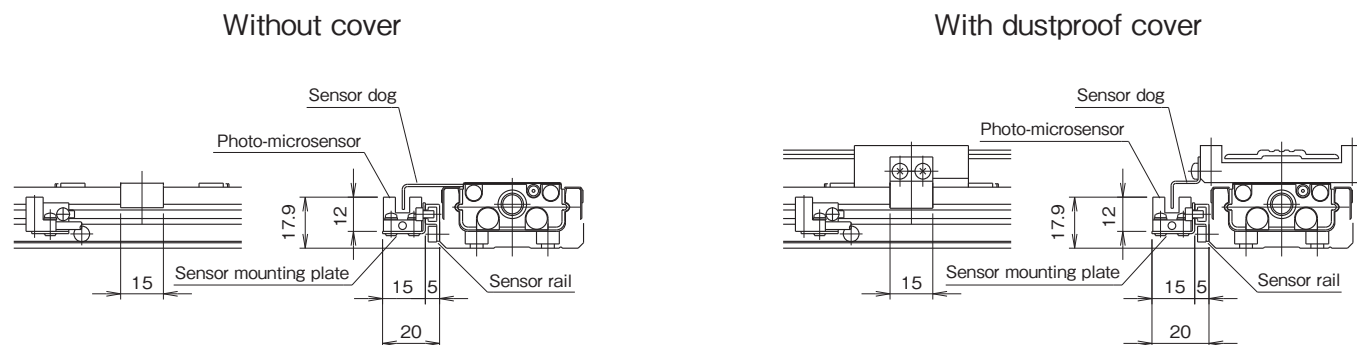


Symbol K (NPN) / E (PNP): Proximity sensor (Azbil)

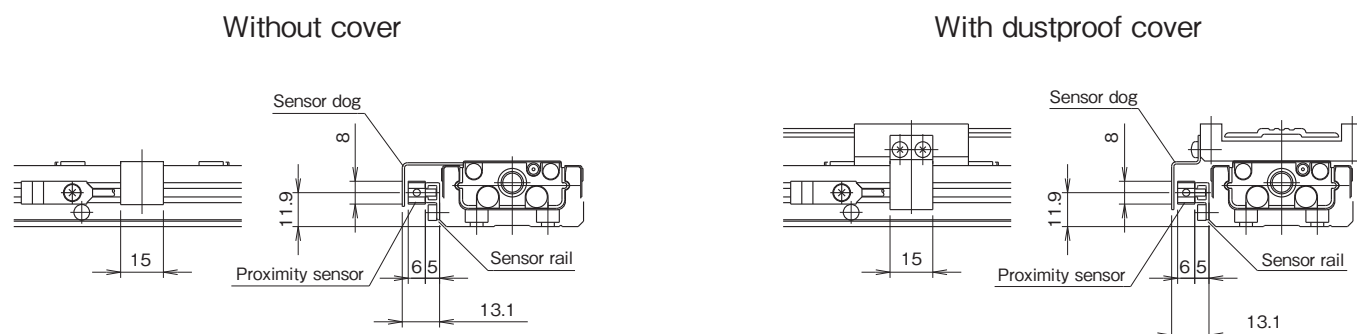

● SENSOR RAIL

Sensor rails only available with no sensors.

Sensor rail No. 1

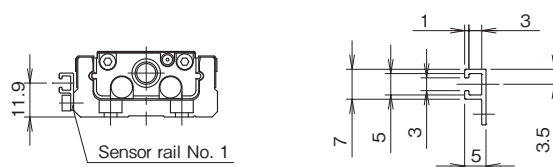


SE23


● DOWEL PIN HOLE

Dowel pin holes are applicable on the slide blocks with part number "PS", sub-tables "PR" or slide blocks and sub-tables "PSR". For an actuator with 2 blocks, they are on both driving-side block and driven-side block. Please note that dowel pins are not equipped.

Long block without dustproof cover with "PS" Long block with dustproof cover with "PS"

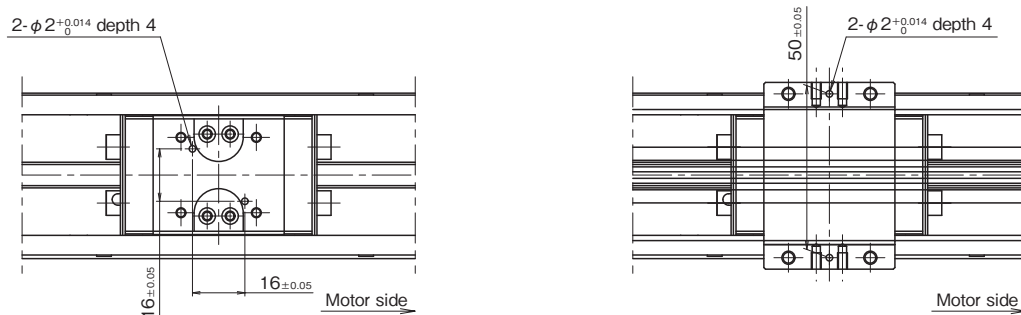

Guide rail with "PR"

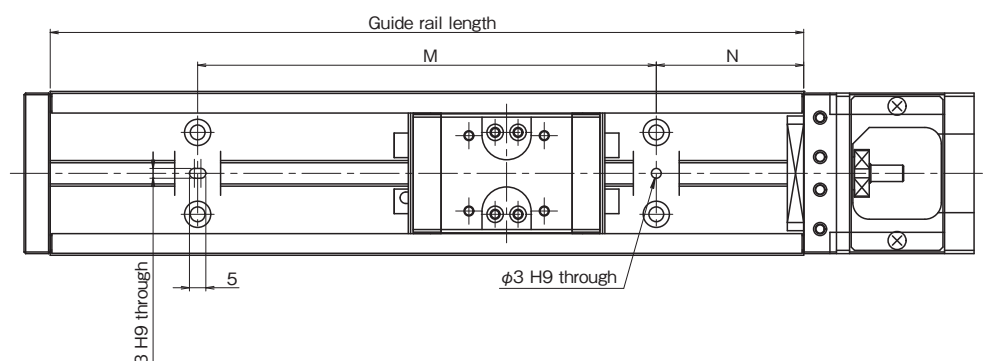


(Unit: mm)

Guide rail length	N	M	Dowel pin height
150	35	80	Less than 5.9
200	20	160	
250	45		
300	30	240	


Notice: In case dowel pin is stuck out from the U-guide rail, it may interfere with and break the slide block.

LONG BLOCK CONFIGURATIONS

With 1 long block: A (With 2 long blocks: B)

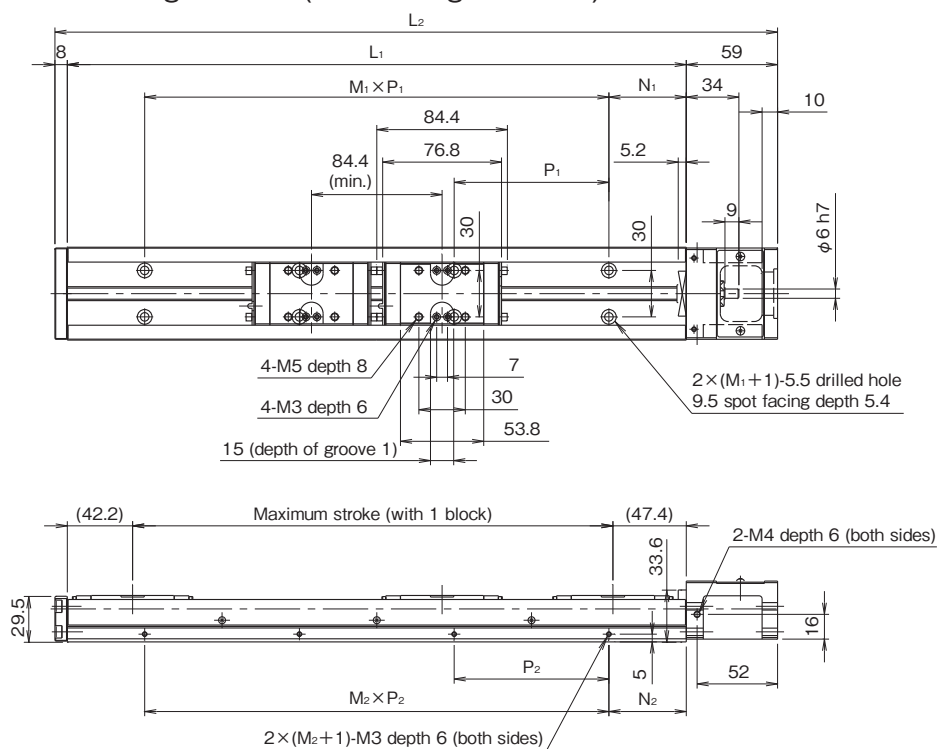


With dustproof cover

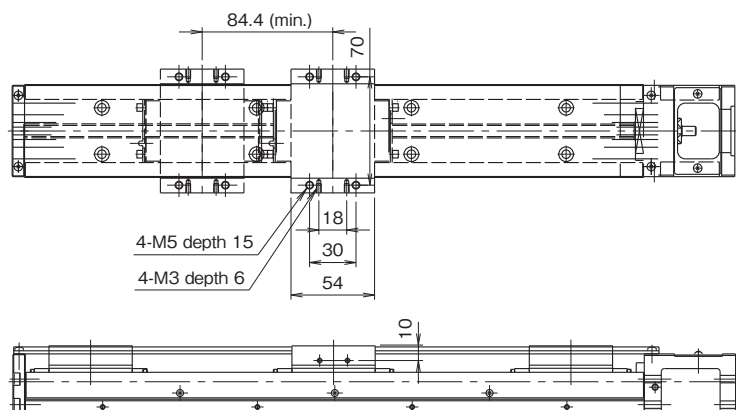

Without cover

With dustproof cover

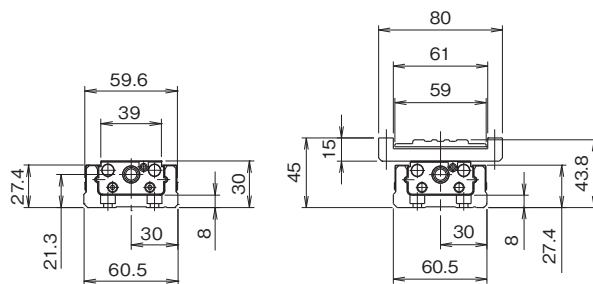

SE30

● LONG BLOCK DIMENSIONS

(Unit: mm)

Guide rail length L ₁	Overall lentg L ₂	N ₁	M ₁ ×P ₁	N ₂	M ₂ ×P ₂	Maximum stroke		Maximum stroke		Minimum stroke (with LUBSEAL)
						Long block		Long block (with LUBSEAL)		
						A: 1 block	B: 2 blocks	E: 1 block	F: 2 blocks	
150	217	25	1×100	25	1×100	60	—	—	—	91
200	267	50		50		110	—	104	—	
300	367		2×100		2×100	210	126	204	114	
400	467		3×100		3×100	310	226	304	214	
500	567		4×100		4×100	410	326	404	314	
600	667		5×100		5×100	510	426	504	414	
700	767	6×100	6×100	610	526	604	514			
750	817	25	7×100	25	7×100	660	576	654	564	

● PERMISSIBLE SPEED / MASS

Guide rail length L_1 (mm)	Permissible speed (mm/s)					Mass (kg)					
	リード					Without cover		With cover		Slide block	
	4mm	5mm	6mm	10mm	20mm	A	B	A	B	Without cover	With cover
150	320	400	480	810	1200	1.6	—	1.7	—	0.30	0.40
200						1.9	—	2.1	—		
300						2.6	2.9	2.7	3.2		
400						3.3	3.6	3.4	3.8		
500						3.9	4.2	4.1	4.5		
600	240	300	360	600		4.6	4.9	4.7	5.1		
700	170	210	250	430	910	5.2	5.5	5.4	5.8		
750	—	—	—	380	—	5.6	5.9	5.7	6.1		

(Note 1) Guide rail length of 750 mm is available only for SE3010.


(Note 2) The mass indicated in the columns "Without cover" and "With cover" in the above table includes the mass of slide block.

(Note 3) For long rail configurations, please consult KURODA.



SE30

● LONG BLOCK SUB GUIDE RAIL CONFIGURATIONS


With 1 long block: A (With 2 long blocks: B)

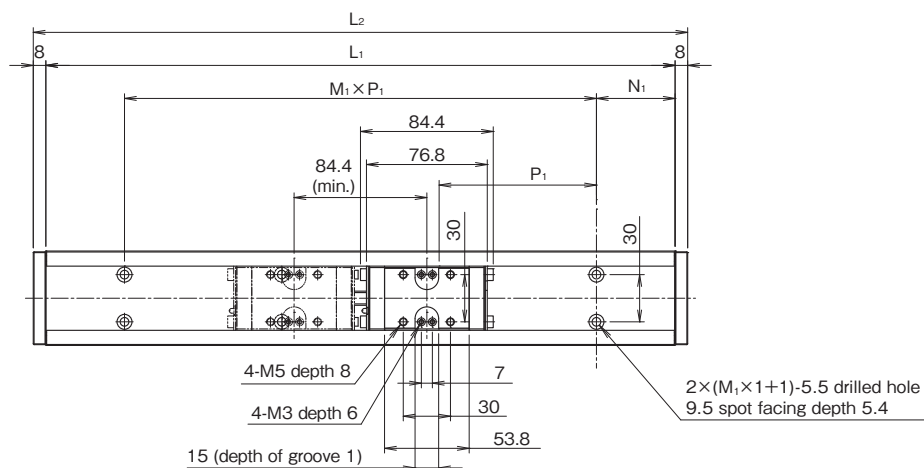


With dustproof cover

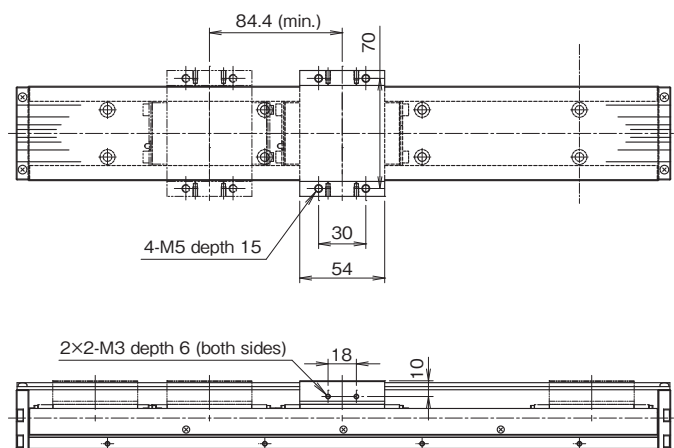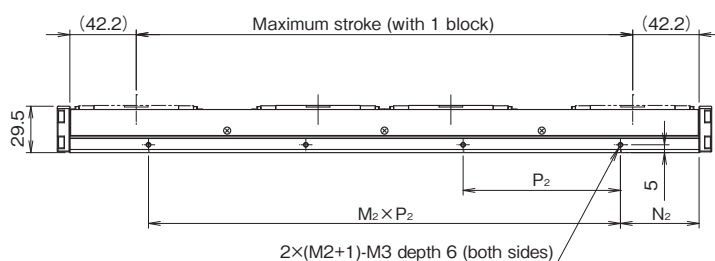

Without cover



With dustproof cover



SE30

● LONG BLOCK SUB GUIDE RAIL DIMENSIONS

(Unit: mm)

Guide rail length L ₁	Overall lengt L ₂	N ₁	M ₁ × P ₁	N ₂	M ₂ × P ₂	Maximum stroke		Maximum stroke		Minimum stroke (with LUBSEAL)
						Long block		Long block (with LUBSEAL)		
						A: 1 block	B: 2 blocks	E: 1 block	F: 2 blocks	
150	217	25	1 × 100	25	1 × 100	65	—	—	—	91
200	267	50		50		115	—	109	—	
300	367		2 × 100		2 × 100	215	131	209	119	
400	467		3 × 100		3 × 100	315	231	309	219	
500	567		4 × 100		4 × 100	415	331	409	319	
600	667		5 × 100		5 × 100	515	431	509	419	
700	767		6 × 100		6 × 100	615	531	609	519	
750	817	25	7 × 100	25	7 × 100	665	581	659	569	

● PERMISSIBLE SPEED / MASS

Guide rail length L_1 (mm)	Permissible speed (mm/s)	Mass (kg)					
		Without cover		With cover		Slide block	
		A	B	A	B	Without cover	With cover
150	1200	1.46	—	1.65	—	0.30	0.40
200		1.74	—	1.96	—		
300		2.30	2.59	2.58	2.97		
400		2.87	3.15	3.19	3.58		
500		3.43	3.72	3.81	4.20		
600		4.00	4.28	4.42	4.81		
700		4.56	4.85	5.04	5.43		
750		4.85	5.13	5.35	5.73		

(Note 1) Guide rail length of 750 mm is available only for SE3010.


(Note 2) The mass indicated in the columns "Without cover" and "With cover" in the above table includes the mass of slide block.

(Note 3) For long rail configurations, please consult KURODA.


SE30

MOTOR BRACKET CONFIGURATIONS

Motor bracket configuration: A0

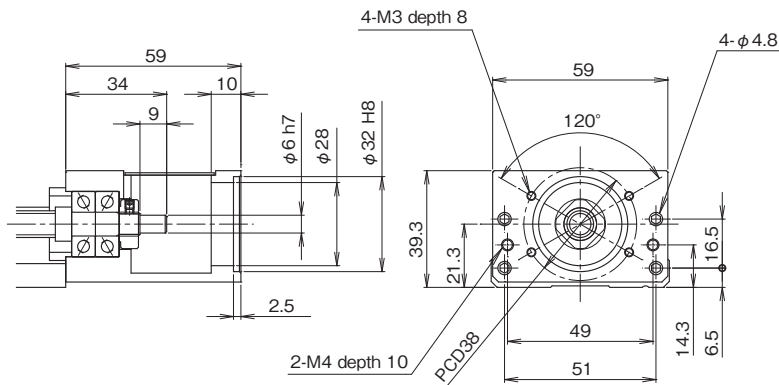

Motor bracket configuration: RN

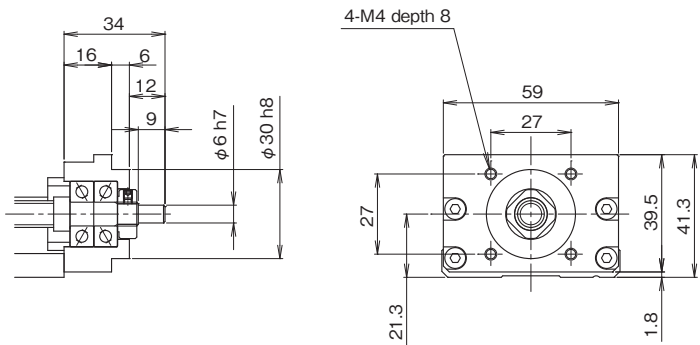

Mass of the RN configuration is 0.085 kg less than the value shown in the table on page 75.

MOTOR BRACKET CONFIGURATIONS AND MOTOR OPTION


Motor option					Motor bracket configuration	Recommended coupling
Motor type	Maker	Series	Model No.	Output		
AC SERVO motor	PANASONIC	MINAS A5	MSME5A	50W	A2	SFC-020DA2(MIKI PULLEY) ACD-27A (ISEL)
			MSME01	100W		
		MINAS A6	MSMF5A	50W		
			MSMF01	100W		
	MITSUBISHI ELECTRIC	MELSERVO J3	HF-KP (MP) 053	50W	A1	SFC-020DA2(MIKI PULLEY) ACD-27A (ISEL)
			HF-KP (MP) 13	100W		
			HF-KP (MP) 23	200W		
		MELSERVO J4	HG-KR (MR) 053	50W	A1	SFC-020DA2(MIKI PULLEY) ACD-27A (ISEL)
			HG-KR (MR) 13	100W		
			HG-KR (MR) 23	200W		
	YASKAWA ELECTRIC	Σ -V	SGMJV, SGMAV-A5	50W	A1	SFC-020DA2(MIKI PULLEY) ACD-27A (ISEL)
			SGMJV, SGMAV-01	100W		
			SGMJV, SGMAV-C2	150W		
			SGMJV, SGMAV-02	200W		
		Σ -7	SGM7J, SGM7A-A5	50W	A1	SFC-020DA2(MIKI PULLEY) ACD-27A (ISEL)
			SGM7J, SGM7A-01	100W		
			SGM7J, SGM7A-C2	150W		
			SGM7J, SGM7A-02	200W		
	OMRON	G5	R88M-K05030	50W	A1	SFC-020DA2(MIKI PULLEY) ACD-27A (ISEL)
			R88M-K10030	100W		
	SANYO ELECTRIC	SANMOTION R	R2AA04005	50W	A3	SFC-020DA2(MIKI PULLEY) ACD-27A (ISEL)
			R2AA04010	100W		
			R2AA06020	200W		
Stepping motor	ORIENTAL MOTOR	α step	ARM4	□42mm	B1	SFC-010DA2(MIKI PULLEY) ACD-19A (ISEL)
			ARM6	□60mm	A4	SFC-020D2(MIKI PULLEY) ACD-27A (ISEL)
		5-Phase	CRK54, RKS54	□42mm	B1	SFC-010DA2(MIKI PULLEY) ACD-19A (ISEL)
			CRK56, RKS56	□60mm	A4	SFC-020D2(MIKI PULLEY) ACD-27A (ISEL)
		2-Phase	PKP24	□42mm	B1	SFC-010DA2(MIKI PULLEY) ACD-19A (ISEL)
			PK26	□60mm	A5	SFC-020D2(MIKI PULLEY) ACD-27A (ISEL)
	SANYO ELECTRIC	5-Phase	F series □42mm	□42mm	B1	SFC-010DA2(MIKI PULLEY) ACD-19A (ISEL)
			F series □60mm	□60mm	A4	SFC-020DA2(MIKI PULLEY) ACD-27A (ISEL)

•For motors other than above-mentioned, consult KURODA.

•When selecting a rigid type of coupling for connecting a motor, consult KURODA.

•For detailed specifications of above-mentioned motors and couplings, refer to catalogs or websites provided by the makers.

● PARALLEL MOTOR MOUNTING

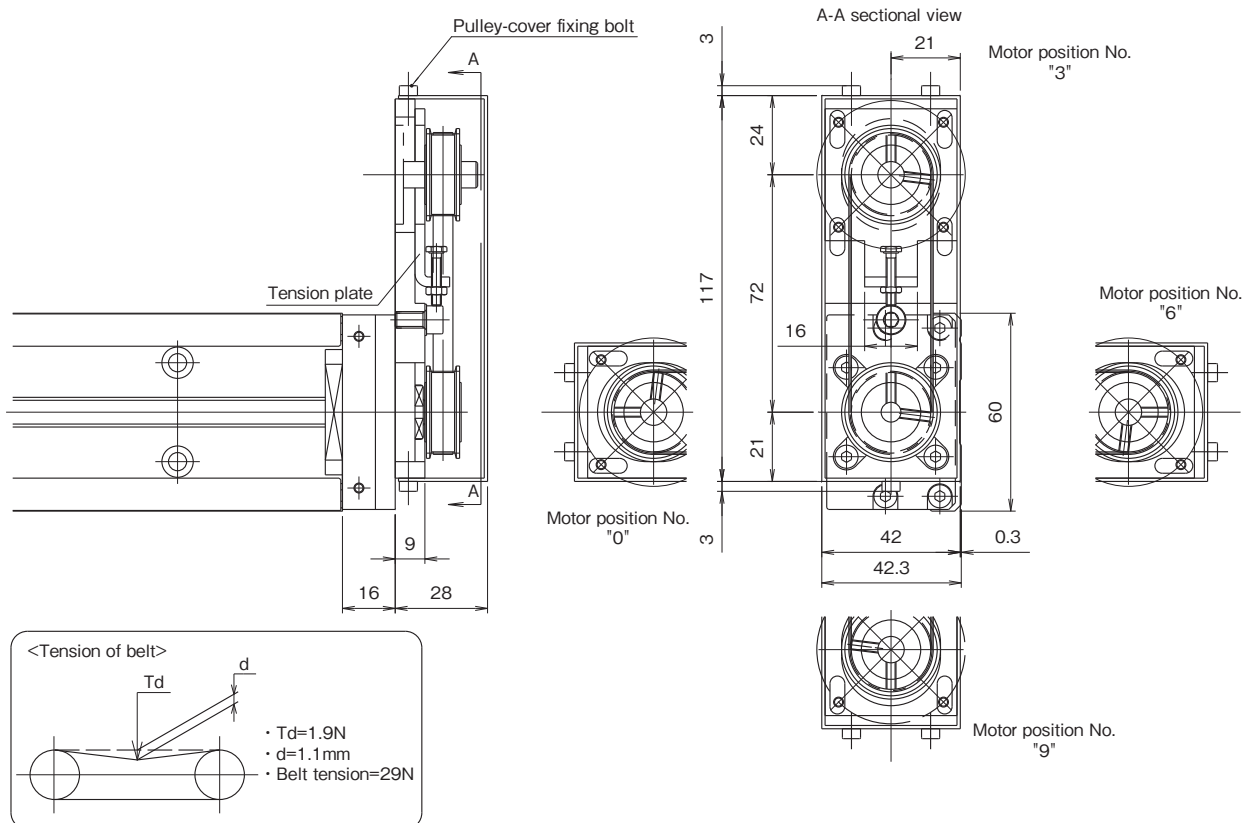

- Pulley unit position can be adjusted at every 90 degree.
- Motor parallel mounting can be equipped with dust-proof cover and sensor.
- Fill Motor position No. in ☐.

If the pulley cover may not be removable due to restrictions arising from direction of the unit, consult KURODA for modifying positions of the pulley-cover fixing bolts (3 M3 hex socket bolts).


- Tension plate position can be built in pulley cover.
- Although tension plate is attached inside the cover with standard specifications, it can also be attached to outside the cover. Consult KURODA for such modification.
- The mass is 0.2kg larger than the values shown in table on page 75.
- Inertia moment is $2.22 \times 10^{-6} \text{kg} \cdot \text{m}^2$ larger than the value shown in table on page 55.

Mark	Pulley Inner dia.	Applicable motor
<input type="checkbox"/> E	Inner dia. $\phi 8$	Panasonic 50 - 100W motor and so on
<input type="checkbox"/> F	Inner dia. $\phi 8$	Yaskawa 50 - 100W motor and so on
		Mitsubishi Electric 50 - 100W motor and so on
		Sanyo Electric 50 - 100W motor and so on


Fullfill the motor position No. in ☐.

Check the spec. if the motor can be assembled before using.

Parallel motor mounting type E ☐
Tension plate dimension

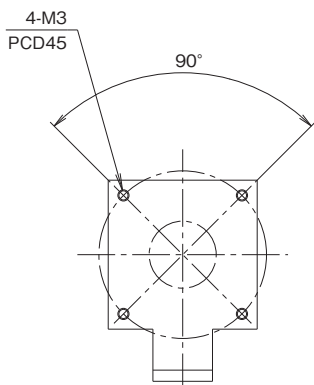

Parallel motor mounting type F ☐
Tension plate dimension

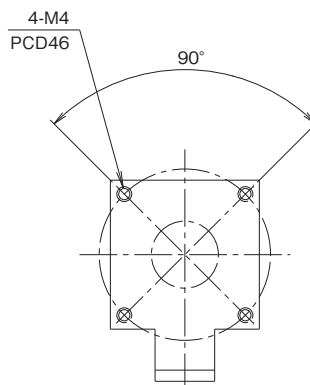


SE30


● SENSOR

Symbol C (NPN) / P (PNP), M / Y (PNP): Photo-microsensor (OMRON, Panasonic Industrial Devices SUNX)

Without dustproof cover

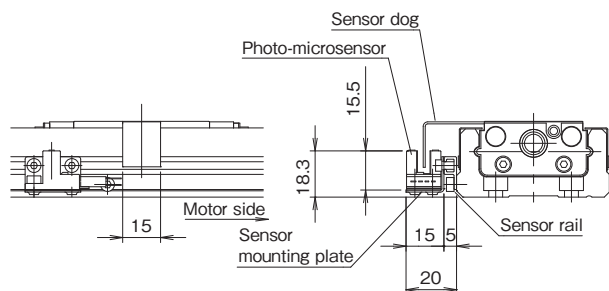


With dustproof cover

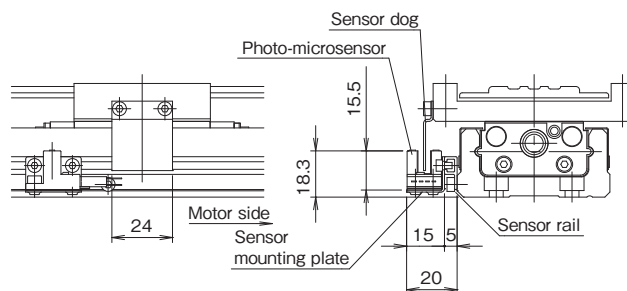


Symbol K (NPN) / E (PNP): Proximity sensor (Azbil)

Without dustproof cover

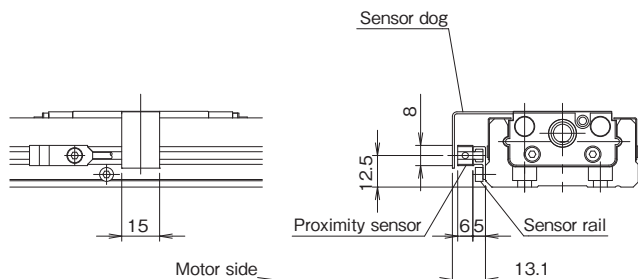


With dustproof cover

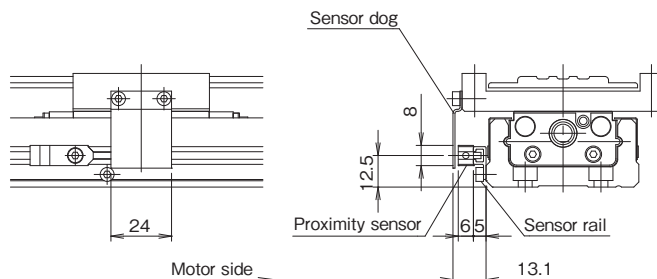

● SENSOR RAIL

Sensor rails only available with no sensors.

Sensor rail No. 1

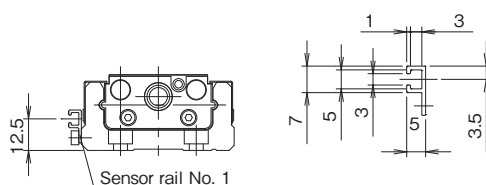


SE30


● DOWEL PIN HOLE

Dowel pin holes are applicable on the slide blocks with part number "PS", sub-tables "PR" or slide blocks and sub-tables "PSR". For actuators with 2 blocks, they are on both driving-side block and driven-side block. Please note that dowel pins are not equipped.


Long block without dustproof cover with "PS"

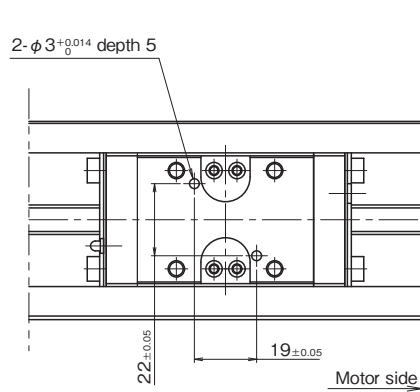

Long block with dustproof cover with "PS"

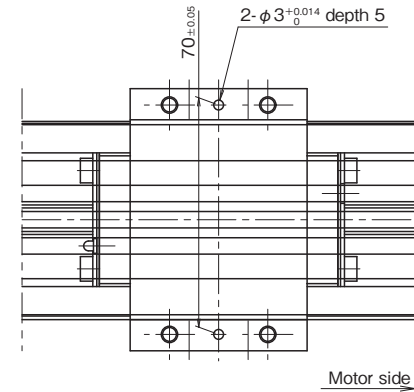

Guide rail with "PR"

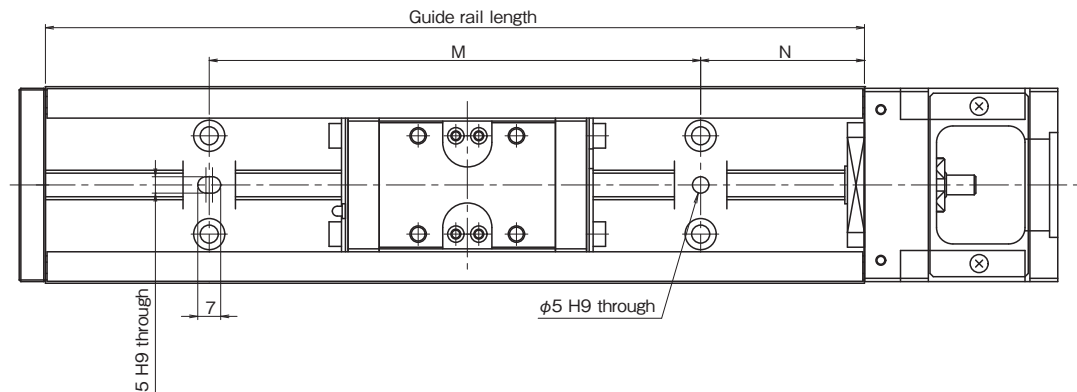

(Unit: mm)


Guide rail length	N	M	Dowel pin height
150	25	100	Less than 8
200	50	100	
300		200	
400		300	
500		400	
600		500	
700		600	
750	25	700	

Notice: In case dowel pin is stuck out from the U-guide rail, it may interfere with and break the slide block.


SE45

● LONG BLOCK CONFIGURATIONS


With 1 long block: A (With 2 long blocks: B)

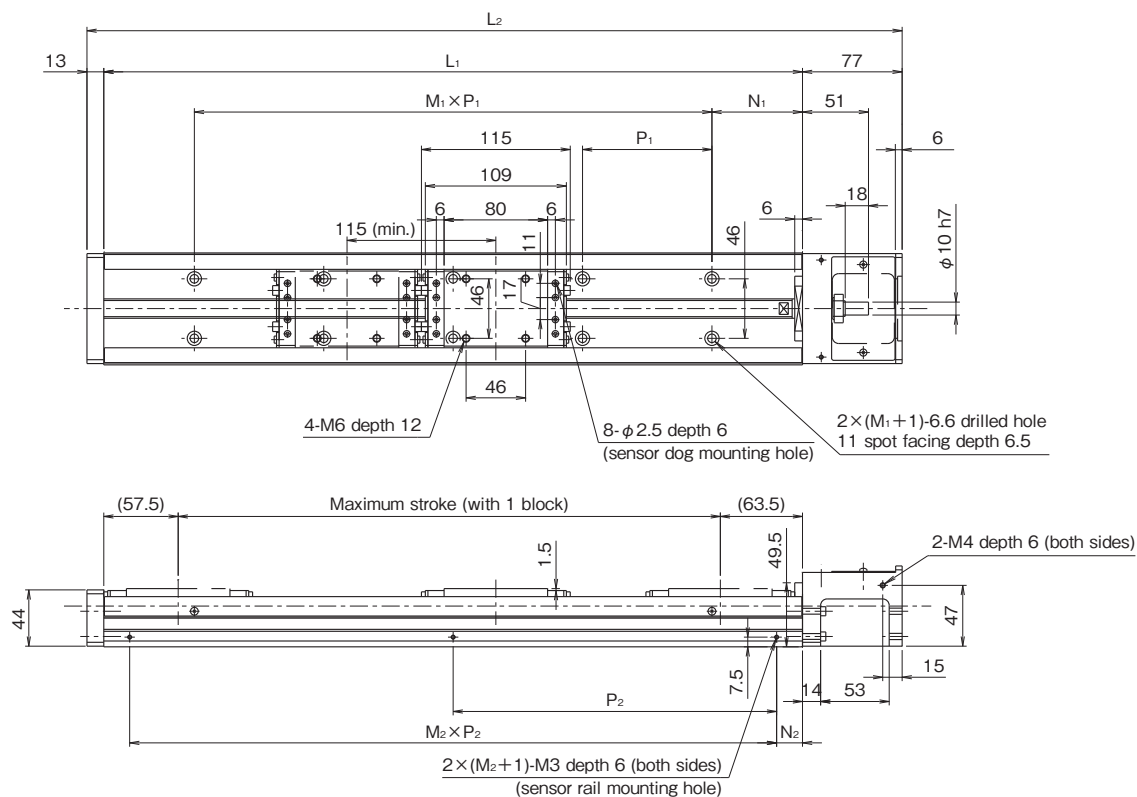


With dustproof cover

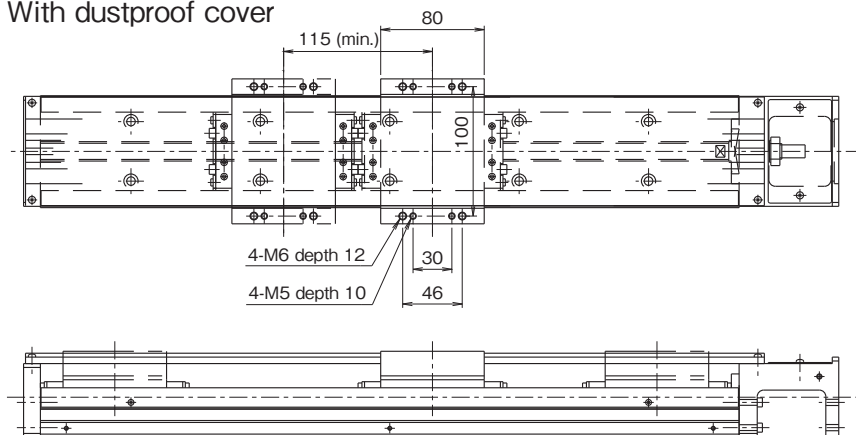

Without cover



With dustproof cover



SE45

● LONG BLOCK DIMENSIONS

(Unit: mm)

Guide rail length L ₁	Overall lentg L ₂	N ₁	M ₁ ×P ₁	N ₂	M ₂ ×P ₂	Maximum stroke		Maximum stroke		Minimum stroke (with LUBSEAL)
						Long block		Long block (with LUBSEAL)		
						A: 1 block	B: 2 blocks	E: 1 block	F: 2 blocks	
340	430	70	2×100	20	1×300	219	104	211	—	123
440	530		3×100		1×400	319	204	311	188	
540	630		4×100		2×250	419	304	411	288	
640	730		5×100		2×300	519	404	511	388	
740	830		6×100		2×350	619	504	611	488	
840	930		7×100		2×400	719	604	711	588	
940	1030		8×100		3×300	819	704	811	688	

● PERMISSIBLE SPEED / MASS

Guide rail length L_1 (mm)	Permissible speed (mm/s)			Mass (kg)					
	Lead			Without cover		With cover		Slide block	
	5mm	10mm	20mm	A	B	A	B	Without cover	With cover
340	260	520	1040	6	6.9	6.9	8.1	0.86	1.19
440				7.3	8.2	8.3	9.5		
540				8.5	9.4	9.6	10.9		
640				9.8	10.7	11	12.2		
740				11	11.9	12.4	13.6		
840				12.3	13.2	13.8	15		
940	200	410	830	13.5	14.4	15.1	16.4		

(Note 1) The mass indicated in the columns "Without cover" and "With cover" in the above table includes the mass of slide block.

(Note 2) For long rail configurations, please consult KURODA.

SE45

● SHORT BLOCK DIMENSIONS

(Unit: mm)

Guide rail length L ₁	Overall lengt L ₂	N ₁	M ₁ × P ₁	N ₂	M ₂ × P ₂	Maximum stroke		Maximum stroke		Minimum stroke (with LUBSEAL)
						Short block		Short block (with LUBSEAL)		
						C: 1 block	D: 2 blocks	G: 1 block	H: 2 blocks	
340	430	70	2 × 100	20	1 × 300	249	164	241	148	93
440	530		3 × 100		1 × 400	349	264	341	248	
540	630		4 × 100		2 × 250	449	364	441	348	
640	730		5 × 100		2 × 300	549	464	541	448	
740	830		6 × 100		2 × 350	649	564	641	548	
840	930		7 × 100		2 × 400	749	664	741	648	
940	1030		8 × 100		3 × 300	849	764	841	748	

● PERMISSIBLE SPEED / MASS

Guide rail length L_1 (mm)	Permissible speed (mm/s)			Mass (kg)					
	Lead			Without cover		With cover		Slide block	
	5mm	10mm	20mm	C	D	C	D	Without cover	With cover
340	260	520	1040	5.7	6.3	6.5	7.2	0.58	0.79
440				7	7.6	7.8	8.6		
540				8.2	8.8	9.2	10		
640				9.5	10.1	10.6	11.4		
740				10.7	11.3	12	12.8		
840				12	12.6	13.3	14.1		
940	200	410	830	13.2	13.8	14.7	15.5		


(Note 1) The mass indicated in the columns "Without cover" and "With cover" in the above table includes the mass of slide block.

(Note 2) For long rail configurations, please consult KURODA.


SE45

● LONG BLOCK SUB GUIDE RAIL CONFIGURATIONS


With 1 long block: A (With 2 long blocks: B)

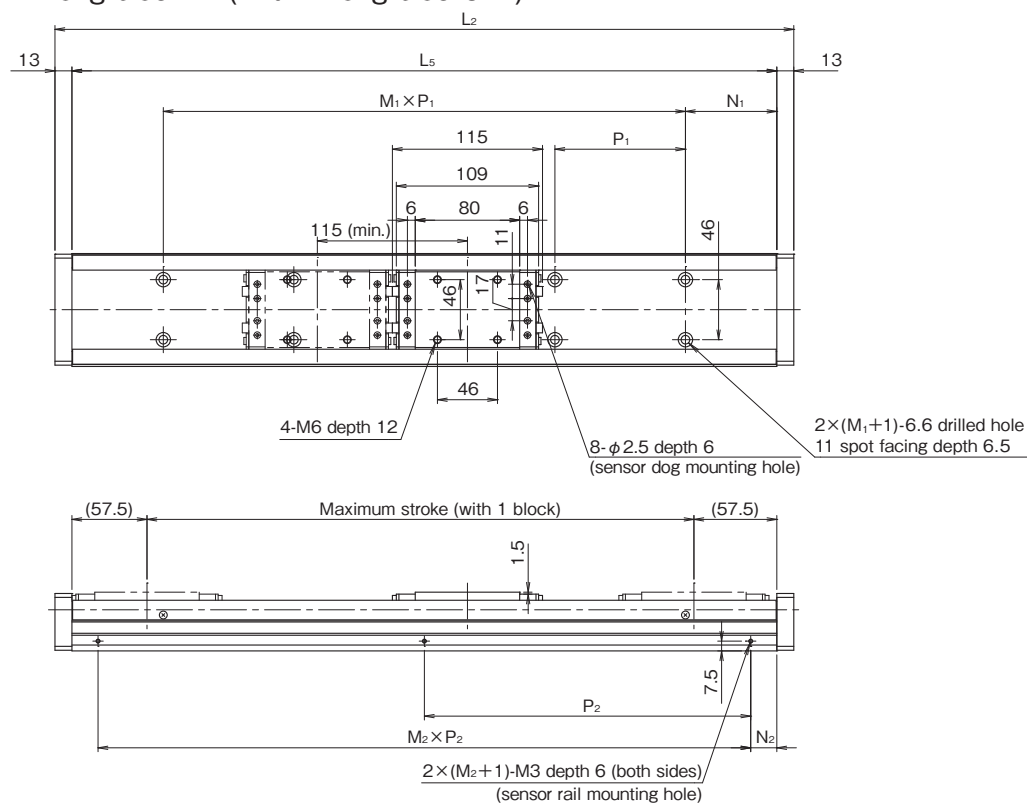


With dustproof cover

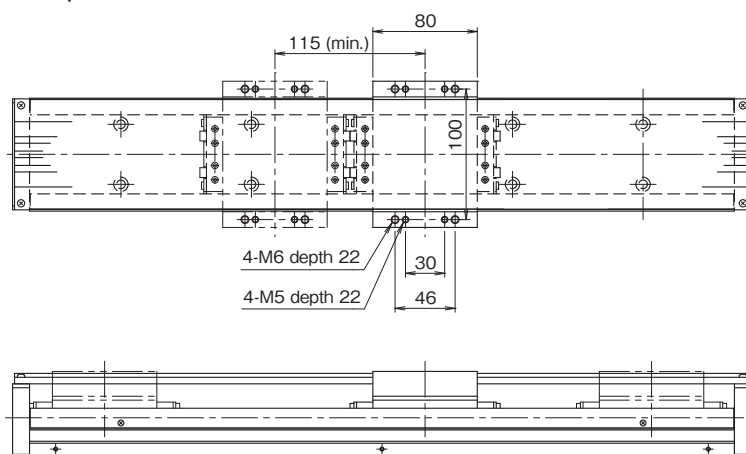

Without cover



With dustproof cover



SE45

● LONG BLOCK SUB GUIDE RAIL DIMENSIONS

(Unit: mm)

Guide rail length L ₁	Overall lengt L ₂	N ₁	M ₁ × P ₁	N ₂	M ₂ × P ₂	Maximum stroke		Maximum stroke		Minimum stroke (with LUBSEAL)
						Long block		Long block (with LUBSEAL)		
						A: 1 block	B: 2 blocks	E: 1 block	F: 2 blocks	
340	430	70	2 × 100	20	1 × 300	225	110	217	—	123
440	530		3 × 100		1 × 400	325	210	317	194	
540	630		4 × 100		2 × 250	425	310	417	294	
640	730		5 × 100		2 × 300	525	410	517	394	
740	830		6 × 100		2 × 350	625	510	617	494	
840	930		7 × 100		2 × 400	725	610	717	594	
940	1030		8 × 100		3 × 300	825	710	817	694	

● PERMISSIBLE SPEED / MASS

Guide rail length L_1 (mm)	Permissible speed (mm/s)	Mass (kg)					
		Without cover		With cover		Slide block	
		A	B	A	B	Without cover	With cover
340	2000	5.6	6.5	6.4	7.7	0.86	1.19
440		6.7	7.6	7.7	8.9		
540		7.8	8.7	8.9	10.2		
640		8.9	9.8	10.2	11.4		
740		10.1	11.0	11.4	12.7		
840		11.2	12.1	12.7	13.9		
940		12.3	13.2	13.9	15.2		


(Note 1) The mass indicated in the columns "Without cover" and "With cover" in the above table includes the mass of slide block.

(Note 2) For long rail configurations, please consult KURODA.


SE45

● SHORT BLOCK SUB GUIDE RAIL CONFIGURATIONS


With 1 short block: C (With 2 short blocks: D)

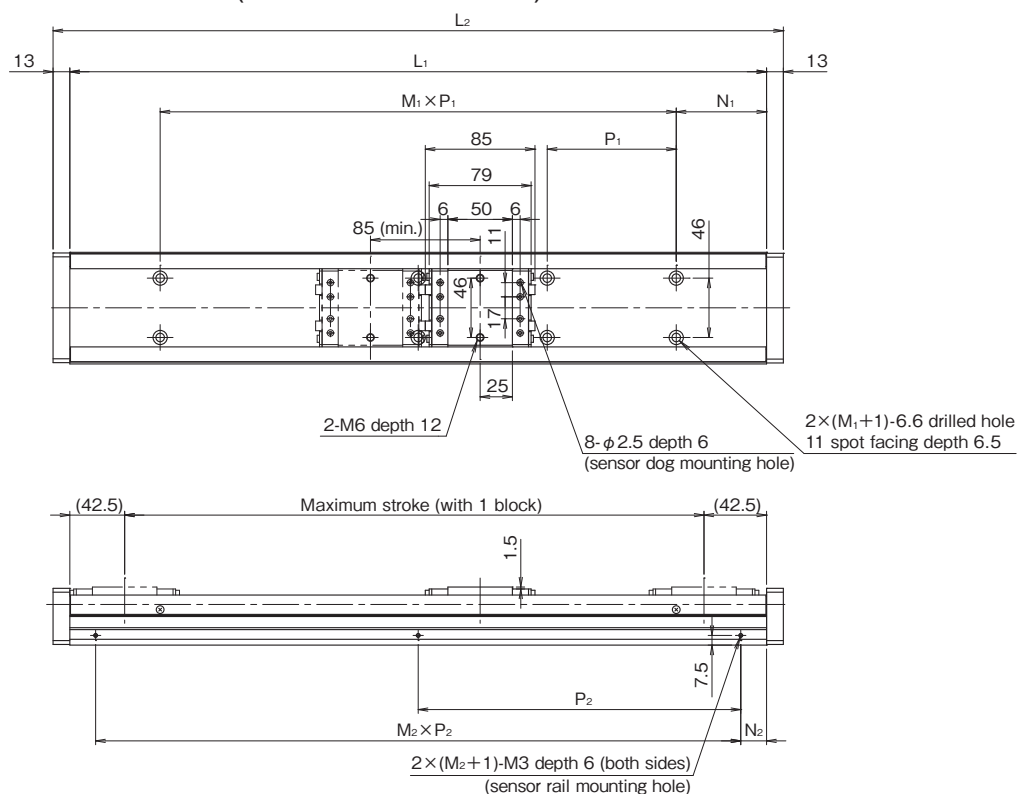


With dustproof cover

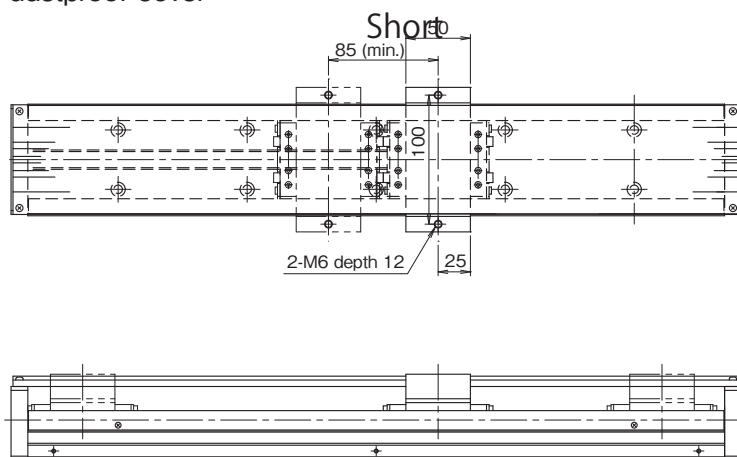

Without cover



With dustproof cover



SE45

● SHORT BLOCK SUB GUIDE RAIL DIMENSIONS

(Unit: mm)

Guide rail length L ₁	Overall lentg L ₂	N ₁	M ₁ × P ₁	N ₂	M ₂ × P ₂	Maximum stroke		Maximum stroke		Minimum stroke (with LUBSEAL)
						Short block		Short block (with LUBSEAL)		
						C: 1 block	D: 2 blocks	G: 1 block	H: 2 blocks	
340	430	70	2 × 100	20	1 × 300	255	170	247	154	93
440	530		3 × 100		1 × 400	355	270	347	254	
540	630		4 × 100		2 × 250	455	370	447	354	
640	730		5 × 100		2 × 300	555	470	547	454	
740	830		6 × 100		2 × 350	655	570	647	554	
840	930		7 × 100		2 × 400	755	670	747	654	
940	1030		8 × 100		3 × 300	855	770	847	754	

● PERMISSIBLE SPEED / MASS

Guide rail length L_1 (mm)	Permissible speed (mm/s)	Mass (kg)					
		Without cover		With cover		Slide block	
		A	B	A	B	Without cover	With cover
340	2000	5.3	5.9	6.0	6.6	0.58	0.79
440		6.4	7.0	7.2	7.8		
540		7.5	8.1	8.5	9.1		
640		8.6	9.2	9.7	10.3		
740		9.8	10.4	11.0	11.6		
840		10.9	11.5	12.2	12.8		
940		12.0	12.6	13.5	14.1		


(Note 1) The mass indicated in the columns "Without cover" and "With cover" in the above table includes the mass of slide block.

(Note 2) For long rail configurations, please consult KURODA.


SE45

● MOTOR BRACKET CONFIGURATIONS

Motor bracket configuration: A0

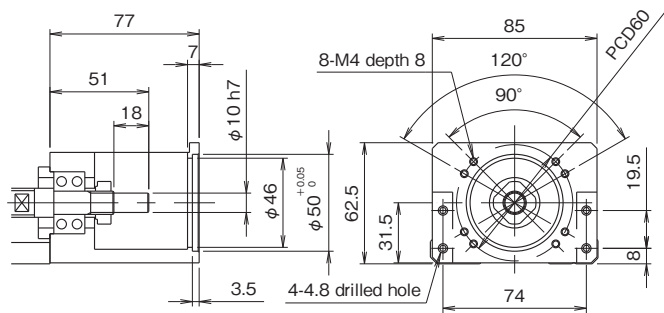

Motor bracket configuration: RN

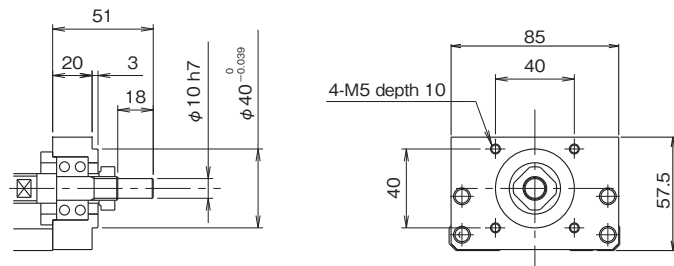


Mass of the RN configuration is 0.26 kg less than the values shown in the tables on pages 85 and 87.


SE45

● MOTOR BRACKET CONFIGURATIONS (INTERMEDIATE FLANGE)


Motor bracket configuration: A1 (mass: 53g)

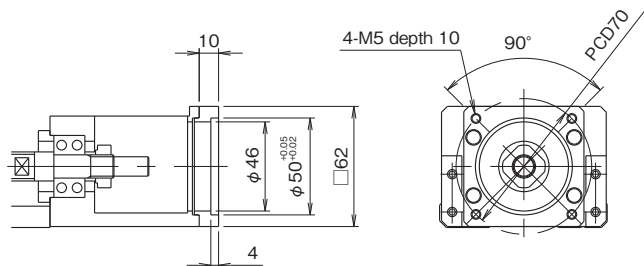


Motor bracket configuration: A4 (mass: 73g)

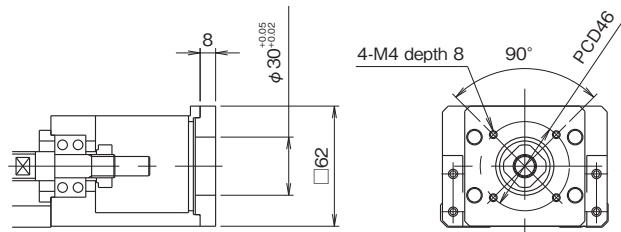


Motor bracket configuration: A2 (mass: 53g)

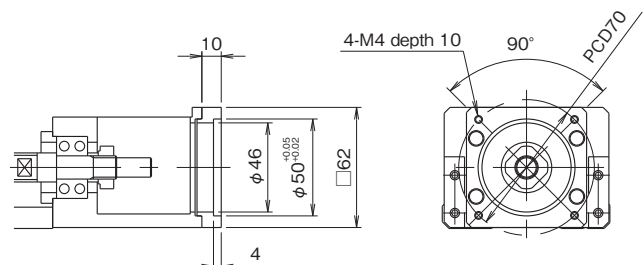


Motor bracket configuration: A5 (mass: 73g)

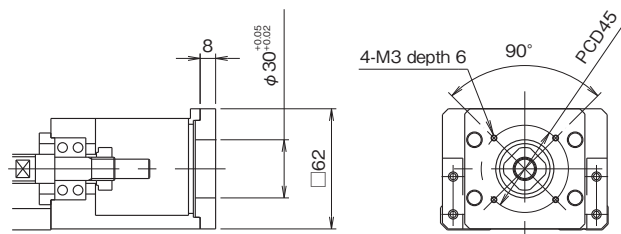

Motor bracket configuration: A3 (mass: 103g)

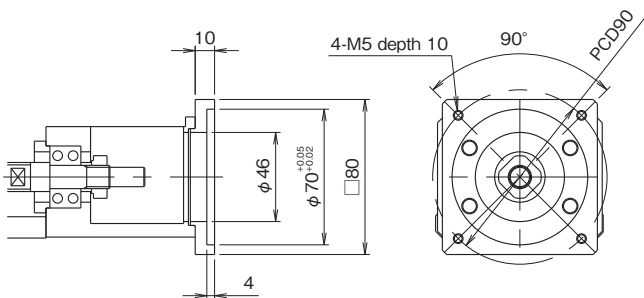

Motor bracket configuration: A6 (mass: 64g)

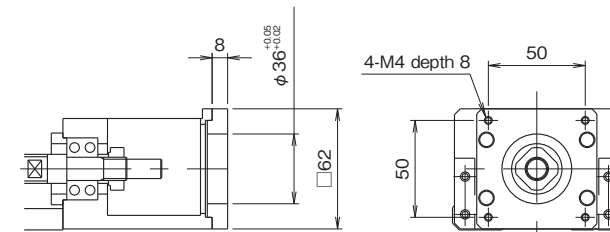


MOTOR BRACKET CONFIGURATIONS AND MOTOR OPTION

Motor option					Motor bracket configuration	Recommended coupling
Motor type	Maker	Series	Model No.	Output		
AC SERVO motor	PANASONIC	MINAS E	MUMA02	200W	A2	SFC-030DA2 (MIKI PULLEY)
			MUMA04	400W		ACD-34A (ISEL)
		MINAS A5	MSME5A	50W	A5	SFC-020DA2 (MIKI PULLEY)
			MSME01	100W		ACD-27A (ISEL)
			MSME02	200W	A2	SFC-030DA2 (MIKI PULLEY)
			MSME04	400W		ACD-34A (ISEL)
			MSME08	750W	A3	SFC-040DA2 (MIKI PULLEY)
		MINAS A6	MSMF5A	50W	A5	SFC-020DA2 (MIKI PULLEY)
			MSMF01	100W		ACD-27A (ISEL)
			MSMF02	200W	A2	SFC-030DA2 (MIKI PULLEY)
			MSMF04	400W		ACD-34A (ISEL)
			MSMF08	750W	A3	SFC-040DA2 (MIKI PULLEY)
	MITSUBISHI ELECTRIC	MELSERVO J3	HF-KP (MP) 053	50W	A4	SFC-020DA2 (MIKI PULLEY)
			HF-KP (MP) 13	100W		ACD-27A (ISEL)
			HF-KP (MP) 23	200W	A1	SFC-030DA2 (MIKI PULLEY)
			HF-KP (MP) 43	400W		ACD-34A (ISEL)
		MELSERVO J4	HG-KR (MR) 053	50W	A4	SFC-020DA2 (MIKI PULLEY)
			HG-KR (MR) 13	100W		ACD-27A (ISEL)
			HG-KR (MR) 23	200W	A1	SFC-030DA2 (MIKI PULLEY)
			HG-KR (MR) 43	400W		ACD-34A (ISEL)
	YASKAWA ELECTRIC	Σ -V	SGMJV, SGMV-A5	50W	A4	SFC-020DA2 (MIKI PULLEY)
			SGMJV, SGMV-01	100W		ACD-27A (ISEL)
			SGMJV, SGMV-C2	150W	A1	SFC-030DA2 (MIKI PULLEY)
			SGMJV, SGMV-02	200W		ACD-34A (ISEL)
			SGMJV, SGMV-04	400W		SFC-035DA2 (MIKI PULLEY)
			SGMJV, SGMV-06	600, 550W		ACD-39A (ISEL)
		Σ -7	SGM7J, SGM7A-A5	50W	A4	SFC-020DA2 (MIKI PULLEY)
			SGM7J, SGM7A-01	100W		ACD-27A (ISEL)
			SGM7J, SGM7A-C2	150W	A1	SFC-030DA2 (MIKI PULLEY)
			SGM7J, SGM7A-02	200W		ACD-34A (ISEL)
			SGM7J, SGM7A-04	400W		SFC-035DA2 (MIKI PULLEY)
			SGM7J, SGM7A-06	600W		ACD-39A (ISEL)
	OMRON	G5	R88M-K05030	50W	A4	SFC-020DA2 (MIKI PULLEY)
			R88M-K10030	100W		ACD-27A (ISEL)
			R88M-K20030	200W	A2	SFC-030DA2 (MIKI PULLEY)
			R88M-K40030	400W		ACD-34A (ISEL)
	SANYO ELECTRIC	SANMOTION R	R2AA04005	50W	A4	SFC-020DA2 (MIKI PULLEY)
			R2AA04010	100W		ACD-27A (ISEL)
			R2AA06020	200W	A1	SFC-030DA2 (MIKI PULLEY)
			R2AA06040	400W		ACD-34A (ISEL)
Stepping motor	ORIENTAL MOTOR	α step	ARM6	□60mm	A6	SFC-020DA2 (MIKI PULLEY)
	SANYO ELECTRIC	5-Phase	F series □60mm	□60mm	A6	ACD-27A (ISEL)

- For motors other than above-mentioned, consult KURODA.
- When selecting a rigid type of coupling for connecting a motor, consult KURODA.
- For detailed specifications of above-mentioned motors and couplings, refer to catalogs or websites provided by the makers.

● PARALLEL MOTOR MOUNTING

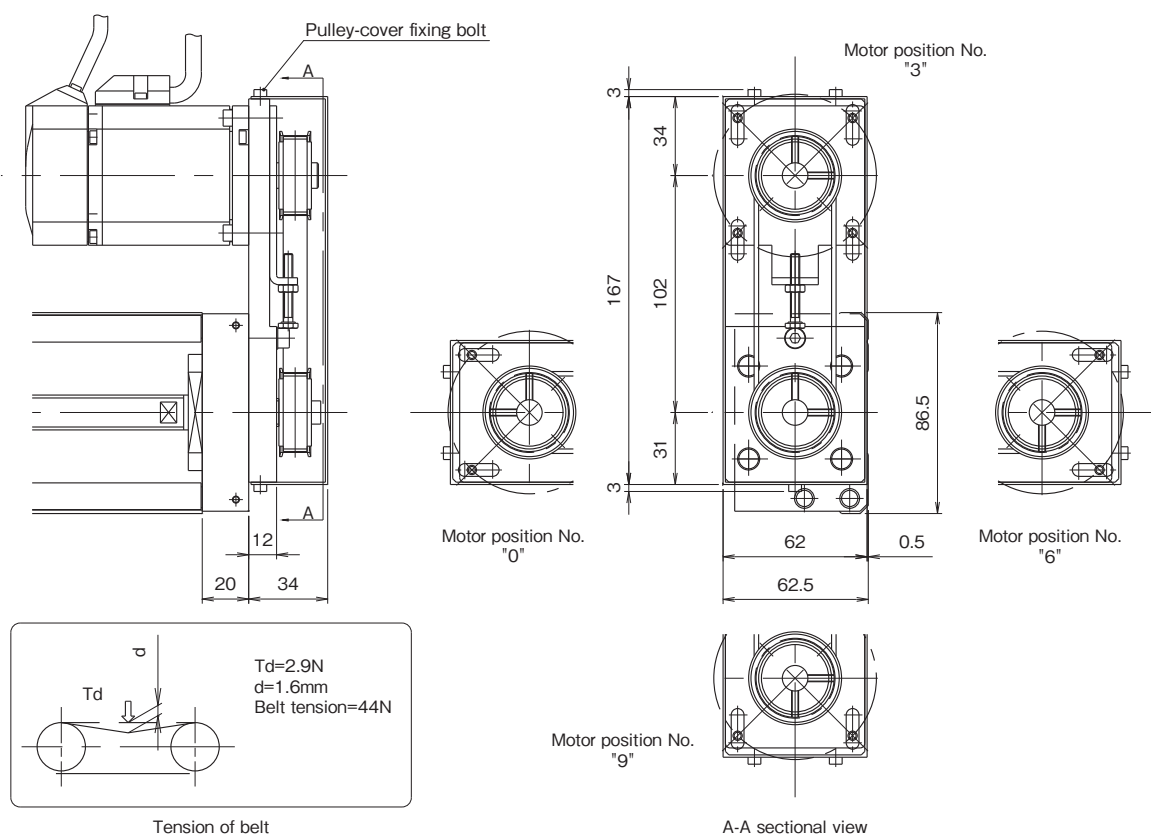


- Pulley unit position can be adjusted at every 90 degree.
- Fill motor position No. in ☐.
- If the pulley cover may not be removable due to restrictions arising from direction of the unit, consult KURODA for modifying positions of the pulley-cover fixing bolts (3 M3 cross recessed flat head machine screws).
- Motor parallel mounting can be equipped with dustproof cover and sensor.
- Although tension plate is attached inside the cover with standard specifications, it can also be attached to outside the cover. Consult KURODA for such modification.
- Tension plate position can be built in pulley cover.
- The mass is 0.7kg larger than the values shown in tables on pages 85 and 87.
- Inertia moment is $1.24 \times 10^{-5} \text{kg} \cdot \text{m}^2$ larger than the value shown in table on page 55.

Mark	Pulley Inner dia.	Applicable motor
E <input type="checkbox"/>	Inner dia. $\phi 11$	Panasonic 200W motor and so on
F <input type="checkbox"/>	Inner dia. $\phi 14$	Yaskawa 200W motor and so on
		Mitsubishi Electric 200W motor and so on
		Sanyo Electric 200W motor and so on
G <input type="checkbox"/>	Inner dia. $\phi 8$	Oriental Motor Stepping Motor <input type="checkbox"/> 60 series and so on"


Fullfill the motor position No. in ☐.

Check the spec. if the motor can be assembled before using.


Parallel motor mounting type E ☐
Tension plate dimension



Parallel motor mounting type F ☐
Tension plate dimension



Parallel motor mounting type G ☐
Tension plate dimension




SE45


● SENSOR

Symbol C (NPN) / P (PNP), M (NPN) / Y (PNP): Photo-microsensor (OMRON, Panasonic Industrial Devices SUNX)

Without dustproof cover

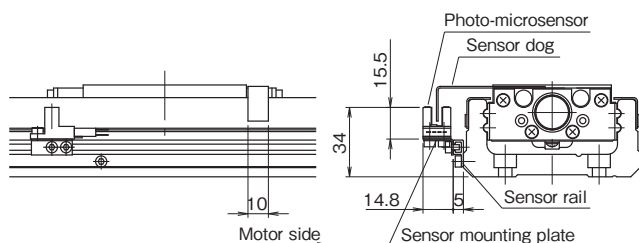


With dustproof cover

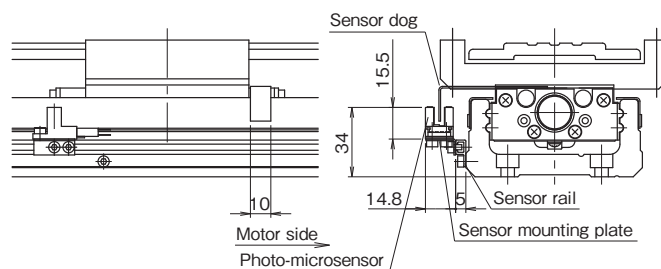


Symbol K (NPN) / E (PNP): Proximity sensor (Azbil)

Without dustproof cover

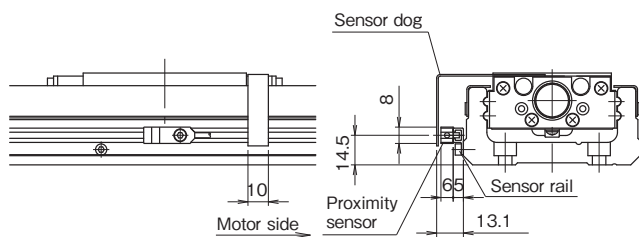


With dustproof cover

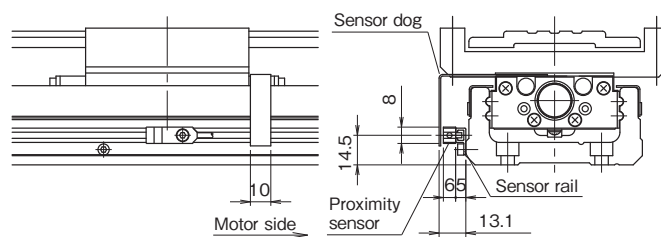

● SENSOR RAIL

Sensor rails only available with no sensors.

Sensor rail No. 1

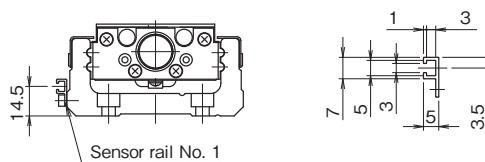


SE45

● DOWEL PIN HOLE


Dowel pin holes are applicable on the slide blocks with part number "PS", sub-tables "PR" or slide blocks and sub-tables "PSR". For an actuator with 2 blocks, they are on both driving-side block and driven-side block. Please note that dowel pins are not equipped.

Long block without dustproof cover with "PS"

For actuators with 2 blocks, the holes are on both blocks.

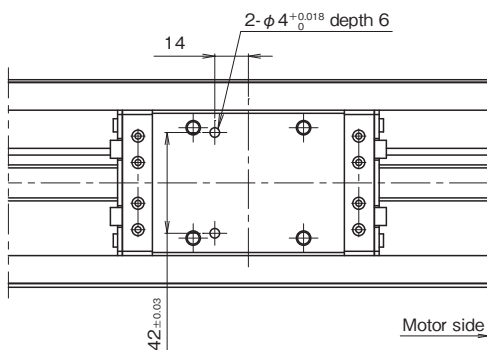


Long block with dustproof cover with "PS"

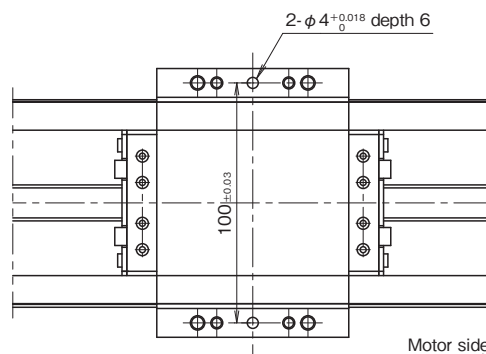


Short block without dustproof cover with "PS"


For actuators with 2 blocks, the holes are on both blocks.

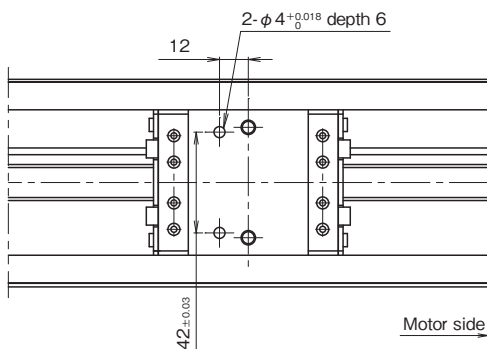

Short block with dustproof cover with "PS"

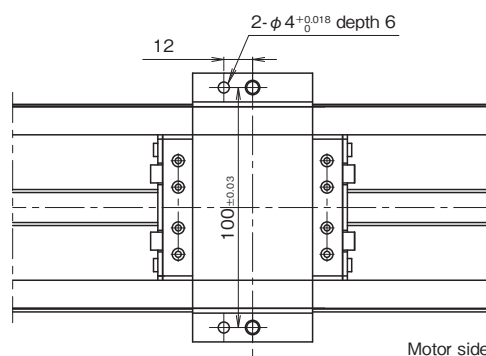

Guide rail with "PR"

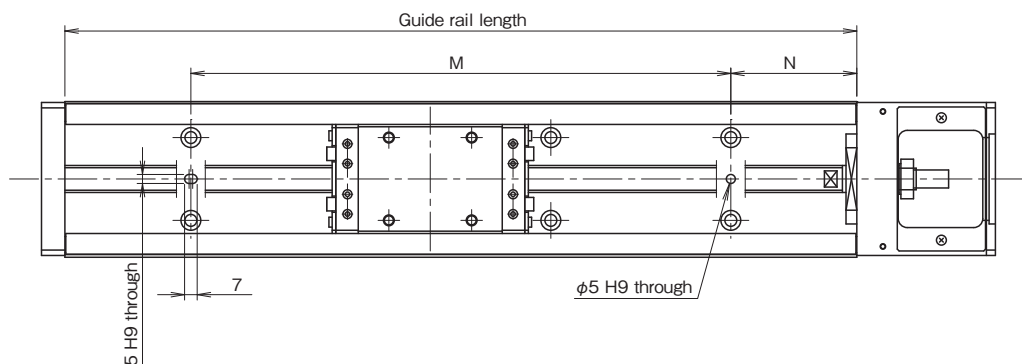

(Unit: mm)

Guide rail length	N	M	Dowel pin height
340	70	200	Less than 11
440		300	
540		400	
640		500	
740		600	
840		700	
940		800	

Notice: In case dowel pin is stuck out from the U-guide rail, it may interfere with and break the slide block.

PHOTO-MICROSENSOR/Panasonic Industrial Devices SUNX

● Specifications

Model No.	NPN output type PNP output type	PM-L25	PM-Y65 PM-Y65P
Sensing range		6mm (fixed)	
Minimum sensing object		0.8X1.2mm opaque object	
Hysteresis		0.05mm or less	
Repeatability		0.01mm or less	
Supply voltage		5 to 24V DC $\pm 10\%$ Ripple P-P 10% or less	
Current consumption		15mA or less	
Output		NPN output type: NPN transistor open collector Maximum sink current : 50mA Applied voltage : 30V DC or less (between output and 0V) Residual voltage : 2V or less (at 50mA sink current) 1V or less (at 16mA sink current)	NPN output type: NPN transistor open collector Maximum sink current : 50mA Applied voltage : 30V DC or less (between output and 0V) Residual voltage : 2V or less (at 50mA sink current) 1V or less (at 16mA sink current) PNP output type: PNP transistor open collector Maximum sink current : 50mA Applied voltage : 30V DC or less (between output and +V) Residual voltage : 2V or less (at 50mA sink current) 1V or less (at 16mA sink current)
Output operation		Incorporated with 2 outputs : Light-ON/Dark-ON	
Short-circuit protection		Incorporated	
Response time		Under light received condition : 20 μ s or less Under light shielded condition : 80 μ s or less (Maximum response frequency 3kHz)	
Operation indicator		Orange LED (lights up under light received condition)	
Pollution degree		3	
Environmental resistance	Protection	IP64 (IEC)	IP40 (IEC)
	Ambient temperature	-25 to +55°C : (No dew condensation or icing allowed), Storage: -30 to +80°C :	
	Ambient humidity	5 to 85% RH, Storage: 5 to 95% RH	
	Ambient illuminance	Fluorescent light : 1000lx or less at the light-receiving face	
	Voltage withstandability	1000V AC for 1 min. between all supply terminals connected together and enclosure	
	Insulation resistance	20M Ω or more with 250V DC megger between all supply terminals connected together and enclosure	
	Vibration resistance	10 to 2000Hz frequency, 1.5mm amplitude (maximum acceleration 196m/s ²) in X, Y and Z directions for 2 hours each	
	Shock resistance	15000m/s ² acceleration (1500G approx.) in X, Y and Z directions for 3 times each	
Emitting element		Infrared LED (Peak emission wavelength: 855nm (0.034mil), non-modulated)	
Material		Case: PBT Display: Polycarbonate	
Cable		0.09mm ² 4-core cabtyre cable, 1m long	-
Cable extension		Extension up to total 100m (328.084ft) is possible with 0.3mm ² , or more, cable.	Extension up to total 100m (328.084ft) is possible with 0.3mm ² , or more, cable.
Mass		Main body : 10g approx.	Main body : 3g approx.


Accessories	Specifications		
	S	M	Y
Sensor Model No.	PM-L25 (NPN) : 3	PM-Y65 (NPN) : 3	PM-Y65P (PNP) : 3
Sensor mounting plate (Note 1)	: 3	: 3	: 3
Sensor rail	: 1	: 1	: 1
Sensor dog (Note 2)	: 1	: 1	: 1
Connector for sensor	-	CN-14A : 3	CN-14A : 3

(Note 1) Sensor mounting plate is applied to SE and SC series.


(Note 2) 2 sensor dogs are used for SG33□ D-150 sensor with Symbol "M" or "Y".

● I/O circuit diagram

NPN output type

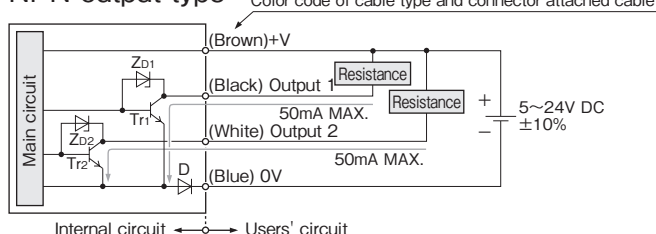


PNP output type

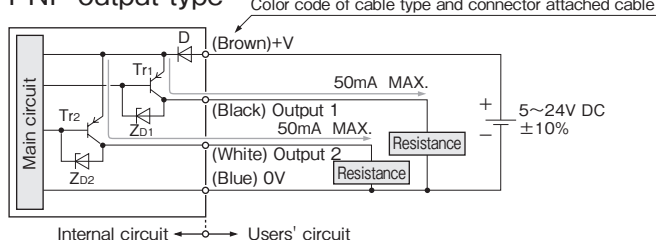


● Wiring diagram

NPN output type

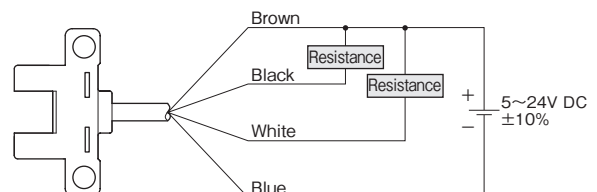

PNP output type

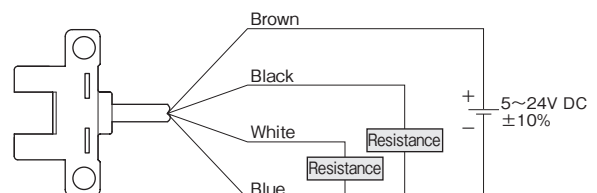

(Note) For detailed information and operating precautions, refer to catalogs and operating instructions supplied by the sensor maker.

PROXIMITY SENSOR/AzbiI


● Specifications

Model No.	NPN output type	APM-D3B1, APM-D3B1F (different-frequency type)
	PNP output type	APM-D3E1, APM-D3E1F (different-frequency type)
Sensing method		High-frequency oscillation type (unshielded type)
Rated supply voltage		DC 12/24V
Rated sensing distance		2.5mm \pm 15%
Usable sensing distance		0~1.8mm
Sensing object		15×15mm t=1mm Iron
Hysteresis		15% or less in sensing length
Operating voltage range		DC 10.8~26.4V(Ripple 10% or less)
Current consumption		10mA or less
Output type		NPN transistor open collector
		PNP transistor open collector
Operation mode		Normally closed (N.C.)
Control Output	Switching current	30mA or less (resistance load)
	Residual voltage	1V or less (switching current 30mA)
	Output dielectric strength	26.4V
Response frequency		120Hz
Repeatability		0.05mm or less
Temperature characteristics		\pm 15% max. for the range of -10 to +55°C when +25°C is taken as standard temperature in sensing distance
Supply voltage characteristics		\pm 2% max. with 10% voltage fluctuation with rated supply voltage as standard voltage in sensing distance
Operation indicator		Lights up in orange under light received condition
Ambient temperature		-10~+55°C
Ambient temperature at storage		-25~+70°C
Ambient humidity		35~85%RH
Insulation resistance		50M Ω or more (measured by DC 500V insulation ohmmeter)
Voltage withstandability		1000V AC, 50/60Hz for 1 min. between all supply terminals connected together and enclosure
Vibration resistance		10 to 55Hz, 1.5mm amplitude in X, Y, and Z directions for 2 hours each
Shock resistance		500m/s ² in X, Y, and Z directions for 3 times each
Protection		IP67 (IEC529)
Mass		10g approx.
Circuit protection		Surge absorption, reverse connection protection circuit (-S: load short protection)
Connection		Pre-leaded (oil-resistant cord: 2.5 mm O.D., 0.08 mm ² , 3-core, 1 m)
Case material		Polyarylate resin
Tightening torque		0.5N·m (M2.6 screw)

Accessories	Specifications	
	K	E
Sensor Model No.	APM-D3B1 (NPN) : 2	APM-D3E1 (PNP) : 2
	APM-D3B1F (NPN) : 1	APM-D3E1F (PNP) : 1
Sensor rail	: 1	: 1
Sensor dog	: 1	: 1

● Wiring diagram

NPN output type

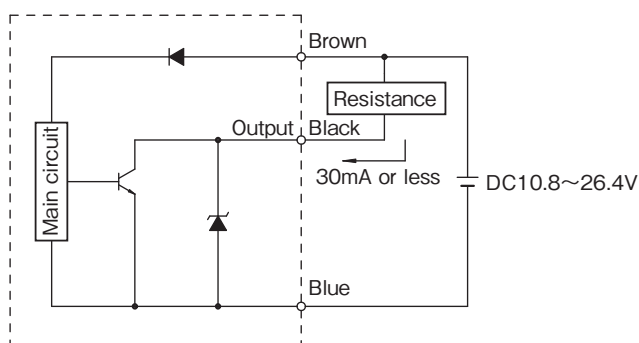

PNP output type

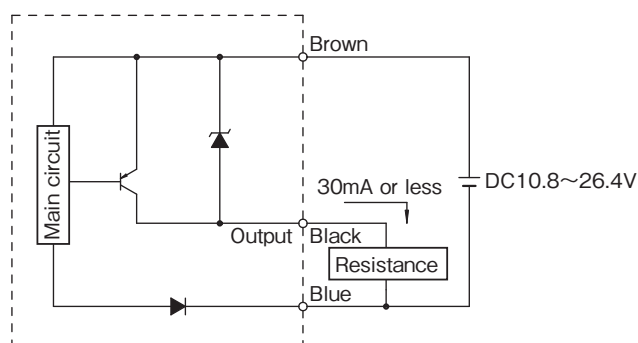


PHOTO-MICROSENSOR/OMRON

Specifications

Model No.	NPN output type	EE-SX674	EE-SX671
	PNP output type	EE-SX674P	EE-SX671P
Sensing range	5mm (slot width)		
Sensing object	Opaque object 2 x 0.8mm or more		
Hysteresis	0.025mm or less		
Light source (peak emission wavelength)	GaAs IRED (940 nm)		
Operation indicator	Lights up at light-received (Red LED)		
Supply voltage	5 to 24V DC±10% Ripple P-P 10% or less		
Current consumption	12mA and less (connector type, when to open L connector)		
Output	NPN output type: NPN transistor open collector Output : 5 to 24V DC 100mA or less Residual voltage : 0.8V or less (at 100mA load current), 0.4V or less (at 40mA load current) OFF-state current 0.5mA or less		
	PNP output type : PNP transistor open collector Output : 5 to 24V DC 50mA or less Residual voltage : 1.3V or less (at 50mA load current) OFF-state current 0.5mA or less		
Response frequency	1kHz or above (3kHz in average)		
Ambient illuminance	Fluorescent light : 1000 lx at the light-receiving face		
Ambient temperature	Operation: -25 to +55℃, Storage: -30 to +80℃ (no dew condensation or icing allowed)		
Ambient humidity	Operation: 5 to 85% RH, Storage: 5 to 95% RH (no dew condensation or icing allowed)		
Vibration resistance	20 to 2000Hz (100m/s ² peaked acceleration), 1.5mm amplitude in X, Y and Z directions for 2 hours each (4min. cycle)		
Shock resistance	500m/s ² in X, Y and Z directions for 3 times each		
Protection	IP50 IEC60529		
Connection	Connector (available for direct soldering)		
Mass	3g approx.		
Material	Case	Poly Butylene Terephthalate (PBT)	
	Cover		
	Terminal	Polycarbonate	

Accessories	Specifications			
	C	P	H (Note 2)	J (Note 2)
Sensor Model No.	EE-SX674 (NPN) : 3	EE-SX674P (PNP) : 3	EE-SX671 (NPN) : 3	EE-SX671P (PNP) : 3
Connector for sensor	EE-1001: 3	EE-1001: 3	EE-1001: 3	EE-1001: 3
Sensor rail	: 1	: 1	: 1	: 1
Sensor dog (Note 3)	: 1	: 1	: 1	: 1
Sensor mounting plate (Note 1)	: 3	: 3		


(Note 1) Sensor mounting plate is applied to SE and SC series.

(Note 2) If H or J configuration is used for the model without cover in SG33 series, a sensor mounting plate is attached in addition to the above-mentioned accessories.


(Note 3) 2 sensor dogs are used for SG33□D-150 sensor with Symbol "M" or "Y".

I/O circuit diagram

NPN output type

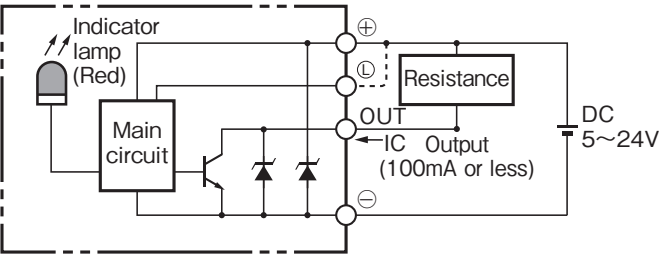

PNP output type

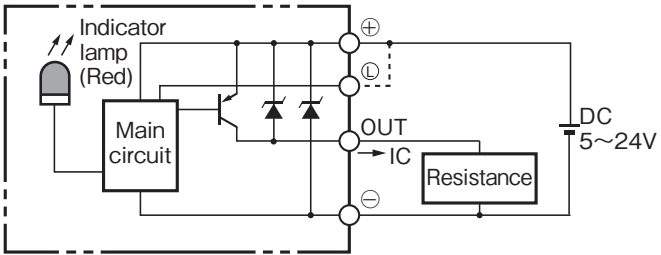

(Note) For detailed information and operating precautions, refer to catalogs and operating instructions supplied by the sensor maker.

CONTENTS

TECHNICAL DATA FOR BALLSCREW ACTUATORS

Ballscrew actuator selection guide	126
Expected-life design for guide	127-129
Expected-life design for ball screw and fixed side bearing	130
Example of selection ① For horizontal use	131
Example of selection ② For vertical use	132
Ballscrew actuator specification data sheet	133

SG

SG20

SG26

SG33

SG46

SG55

SE

SE15

SE23

SE30

SE45

SC

SC23

SC30


SC45

Sensor

Technical Data

BALLSCREW ACTUATOR SELECTION GUIDE

Similar to ball screw selections, there is no instant way of selecting appropriate ballscrew actuators for various purposes. The following is an example of general procedures in actuator selection, with some considerations to be made on each step and pages to refer to.

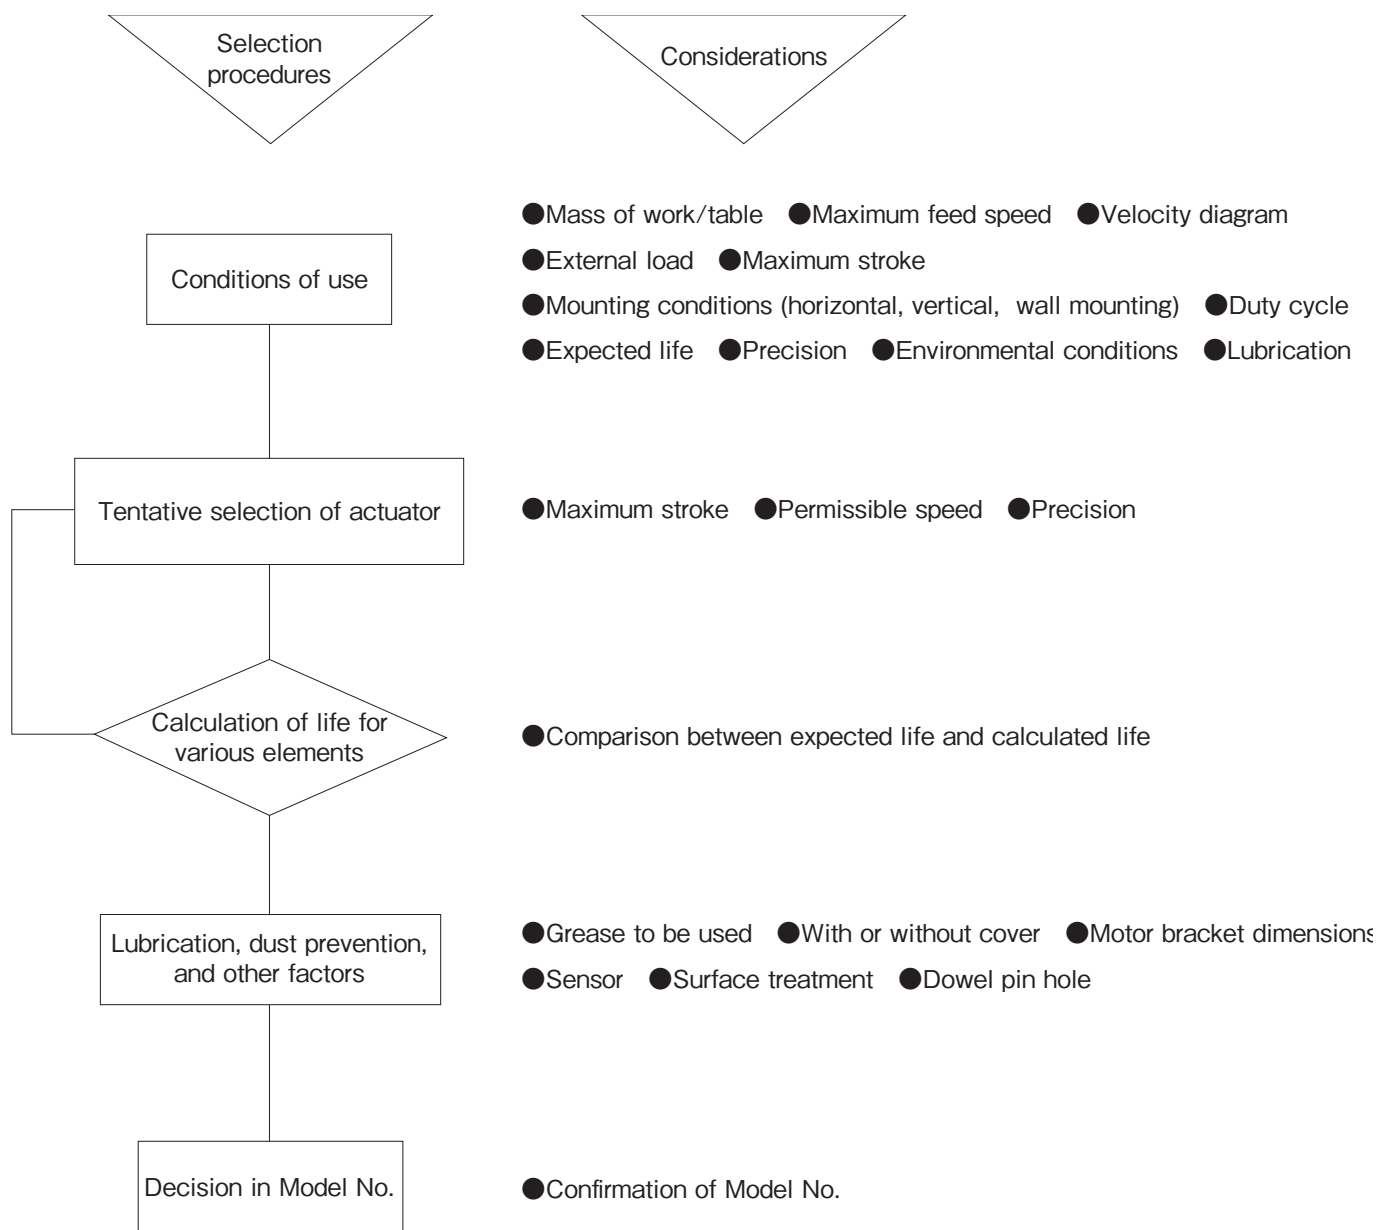

LIFE EXPECTANCY

The shortest life expectancy of among guid-rail, ballscrew and support bearing can be defined as the life expectancy of ballscrew actuators, SE, SG, and SC series.

The following formula is used to calculate the life expectancy.

LIFE EXPECTANCY OF GUIDE

Calculate the life expectancy of guide using the following formula:

$$L_G = \left(\frac{f_c}{f_w} \cdot \frac{C}{P_T} \right)^3 \cdot 50 \quad \text{Formula (1)}$$

L_G : Life expectancy operational length (km)

f_c : Contact factor (see Table 1)

f_w : Load factor (see Table 2)

C : Basic dynamic load rating (N)

P_T : Calculated load per block (N)

Calculation of P_T

To calculate the life expectancy using Formula (1), you need to obtain the calculated load per block (P_T) in consideration of actual moment load.

If the acceleration is high or short-stroke operation is conducted, calculate P_T in consideration of acceleration. This acceleration calculation is made for a mass loaded on SG, SE, and SC.

Obtain the calculated load in uniform motion, accelerated motion, and decelerated motion, and its average figure is used as P_T .

For the calculation of P_T , select a calculation formula according to the installation conditions.

If acceleration needs not to be considered,

$P_T = P_{TC}$ (See Formula (2), (5) and (8)) can be used for calculation. However, you can calculate only the approximate value in this formula, therefore it is recommended that you calculate the life expectancy with an ample margin.

Table 1 Contact factor (f_c)

Number of blocks to be used in contact, when single axis module is used.	Contact factor (f_c)
1	1.0
2	0.81

Table 2 Load factor (f_w)

Operating condition		Load factor (f_w)
Vibration and shock	Speed	
Zero	250mm/s or less	1.0~1.5
Small	1000mm/s or less	1.0~2.0
Large	1000mm/s or more	2.0~3.5

Table 3 Moment equivalent factor

	Ep(E2p)	Ey(E2p)	Er(E2r)
SG20**A	2.25×10^{-1}	1.89×10^{-1}	7.84×10^{-2}
SG20**B	3.98×10^{-2}	3.34×10^{-2}	3.92×10^{-2}
SG26**A	1.51×10^{-1}	1.27×10^{-1}	5.88×10^{-2}
SG26**B	2.72×10^{-2}	2.28×10^{-2}	2.94×10^{-2}
SG33**A	1.26×10^{-1}	1.06×10^{-1}	4.55×10^{-2}
SG33**B	2.20×10^{-2}	1.84×10^{-2}	2.27×10^{-2}
SG33**C	2.31×10^{-1}	1.94×10^{-1}	4.55×10^{-2}
SG33**D	3.09×10^{-2}	2.59×10^{-2}	2.27×10^{-2}
SG46**A	8.39×10^{-2}	7.04×10^{-2}	3.17×10^{-2}
SG46**B	1.56×10^{-2}	1.31×10^{-2}	1.59×10^{-2}
SG46**C	1.39×10^{-1}	1.17×10^{-1}	3.17×10^{-2}
SG46**D	2.15×10^{-2}	1.18×10^{-2}	1.59×10^{-2}
SG55**A	6.80×10^{-2}	5.71×10^{-2}	2.74×10^{-2}
SG55**B	1.35×10^{-2}	1.14×10^{-2}	1.37×10^{-2}
SE15**A	2.70×10^{-1}	2.45×10^{-1}	9.64×10^{-2}
SE15**B	4.50×10^{-2}	3.80×10^{-2}	4.82×10^{-2}
SE23**A	1.52×10^{-1}	1.37×10^{-1}	5.22×10^{-2}
SE23**B	2.54×10^{-2}	2.29×10^{-2}	2.61×10^{-2}
SE30**A	1.17×10^{-1}	9.83×10^{-2}	4.54×10^{-2}
SE30**B	1.95×10^{-2}	1.64×10^{-2}	2.27×10^{-2}
SE45**A	8.39×10^{-2}	7.04×10^{-2}	3.17×10^{-2}
SE45**B	1.56×10^{-2}	1.31×10^{-2}	1.59×10^{-2}
SE45**C	1.26×10^{-1}	1.06×10^{-1}	3.17×10^{-2}
SE45**D	2.10×10^{-2}	1.76×10^{-2}	1.59×10^{-2}
SC23**A	1.52×10^{-1}	1.37×10^{-1}	5.22×10^{-2}
SC30**A	1.17×10^{-1}	9.83×10^{-2}	4.54×10^{-2}
SC45**A	8.39×10^{-2}	7.04×10^{-2}	3.17×10^{-2}

(Note) The specifications of a model with two blocks show factors when the two blocks are used in contact.

● P_T in the case of Horizontal Movement (Horizontal Installation)

① For uniform motion (P_{TC})

$$P_{TC} = \frac{1}{n} \cdot W + Ep \cdot M_{pL} + Ey \cdot M_{yL} + Er \cdot M_{rL} \text{——Formula (2)}$$

② For accelerated motion (P_{Ta})

$$P_{Ta} = \frac{1}{n} \cdot W + Ep (M_{pL} + m \cdot a_a \cdot Z) + Ey (M_{yL} + m \cdot a_a \cdot X) + Er \cdot M_{rL} \text{——Formula (3)}$$

If item $(M_{pL} + m \cdot a_a \cdot Z)$ or $(M_{yL} + m \cdot a_a \cdot X)$ is a negative value, the value should be set to 0.

③ For decelerated motion (P_{Td})

$$P_{Td} = \frac{1}{n} \cdot W + Ep (M_{pL} + m \cdot a_d \cdot Z) + Ey (M_{yL} + m \cdot a_d \cdot X) + Er \cdot M_{rL} \text{——Formula (4)}$$

If item $(M_{pL} + m \cdot a_d \cdot Z)$ or $(M_{yL} + m \cdot a_d \cdot X)$ is a negative value, the value should be set to 0.

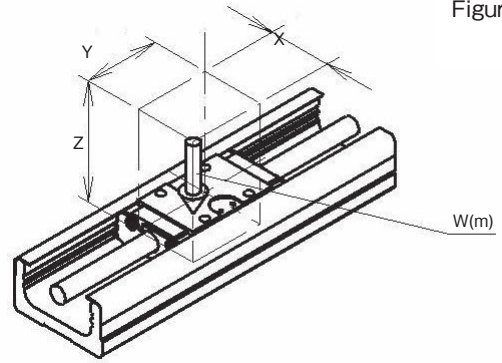


Figure 1

If a load is applied from a different direction other than W (m) in this figure, contact KURODA.

P_{TC} : Calculated load per block in uniform motion (N)

P_{Ta} : Calculated load per block in accelerated motion (N)

P_{Td} : Calculated load per block in decelerated motion (N)

n : Number of block of SG / SE / SC

W : Load (N)

m : Load mass (kg)

a_a : Acceleration in accelerated motion (m/sec²)

a_d : Acceleration in decelerated motion (m/sec²) (with a minus sign)

X : Distance from center of SG / SE / SC to center of gravity of loaded mass (mm)

Y : Distance from center of SG / SE / SC to center of gravity of loaded mass (mm)

Z : Distance from center of SG / SE / SC ballscrew to center of gravity of loaded mass (mm)

E_p : Moment equivalent factor in pitching direction (see Table 3)

E_y : Moment equivalent factor in yawing direction (see Table 3)

E_r : Moment equivalent factor in rolling direction (see Table 3)

M_{pL} : Load moment in pitching direction (N·mm)

$$M_{pL} = W \cdot Y$$

M_{yL} : Load moment in yawing direction (N·mm)

$$M_{yL} = 0 \text{ (The load moment is zero under this usage.)}$$

M_{rL} : Load moment in rolling direction (N·mm)

$$M_{rL} = W \cdot X$$

(Note) For the moment directions, see Pages 3, 53 and 101.

● P_T in the Case of Horizontal Movement (Wall Installation)

① For uniform motion (P_{TC})

$$P_{TC} = \frac{1}{1.19 \cdot n} \cdot W + Ep \cdot M_{pL} + Ey \cdot M_{yL} + Er \cdot M_{rL} \text{——Formula (5)}$$

② For accelerated motion (P_{Ta})

$$P_{Ta} = \frac{1}{1.19 \cdot n} \cdot W + Ep (M_{pL} + m \cdot a_a \cdot Z) + Ey (M_{yL} + m \cdot a_a \cdot X) + Er \cdot M_{rL} \text{——Formula (6)}$$


If item $(M_{pL} + m \cdot a_a \cdot Z)$ or $(M_{yL} + m \cdot a_a \cdot X)$ is a negative value, the value should be set to 0.

③ For decelerated motion (P_{Td})

$$P_{Td} = \frac{1}{1.19 \cdot n} \cdot W + Ep (M_{pL} + m \cdot a_d \cdot Z) + Ey (M_{yL} + m \cdot a_d \cdot X) + Er \cdot M_{rL} \text{——Formula (7)}$$

If item $(M_{pL} + m \cdot a_d \cdot Z)$ or $(M_{yL} + m \cdot a_d \cdot X)$ is a negative value, the value should be set to 0.

Figure 2

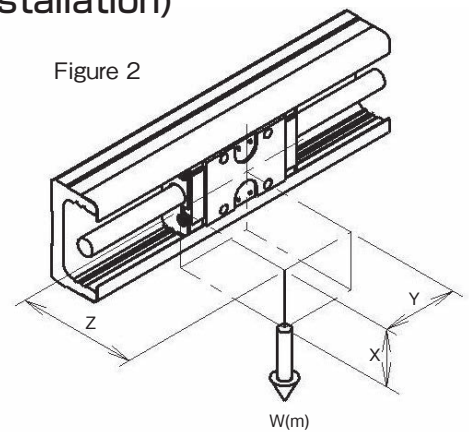

If load is applied from a different direction other than W (m), contact KURODA.

P_{TC} : Calculated load per block in uniform motion (N)

P_{Ta} : Calculated load per block in accelerated motion (N)

P_{Td} : Calculated load per block in decelerated motion (N)

n : Number of block of SG / SE / SC

W : Load (N)

m : Load mass (kg)

a_a : Acceleration in accelerated motion (m/sec²)

a_d : Acceleration in decelerated motion (m/sec²) (with a minus sign)

X : Distance from center of SG / SE / SC to center of gravity of loaded mass (mm)

Y : Distance from center of SG / SE / SC to center of gravity of loaded mass (mm)

Z : Distance from center of SG / SE / SC ballscrew to center of gravity of loaded mass (mm)

E_p : Moment equivalent factor in pitching direction (see Table 3)

E_y : Moment equivalent factor in yawing direction (see Table 3)

E_r : Moment equivalent factor in rolling direction (see Table 3)

M_{pL} : Load moment in pitching direction (N·mm)

$$M_{pL} = 0 \text{ (The load moment is zero under this usage.)}$$

M_{yL} : Load moment in yawing direction (N·mm)

$$M_{yL} = W \cdot Y$$

M_{rL} : Load moment in rolling direction (N·mm)

$$M_{rL} = W \cdot Z$$

(Note) For the moment directions, see Pages 3, 53 and 101.

● P_T in the Case of Vertical Movement

① For uniform motion (P_{TC})

$$P_{TC} = E_p \cdot M_{pL} + E_y \cdot M_{yL} + E_r \cdot M_{rL} \text{——Formula (8)}$$

② For accelerated motion (P_{Ta})

$$P_{Ta} = E_p (M_{pL} + m \cdot a_a \cdot Z) + E_y (M_{yL} + m \cdot a_a \cdot X) + E_r \cdot M_{rL} \text{——Formula (9)}$$

If item $(M_{pL} + m \cdot a_a \cdot Z)$ or $(M_{yL} + m \cdot a_a \cdot X)$ is a negative value, the value should be set to 0.

③ For decelerated motion (P_{Td})

$$P_{Td} = E_p (M_{pL} + m \cdot a_d \cdot Z) + E_y (M_{yL} + m \cdot a_d \cdot X) + E_r \cdot M_{rL} \text{——Formula (10)}$$

If item $(M_{pL} + m \cdot a_d \cdot Z)$ or $(M_{yL} + m \cdot a_d \cdot X)$ is a negative value, the value should be set to 0.

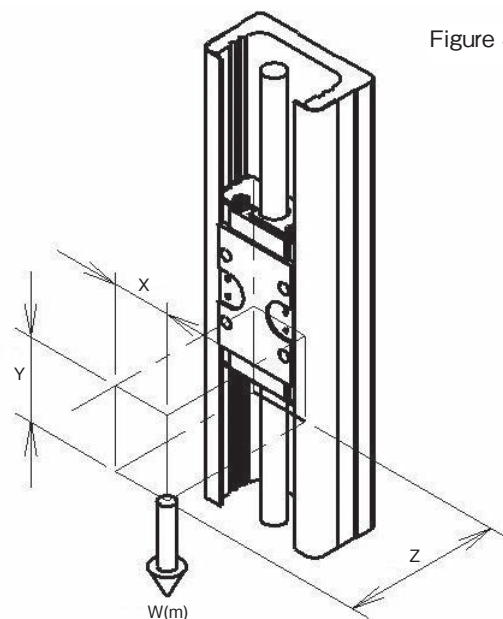


Figure 3

If load is applied from a different direction other than W (m) in this figure, contact KURODA.

P_{TC} : Calculated load per block in uniform motion (N)

P_{Ta} : Calculated load per block in accelerated motion (N)

P_{Td} : Calculated load per block in decelerated motion (N)

n : Number of block of SG / SE / SC

W : Load (N)

m : Load mass (kg)

a_a : Acceleration in accelerated motion (m/sec²)

a_d : Acceleration in decelerated motion (m/sec²) (with a minus sign)

X : Distance from center of SG / SE / SC to center of gravity of loaded mass (mm)

Y : Distance from center of SG / SE / SC to center of gravity of loaded mass (mm)

Z : Distance from center of SG / SE / SC ballscrew to center of gravity of loaded mass (mm)

E_p : Moment equivalent factor in pitching direction (see Table 3)

E_y : Moment equivalent factor in yawing direction (see Table 3)

E_r : Moment equivalent factor in rolling direction (see Table 3)

M_{pL} : Load moment in pitching direction (N·mm)

$$M_{pL} = W \cdot Z$$

M_{yL} : Load moment in yawing direction (N·mm)

$$M_{yL} = W \cdot X$$

M_{rL} : Load moment in rolling direction (N·mm)

$$M_{rL} = 0 \text{ (The load moment is zero under this usage.)}$$

(Note) For the moment directions, see Pages 3, 53 and 101.

● Using one of the above calculation formulas according to your usage, calculate average load in each motion to obtain calculated load per block (P_T).

$$P_T = \sqrt[3]{\frac{1}{(S1+S2+S3)} (P_{Ta}^3 \cdot S1 + P_{TC}^3 \cdot S2 + P_{Td}^3 \cdot S3)} \text{——Formula (11)}$$

P_T : Calculated load per block (N)

S1 : Traveling distance in accelerated motion (mm) (see Figure 4)


S2 : Traveling distance in uniform motion (mm) (see Figure 4)

S3 : Traveling distance in decelerated motion (mm) (see Figure 4)

P_{Ta} : Calculated load per block in accelerated motion (N) - Formulas (3), (6), (9)

P_{TC} : Calculated load per block in uniform motion (N) - Formulas (2), (5), (8)

P_{Td} : Calculated load per block in decelerated motion (N) - Formulas (4), (7), (10)

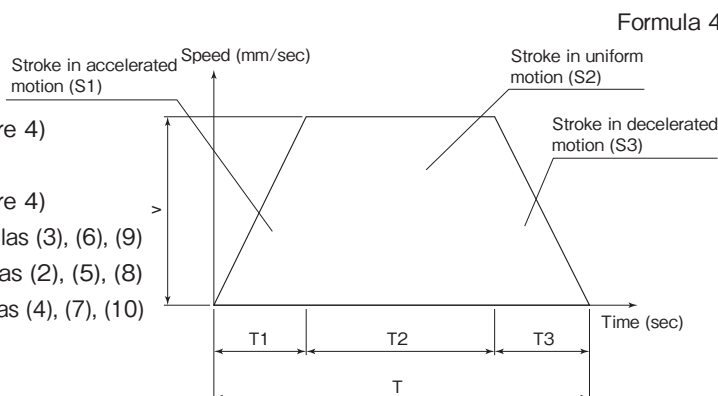

Formula 4

● LIFE EXPECTANCIES OF BALL SCREW AND SUPPORT BEARING

The life expectancies of the ball screw and the support bearing can be calculated using the following common calculation formula shown as below. Therefore, compare the dynamic load ratings of the ball screw and the support bearing and substitute a smaller value in the formula for calculation.

$$L_a = \left(\frac{1}{f_w} \cdot \frac{C_a \text{ or } C_b}{P_a} \right)^3 \cdot \ell \quad \text{Formula (12)}$$

L_a : Life expectancy operational length (km)

f_w : Load factor (see Table 2)

C_a : Basic dynamic load rating of ball screw (N)

C_b : Basic dynamic load rating of support bearing (N)

P_a : Ave. Axial load (N)

ℓ : Ball screw lead (mm)

● Calculation of P_a

To calculate the life expectancy using Formula (6), calculate P_a in consideration of acceleration. Calculate the axial load in uniform, accelerated, and decelerated motions and its average figure is used as P_a .

● In the Case of Horizontal Movement

① For uniform motion (P_{ac})

$$P_{ac} = m \cdot W + F + F_b \cdot n \quad \text{Formula (13)}$$

② For accelerated motion (P_{aa})

$$P_{aa} = m \cdot W + F + f_b \cdot n + (m + m_b \cdot n) \alpha_a \quad \text{Formula (14)}$$

③ For decelerated motion (P_{ad})

$$P_{ad} = m \cdot W + F + f_b \cdot n - (m + m_b \cdot n) \alpha_d \quad \text{Formula (15)}$$

P_{ac} : Axial load in uniform motion (N)

P_{aa} : Axial load in accelerated motion (N)

P_{ad} : Axial load in decelerated motion (N)

μ : Friction factor (0.006)

W : Load on block (N)

F : External force (load) in axial direction (N)

f_b : Slide resistance per block (N) (see Table 4)

n : Number of blocks of SG / SE

m : Load mass (kg)

m_b : Block mass of SG / SE (kg)

g : Gravitational acceleration (9.8 m / sec²)

α_a : Acceleration in accelerated motion (m / sec²)

α_d : Acceleration in decelerated motion (m / sec²)

● In the Case of Vertical Movement

① For uniform motion (P_{ac})

$$P_{ac} = (m + m_b \cdot n) g + F + f_b \cdot n \quad \text{Formula (16)}$$

② For accelerated motion (P_{aa})

$$P_{aa} = (m + m_b \cdot n) \cdot (g + \alpha_a) + F + f_b \cdot n \quad \text{Formula (17)}$$

③ For decelerated motion (P_{ad})

$$P_{ad} = (m + m_b \cdot n) \cdot (g - \alpha_d) + F + f_b \cdot n \quad \text{Formula (18)}$$

● Using one of the above calculation formulas according to your usage, calculate an average axial load (P_a).

$$P_a = \sqrt[3]{\frac{1}{(S1+S2+S3)} (P_{aa}^3 \cdot S1 + P_{ac}^3 \cdot S2 + P_{ad}^3 \cdot S3)} \quad \text{Formula (19)}$$

P_a : Average axial load (N)

$S1$: Traveling distance in accelerated motion (mm) (see Figure 4)

$S2$: Traveling distance in uniform motion (mm) (see Figure 4)

$S3$: Traveling distance in decelerated motion (mm) (see Figure 4)

P_{aa} : Axial load in accelerated motion (N) - Formulas (14), (17)

P_{ac} : Axial load in uniform motion (N) - Formulas (13), (16)

P_{ad} : Axial load in decelerated motion (N) - Formulas (15), (18)

Table 4 Slide resistance per block (f_b) (seal resistance)
(Unit: N)

Model No.	Accuracy grade	
	H	P
SG20	2.3	4.9
SG26	5.4	9.8
SG33	4.4	10.2
SG46	7.4	13.3
SG55	9	16

(Unit: N)

Model No.	Accuracy grade
	H/U/W
SE15	2.0
SE23, SC23	2.5
SE30, SC30	2.5
SE45, SC45	7.5


EXAMPLE OF BALLSCREW ACTUATOR SELECTION

● Linear motion robot - X-axis


<Specifications>

Mass of work and table: M	10kg
Load distribution	See right side diagram.
Maximum stroke: st	550mm
Fast-feed speed: v	500mm/s
Acceleration/deceleration time constant: t	0.2 s
Maximum motor speed	6000min ⁻¹
Orientating orientation	Horizontal
Repeated positioning accuracy	±0.01 mm or less
Expected life	30,000h

Load distribution diagram

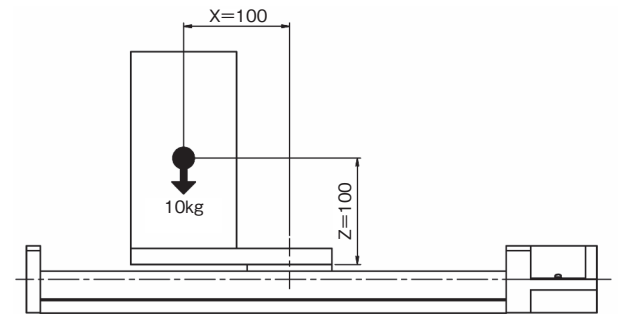

Duty cycle model diagram

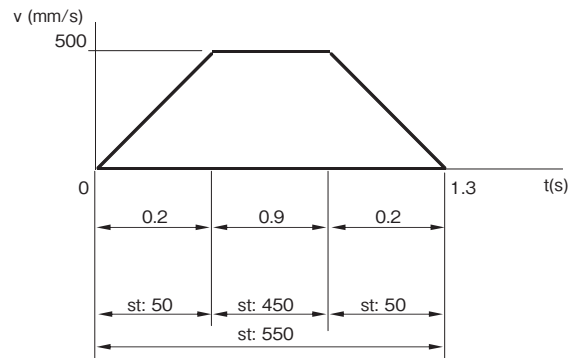

① Tentatively select SE4510A-740W-A1NN-NN in SE series, based on the conditions such as stroke and speed.

② Calculation of life expectancy

②-1. Calculating life expectancy of guide

Considering the usage with moment being loaded, average load and life expectancy were calculated in accordance with "LIFE EXPECTANCY OF GUIDE" on page 127, and they resulted in 1,274 N and 39,030 hours, respectively. The load coefficient for the above calculation was determined to be 2, based on the conditions of use.

②-2. Calculating expected life of ball screw and support bearings

Average axial load and life expectancy were calculated in accordance with "LIFE EXPECTANCIES OF BALL SCREW AND SUPPORT BEARING" on page 130, and the axial load resulted in 14.9 N and expected life of both ball screw and support bearing in over a million hours. The load coefficient for the above calculation was determined to be 2, based on the conditions of use.

③ Results of the selection

The above calculation results of life expectancies confirmed that the tentatively selected model would satisfy the required specifications. Since there is no other particular specification to be further considered, the model is selected officially.

Selected model of ballscrew actuator: SE4510A-740W-A1NN-NN

If longer life expectancy than the calculated life is preferred, make re-calculation after changing specifications, such as upgrading model size or adding extra slide block.


EXAMPLE OF BALLSCREW ACTUATOR SELECTION

● Lift - Z-axis


<Specifications>

Mass of work and table: M	6kg
Load distribution	See right side diagram.
Maximum stroke: st	350mm
Fast-feed speed: v	500mm/s
Acceleration/deceleration time constant: t	0.2 s
Maximum motor speed	6000min ⁻¹
Orientating orientation	Vertical
Repeated positioning accuracy	±0.003 mm or less
Life expectancy	40,000h

Load distribution diagram

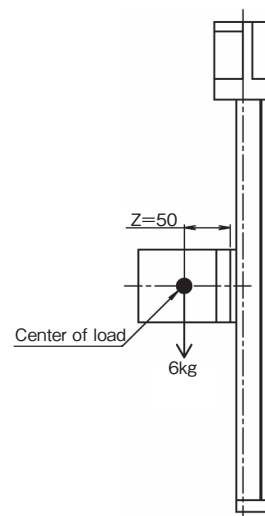

Duty cycle model diagram

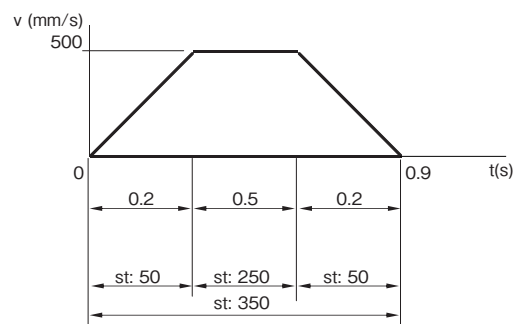

① Tentative selection of ballscrew actuator

Tentatively select SG3310A-500H-A0NN-NN in SG series, based on the conditions such as strokes and speed.

② Calculation of life expectancy

②-1. Calculating life expectancy of guide

Considering the usage with moment being loaded, average load and life expectancy were calculated in accordance with "LIFE EXPECTANCY OF GUIDE" on page 127, and they resulted in 805 N and 17,166 hours, respectively. The load coefficient for the above calculation was determined to be 2, based on the conditions of use.

②-2. Calculating expected life of ball screw and support bearing

Average axial load and life expectancy were calculated in accordance with "LIFE EXPECTANCIES OF BALL SCREW AND SUPPORT BEARING" on page 130, and the axial load resulted in 60N and expected life of ball screw and support bearing in 44,202 and 353,620 hours, respectively. The load coefficient for the above calculation was determined to be 2, based on the conditions of use.

③ Results of the selection

According to the above results of life expectancies, the life of the guide does not satisfy the life expectancy requirement. Since the ball screw and support bearing have satisfactory life expectancies, make re-calculation after changing the block on the guide. Leaving the guide rail length and required stroke as they are, change the model to SG3310D-500H-A0NN-NN.

④ Re-calculation of life

As in the previous step, average load and life expectancy were calculated in accordance with "LIFE EXPECTANCY OF GUIDE" on page 127, and they resulted in 198 N (load per block) and 146,740 hours, respectively.

⑤ Results of the re-selection

The results of re-calculation of life expectancy of the guide confirmed that the selected model would satisfy required hours of life expectancy.

BALLSCREW ACTUATOR SPECIFICATION DATA SHEET

Company Name		Date	
Department		Contact personnel	
Address		Tel / Fax	
Name of Equipment/machine used		Location of use	
Drawing/conceptual drawing attached?	<input type="checkbox"/> Yes pieces of pages		<input type="checkbox"/> No

Conditions of Use (Either unit system may be used.)

Mass of work and table (kg)			
Operating orientation	<input type="checkbox"/> Horizontal <input type="checkbox"/> Vertical <input type="checkbox"/> Wall installation		
Maximum table speed (mm/s)		Maximum table stroke (mm)	
Expected life (h)			
Operating conditions			
<div style="display: flex; justify-content: space-around;"> <div> <p>Max.Speed</p> <p>mm/s</p> <p>0</p> <p>Accel.</p> <p>Cons.</p> <p>Decel.</p> <p>Time</p> <p>Distance</p> </div> <div> <p>Hold Time</p> <p>s</p> <p>s, mm</p> <p>Positioning Time</p> <p>s</p> <p>Positioning Time (Stroke)</p> <p>mm</p> </div> </div>			
Load distribution (see below)	X = mm	Y = mm	Z = mm
Horizontal		Vertical	
Wall installation			
Grease (brand) / Unless otherwise specified, Multemp PS No. 2 Grease (KYODO YUSHI CO.,LTD.) will be used as lubricant.			
Environmental conditions	Temp.	Dust	Humidity
			%
Name of motor	Parallel motor mounting		
	<input type="checkbox"/> Required <input type="checkbox"/> Not required		
Actuator quantity per a machine	Quantity for prototype		
Quantity of mass production	<input type="checkbox"/> Yes <input type="checkbox"/> No		

Ballscrew actuator specifications

Size		Lead		Slide block		Guide rail length		Precision grade	
Dust-preventive cover		Sensor	Type:	Qty:		Surface treatment			

Additional description / request

*KURODA office	*Contact personnel